AD-779 466

HYDRAULIC SYSTEM NOISE STUDY

OKLAHOMA STATE UNIVERSITY

PREPARED FOR
ARMY MOBILITY EQUIPMENT RESEARCH AND
DEVELOPMENT CENTER

DECEMBER 1973

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

AD- 779 466

REPORT DOCUMENTATION PAGE		READ INSTRUCTIONS BEFORE COMPLETING FORM
1. REPORT NUMBER FPRC-3M3	2. GOVT ACCESSION NO.	3. RECIPIENT'S CATALOG NUMBER
4. TITLE (and Subtitle) HYDRAULIC SYSTEM NOISE STUDY		5 TYPE OF REPORT & PERIOD COVERED Annual, Section III of 5 June 1972 – November 1973
		6 PERFORMING ORG. REPORT NUMBER FPRC-3M3
7 AUTHOR(s) Staff of the Fluid Power Research Center		8. CONTRACT OR GRANT NUMBER(s) Contract No. DAAK02-73-C- 0172
9 PERFORMING ORGANIZATION NAME AND ADDRESS Fluid Power Research Center Oklahoma State University Stillwater, Oklahoma 74074		10. PROGRAM ELEMENT, PROJECT, TASK AREA & WORK UNIT NUMBERS
11. CONTROLLING OFFICE NAME AND ADDRESS Directorate of Research, Development, & Engineering U.S. Army Mobility Equipment Command Ft. Belvoir, Virginia 22060		12. REPORT DATE December 1973
		13 NUMBER OF PAGES 131
14 MONITORING AGENCY NAME & ADDRESS(if different from Controlling Office)		15. SECURITY CLASS. (of this report) UNCLASSIFIED
		15a. DECLASSIFICATION/DOWNGRADING SCHEDULE

16. DISTRIBUTION STATEMENT (of this Report)

Approved for Public Release: Distribution Unlimited

17. DISTRIBUTION STATEMENT (of the abstract entered in Block 20, if different from Report)

18. SUPPLEMENTARY NOTES

N/A

19. KEY WORDS (Continue on reverse side if necessary and identify by block number)

Hydraulic Noise
Sound Measurement
Component Sound Levels

Airborne Noise
Fluid-Borne Noise
Structure-Borne Noise

20. ABSTRACT (Continue on reverse side if necessary and identify by block number)

The purpose of the OSU-MERDC Hydraulic Specification Program is to develop industrially acceptable test procedures and requirement specifications relative to the performance of hydraulic components and systems to facilitate the military's *buy commercial* approach. Although the program has been aimed toward components and systems for future 3000 psi operating pressure levels, it was intended that the test procedures be applicable to any pressure level.   (over)

DD FORM 1 JAN 73 1473   EDITION OF 1 NOV 65 IS OBSOLETE

SECURITY CLASSIFICATION OF THIS PAGE (When Data Entered)

This report presents a detailed account of the experimental verification part of the hydraulic noise study. Test procedures for the measurement of hydraulic component noise developed under this contract are presented and experimentally verified. A summary of the work performed on measurement facility verification is presented. The acoustical properties of selected military fluid power components are presented and compared to a spectrum of current production components from industry. Specific recommendations are made for continuing the effort to understand and control hydraulic noise.

TABLE OF CONTENTS

i

ii

LIST OF TABLES

LIST OF FIGURES

v

FOREWORD

This report was prepared by the staff of the Fluid Power Research Center of the School of Mechanical and Aerospace Engineering at Oklahoma State University of Agriculture and Applied Science. The study was initiated by the Mobility Equipment Research and Development Center, Fort Belvoir, Virginia. Authorization for the study reported herein was granted under Contract No. DAAK02-72-C-0172. The time period covered by this report is from 9 November 1972 to 8 November 1973.

The Contracting Officer's Representative was Mr. Hansel Y. Smith, and Mr. John Karhnak served as the Contracting Officer's Technical Representative. In addition, Mr. Paul Hopler has effectively represented the Contracting Officer both administratively and technically in various phases of this contract. The active participation of Messrs. Smith, Karhnak, and Hopler during critical phases of this work contributed significantly to the overall success of the program. Project members are grateful for the assistance of Mr. Sam Wehr, U.S. Army MERDC, and Mr. John Hufeld, Caterpillar Tractor Co.

In addition to pursuing the goals and objectives of this contract to fruition, members of the Fluid Power Research Center (FPRC) staff have also participated with MERDC personnel in various activities not supported by the program. These efforts were financed through the Basic Fluid Power Research (BFPR) Program, which is a consortium of some 35 industrial fluid power users and suppliers who have sponsored work at the FPRC for the past seven years. These companies have recognized the merits and the derivable benefits of this Hydraulic Specification Study Program and have readily contributed both time and money to its success.

A great many fluid power component test procedures have been developed and verified as a result of this program. The guidance and advice of the fluid power industry were heavily relied upon during all phases of this development and verification work. However, true industrial acceptance can only be achieved when such test procedures receive national and international adoption by recognized standard-making bodies of the fluid power industry. To this end, members of the FPRC staff have worked closely with the National Fluid Power Association (NFPA), the society of Automotive Engineers (SAE), the American National Standards Institute (ANSI), and the International Standards Organization (ISO).

Specifically, in behalf of MERDC and the fluid power industry, the FPRC has played an active role in the activities of the following committees and sub-committees:

* Filter and Separator Section of NFPA
* Contamination Coordinating Committee of NFPA

1

* Pump Section of NFPA
* Valve Section of NFPA
* Sound Measurement Coordinating Committee
* Sub-Committee IV (hydraulic Components) of SAE
* Sub-Committee 6 of TC 131 (Fluid and Contamination Control) of ISO
* Sub-Committee 8 of TC 131 (Component Testing) of ISO
* Working Group 1 of SC-6 (Filter Performance Testing) ISO/TC 131
* Working Group 1 of SC-8 (Sound Measurement) ISO/TC 131

During the reporting period of this document , the main efforts in technical information transfer have been directed toward the areas of filter performance, pump contaminant sensitivity, valve performance, and sound measurement. The results of this work, to date, served as the basis for eight nationally and internationally accepted test procedures. The fruits of such accomplishements should prove very beneficial to MERDC in their quest for adequate component control in the procurement of commercial equipment.

The FPRC team has also assisted MERDC in their effort to effectively monitor and evaluate the results of tests using test procedures developed under this program. For example, a computer program was developed which rigorously examines the data accumulated during a multipass filter performance test. This program not only reduces the data to a usable form but also evaluates the recorded data to see that all of the test requirements have been met. The success of this computer program together with the industrial acceptance of the filter test procedures has allowed MERDC to issue a military filter specification and establish a well received QPL program.

This report represents only one of four major sections of the annual report on the Hydraulic Specification Program. The titles of the various sections are listed below:

SECTION I: Hydraulic Cylinder and Seals Specification Study
SECTION II: Hydraulic System Controls Study
SECTION III: Hydraulic System Noise Study
SECTION IV: Hydraulic Hose Specification Study

The study represented by this report was conducted under the general guidance of Dr. E. C. Fitch, Program Director. Mr. L. R. Elliott served as Project Engineer for the noise study and was commendably guided by Mr. G.E. Maroney, Program Manager. Dr. Fitch, Mr. Maroney, and Mr. Elliott were ably supported by the Fluid Power Research Center's Acoustics Laboratory, experimentally by Mr. T. G. Snyder, Mr. J. R. Wells, and Mr. S. E. Smith, and in general coordination by Mr. R. K. Tessmann.

This report presents a detailed account of the experimental verification part of the hydraulic noise study. Test procedures for the measurement of hydraulic component noise developed under this contract are presented and experimentally verified. A summary of the work per-

2

formed on measurement facility verification is presented. The acoustical properties of selected military fluid power components are presented and compared to a spectrum of current production components from industry. Specific recommendations are made for continuing the effort to understand and control hydraulic noise.

Chapter I

INTRODUCTION

The importance of understanding the generation, transmission, and radiation of acoustic energy within and from fluid power systems is increasing as the engineer in industry solves the non-fluid power oriented noise problems on current production mobile equipment. The noise problems associated with fluid power systems can be somewhat more complex than other noise problems on mobile equipment, due to the high concentration of energy within a relatively small volume and the necessity to distribute that small volume and, hence, the energy to all parts of a machine. The magnitude of the difficulties that are to be encountered during the solution of any fluid power system problem is evident only after one realizes that fluid power systems are not point sources of noise. They are highly distributed and interact with other systems and the total machine. A knowledge of the interactions between components within a given system and the interactions of total systems is mandatory for proper solution of noise problems in complex machines. The starting point to understanding these interactions is, logically, the measurement of the acoustical characteristics of the components that make up fluid power systems and the systems which might interact with the fluid power system. The intelligible acquisition of this type of information is based to a large degree upon the validity of the data acquisition method used.

The development of acceptable measurement techniques is a necessary and desirable by-product of the program objectives that are diagrammed in Fig. 1-1. The combination of basic acoustical theory into a usable and reliable form of test procedure was the initial and has been a continuing effort at the Fluid Power Research Center. Discussion of the current status of the proposed airborne and fluid-borne noise measurement procedures is presented in Chapter II of this report. Drafts of the airborne and fluid-borne test procedures are found in Appendices F and G respectively.

Prior to implementing the test procedures discussed in Chapter II, the test environment in which the measurements are to be obtained must be evaluated to determine its suitability as an acoustical test facility. A discussion of the International Organization for Standardization (ISO) Recommended Techniques for verifying the measurement properties of acoustical test facilities and an experimental technique for optimizing reverberant environment diffusivity are presented in Chapter III of this report. The results of the application of both the optimization procedure and the proper verification procedure on the Fluid Power Research Center's reverberant test facility are discussed in detail.
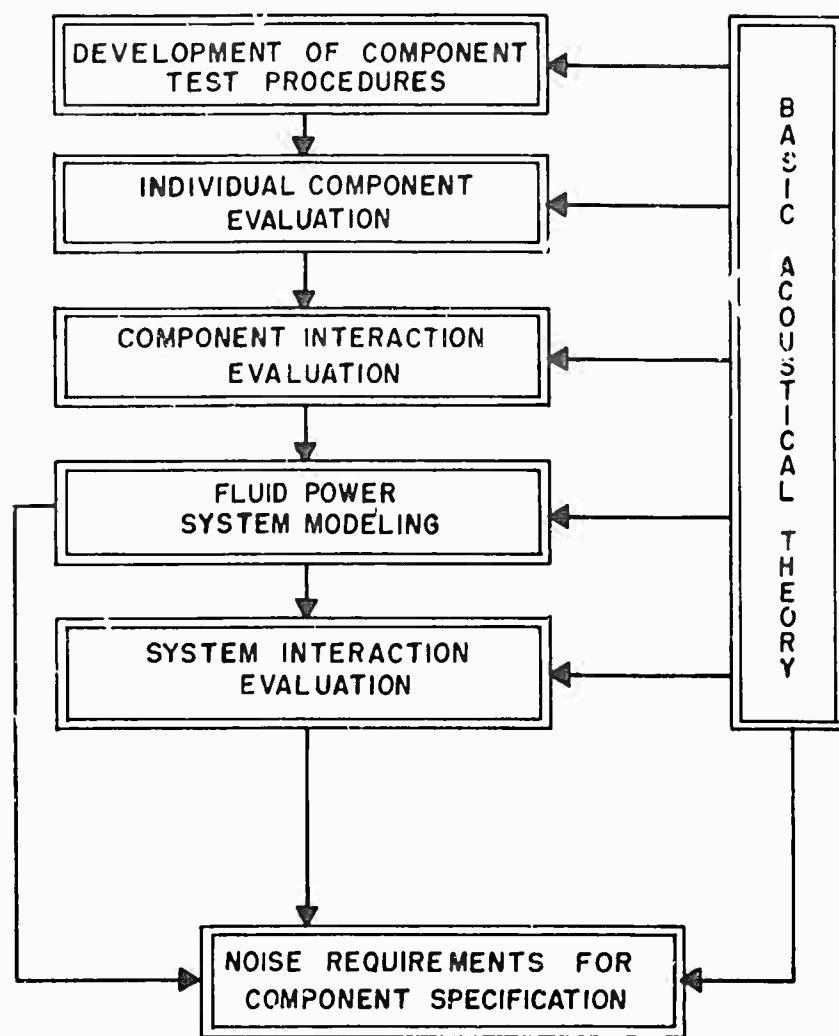
Fig. 1-1. 1972-1974 Hydraulic System Noise Study Program Objectives.

The acoustical evaluation of specific components from the military D7F Crawler Tractor (DV29) and the comparison of their properties with other production components from the fluid power industry have been major objectives of the 1972-73 program. These objectives are graphically illustrated in Fig. 1-2. An extensive set of tests were performed on pump group 5R714 from the D7F. The pump group was acoustically evaluated before and after contamination testing. The results of the contaminant test, acoustic tests, and acoustical comparison of pump group 5R714 with 22 other fluid power pumps are presented in Chapter IV.

It has become evident that a great deal of acoustical energy is contained in and radiated from the conduits of fluid power systems. The fluid-borne noise (pressure ripple) in the working fluid functions as a driving force for conduit vibrations. Vibration of the outer surface of conduits can excite any structural member to which they are attached or radiate pressure waves (sound) directly into the air. It is possible to derive transfer functions that will predict the amount of airborne noise that can be expected from a given number of feet of a particular type of conduit for a known fluid-borne noise forcing function. This type of information is necessary if one of the ultimate objectives is the prediction of fluid power system noise levels. The deriviation of conduit transfer functions and a comparison of the predicted and experimental results of tests performed on two 54" sections of 3/4" Caterpillar flexible conduit and two 54" sections of 1" Caterpillar flexible conduit are presented in Chapter V.

Two versions of the military relief valve 5R717 were examined to determine their acoustical output. The housings for the two relief valves were different. The military version (5R717) is built within a large manifold, and the commercial version (6J1746) contains standard pipe-threaded ports. The pressure-flow characteristics of the 6J7146 relief valve are presented with the results of the airborne noise measurements in Chapter VI.

Chapter VII contains a discussion of the progress that has been accomplished on the contract extension which started June 1973. The final chapter contains a brief summary of the material presented in this report, conclusions that may be drawn from the material present herein, and specific recommendations based on the results contained in this report.

7

Test 8. Line With Relief Valve	
Test 7. Line With Needle Valve	
Test 6. Valve With Pump Characteristic "β"	
Test 5. Valve With Pump Characteristic "A"	
Test 4. Worn Pump With Relief Valve	
Test 3. Worn Pump With Needle Valve	
Test 2. Pump With Relief Valve	
Test 1. Pump With Needle Valve	
Sound Power Level	xx
Hydraulic Power Level	yy
Acceleration Power Level	zz
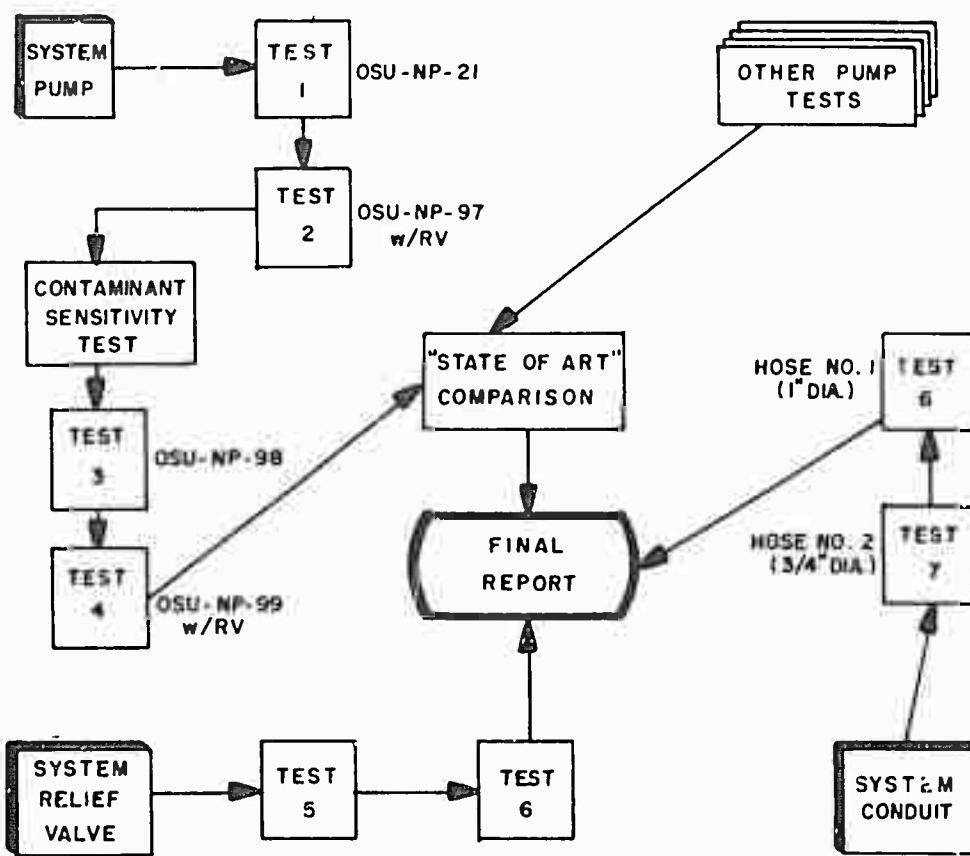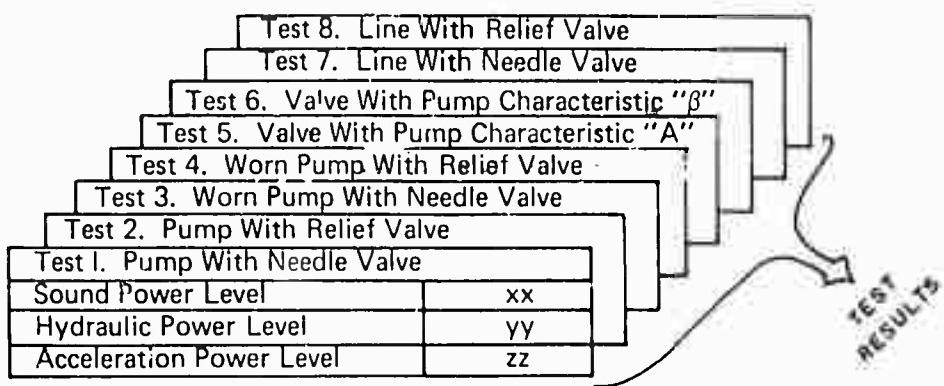
Fig. 1-2. Illustration of Component Acoustical Evaluations for 1972-1973 Program.

8

CHAPTER II

TEST PROCEDURE DEVELOPMENT & UTILIZATION

The goals of the '72-'73 project and the '73-'74 project are pre-
dicated on the availability and use of acceptable acoustical test proce-
dures. The industrial acceptance of an airborne test procedure for
pump noise during the past year adds validity to the data presented in
this report, since the reported data were obtained using a test code
which complies with the accepted method. Because of the dynamic status
of noise test codes for fluid power components, it is imperative that
project personnel actively participate in the development and verifica-
tion of those procedures. The active participation of project members
will insure the proper interpretation of the data acquired on this pro-
ject.

This chapter summarizes the development of test codes for measuring
hydraulic component airborne noise (ABN) and fluid-borne noise (FBN).
Structure-borne noise (SBN) measurement methods are also discussed in
this chapter. Proposed procedures for measuring fluid component air-
borne and fluid-borne noise are presented in Appendices F and G respec-
tively. Specific methods used to obtain the results reported in this
document are compared to the recommended procedures.

-TEST CODE -- AIRBORNE NOISE -

The 1972 Annual Report, "Hydraulic System Noise Study," (AD 757776)
presented a "Test Code for Measuring and Reporting Airborne Noise Emit-
ted By Hydraulic Fluid Power Pumps," which was developed by a Tri-Level
Conference on Noise. The Tri-Level Conference was convened by the
American National Standards Institute, the U.S. Technical Advisory Group
(USTAG) to the International Organization for Standardization (ISO), and
the National Fluid Power Association. One project member participated
in the Tri-Level Conference and subsequently was elected as a U.S. member
of ISO Working Group I to Sub-Committee 8, Technical Committee 131
(ISO/TC 131/SC8/WG1).

Appendix F presents a "Test Code for Measuring and Reporting Sound
Generated by Hydraulic Pumps," which is a draft of the thinking outlined
by ISO/TC 131/SC8/WG1 during their first meeting of 3-4 May 1973. The
document developed by the Tri-Level Conference served as a starting point
for the WG1 document. WG1 members established excellent rapport during
their first meeting. It is anticipated that the document they develop

9

will be realistic and practical. The schedule established by WG1 includes forwarding a final draft document to SC8 by June 1974.

The basic approach outlined in the WG1 test code can reac .ly be extended to hydraulic motors, valves, and conduits. The **procedure** is consistent with previous NFPA documents and thus should be well accepted by the U.S. fluid power industry.

For a given operating condition, the WG1 test code requires the reporting of sound power level at each octave center frequency between 125 Hz and 8000 Hz plus the weighted sound power of the pump in dBA.

All of the airborne noise data presented in this report were obtained using a test method which is consistent with the requirements presented in Appendix F. The data obtained using a test facility which meets the ISO performance requirements of a precision reverberant environment.

Project personnel plan to follow the development of the airborne noise test code by participating in WG1. The WG1 meeting is scheduled for May 1974. It is anticipated that WG1 will be able to extend the basic test code to airborne noise test codes for other hydraulic components.

- TEST CODE -- FLUID-BORNE NOISE -

Development of a test code for measuring and reporting the fluid-borne noise generated by hydraulic pumps appears to have been relegated to a secondary position by the industry. This is probably due to the fact that the industry has more experience with airborne test code development.

Appendix G presents one approach to measuring pump fluid-borne noise. The basic approach represented by the document in Appendix G is to install an attenuator downstream of the pump which attenuates the pump ripple such that no acoustic energy is reflected back to the pump. This approach "eliminates" standing waves in the high pressure line, creating essentially a "free-field" environment for pressure measurements. Resultant pressure measurements between the pump and the attenuator could be related to the pump flow ripple given the apparent bulk modulus in the high-pressure line and the volume of the line.

Another approach recommended for measuring pump flow ripple effects is based on locating the load device directly adjacent to the pump. This approach would minimize the effects of standing waves if the connecting line were short enough so that the first standing wave frequency was well above the fundamental frequency of the pump.

The first method requires the use of an "anechoic termination" in each each facility. One project objective for next year is the evalua-

10

tion of an attenuator which is advertised to provide a fluid-borne noise anechoic termination.

The second method requires the use of a relatively short (3" or less) outlet Tubing. The small volume of the outlet conduit could make it difficult to accurately determine an "apparent" bulk modulus. One solution to this problem might be a standard test fixture. This approach will be studied during next year's investigations.

It is anticipated that NFPA will initiate a fluid-borne noise test code development effort during the next year. Project members will co-operate in every possible manner to help insure that this important area progresses at a reasonable rate. Regardless of industrial efforts, the project will be used for future fluid-borne measurements.

The fluid-borne noise data reported in this document are reported relative to $20\mu N/M^2$. The pump data were obtained using basically the same fluid circuit for each test. For the pump tests, a pressure trans-ducer was located adjacent to the pump outlet. The measurements are relative but should not be considered absolute, since they would, in gen-eral, be different in a different hydraulic circuit. The performance parameter of interest relative to the pump is the flow ripple as a function of pressure, viscosity, shaft speed, etc.

The fluid-borne noise reported for the relief valves was recorded using one transducer in the high-pressure line adjacent to the valve. These measurements are a function of the pump and the circuit. But, the resultant spectra of level versus frequence should show any special noise contributions due to the valve.

The measurements of fluid-borne noise associated with the hydraulic conduits were made using three transducer locations. The three measure-ments were averaged to establish the correlations between fluid-borne noise and airborne noise for the conduits.

- TEST CODE -- STRUCTURE-BORNE NOISE -

The structure-borne noise data presented in this report were obtain-ed using the guidelines presented in Mil-Std-740B. All measurements on the pumps and valves were made using a magnetic attaching device. The measurements on the conduits were made by fastening the transducer to a threaded stud, which was welded to a hose clamp fastened to the conduit.

Single-point measurements at various locations on the pumps and valves were made for comparison purposes only. A direct correlation be-tween structure-borne measurements and airborne measurements would nor-mally require a large amount of structure-borne data.

Structure-borne measurements on the conduits were the result of an average of three measurements at each axial location. Each of the three

11

measurements at one axial position was made at a different angular orientation on the surface of the conduit.

Component airborne noise is the integrated result of structure-borne noise, which in turn causes airborne noise. In both cases, structure-borne noise is the intermediate vibration. Because of the importance of fluid-borne and airborne noise test codes, project personnel have concentrated on these areas. No major development effort on a structure-borne test code is anticipated until the airborne and fluid-borne procedures are completed.

CHAPTER III

FACILITY VERIFICATION

- INTRODUCTION -

Through growing concern and legislation on noise ocntrol, it has become essential that acoustical test facilities can be able to produce accurate and repeatable acoustical measurements. Before testing programs can be initiated which yield reproducible results, the performance of acoustical environments must be evaluated. Meaningful comparison of data produced by different measurement facilities is dependent on the accuracy obtained within each facility. Guidelines have been set forth by the International Organization for Standardization (ISO) for the verification of acoustical environments. The ISO procedures allow precision measurements to be made in anechoic, semi-anechoic, and reverberant environments which meet specific requirements. In accordance with these guidelines, a verification of the measurement properties of the OSU-FPRC reverberant environment has been performed.

Diffusivity is a measure of the variation of sound level in a reverberant environment [1]. The repeatability that can be achieved in a reverberant facility is directly related to the diffusivity that is attained in the environment. Diffusivity modification in reverberant environments can be attained through the use of rotating planes and moving microphones. Three diffusers are used in the Fluid Power Research Center's Reverberant Room to improve its diffusivity. Fig. 3-1 shows the effect of the three diffusers on measurement standard deviation for different pure tone sounds and varying diffuser RPM. Figs. 3-1a and 3-1b are two-dimensional planes, and Fig. 3-1c is a three dimensional diffuser.

From Figs. 3-1a and 3-1b, it is seen that the large two-dimensional diffusers are very effective in dispersing low-frequency standing waves. Large two-dimensional diffusers are practical for several reasons. One reason being simplicity of design. A thorough discussion of the advantages and disadvantages of both types of diffusers is presented in Ref. [2].

- DIFFUSIVITY OPTIMIZATION -

There are several guidelines that can be used to optimize the diffusivity of acoustical environments [2]. The recommended sound source to be used in determining the optimal diffuser speed is pure tone, since the largest variation in sound occurs with this type of signal. The sound-producing equipment should not be a significant source of noise variation. With the microphone at one position and without diffusers in operation, the

13
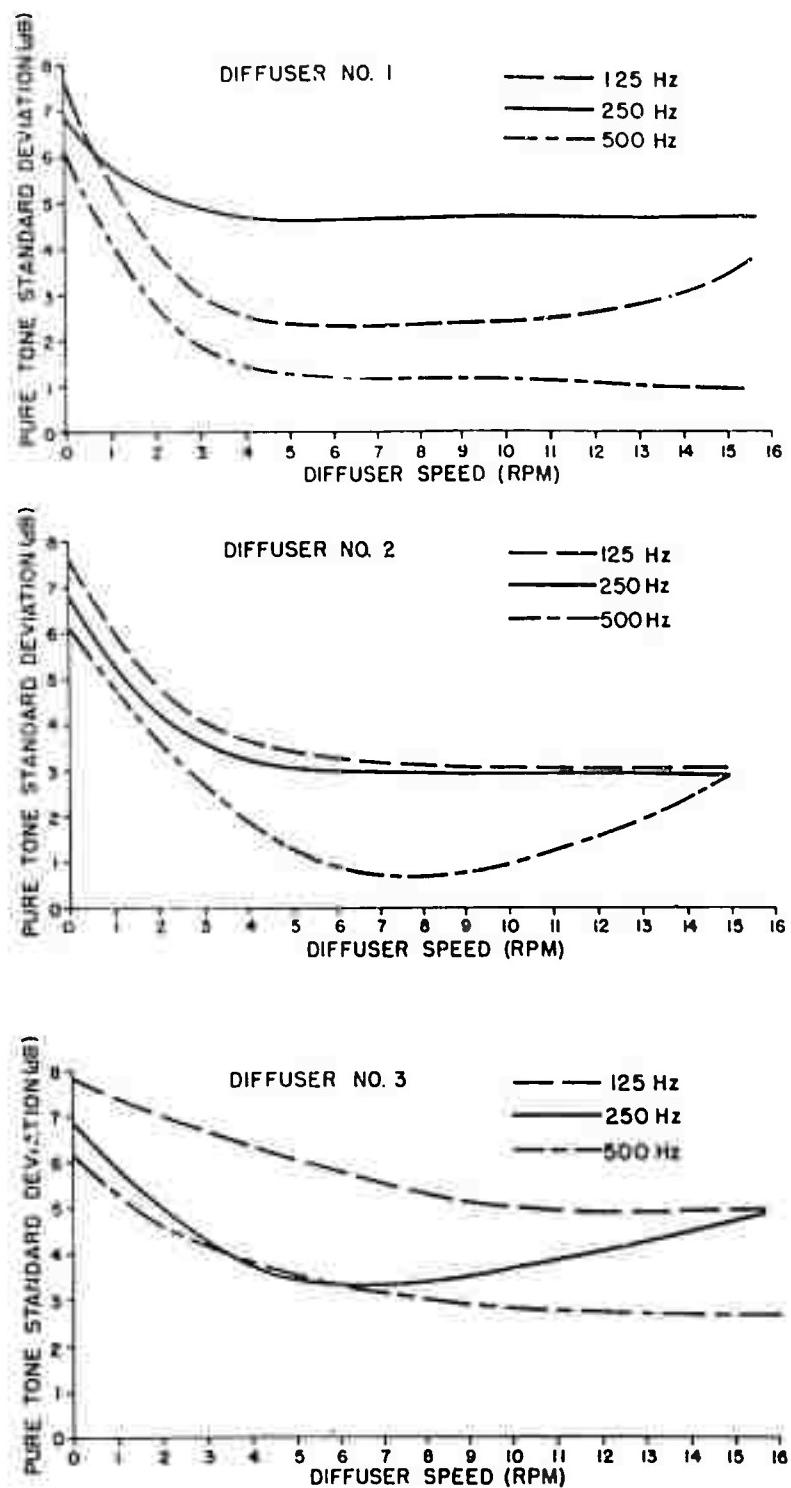
Fig. 3-1. Pure Tone Standard Deviation in OSU-FPRC Reverberant Facility
for Each of Three Diffusers Operating Separately at Various Speeds.

14

the stability of the source and instrumentation will be indicated by the amount of variation of the measured sound level. Fig. 3-2 shows the difference in standard deviation that should occur for several measurements at one position and one measurement at several positions.

The first step in diffusivity optimization is locating the frequency with the largest standard deviation for a given facility. This frequency will normally be the lowest frequency of interest. This critical frequency may be located experimentally by measuring the sound level at six or more positions in the room for each 1/3 octave center frequency without the diffusers operating. The standard deviation may be approximated with the equation:

$$\sigma = X \cdot R$$

σ = standard deviation
R = range of **the measurements**
X = constant from Table 3-1

TABLE 3-1: Constant Factors for Standard Deviation Approximation

Number of Measurements	$\sigma/R = X$
2	0.886
3	0.591
4	0.486
5	0.430
6	0.395

Optimal diffuser speeds are determined using curves of standard deviation versus diffuser rpm, such as shown in Fig. 3-1. Once the diffuser speeds are selected, facility verification can begin. Fig. 3-3 shows the magnitude of standard deviation without diffusers in operation and with diffusers operating in the OSU-FPRC or acoustical test facility. The standard deviations shown in Fig. 3-3 were obtained using 10 and 6 microphone positions for the no-diffuser and diffuser curves respectively.

- REVERBERANT FACILITY VERIFICATION AT OSU FPRC -

The latest ISO recommended procedures for verification of the measurement properties of acoustical test facilities contain techniques for broad-band and pure-tone noise sources. A minimum of six measurements are required at each center frequency of interest. The standard deviation is computed with the following equation:

15
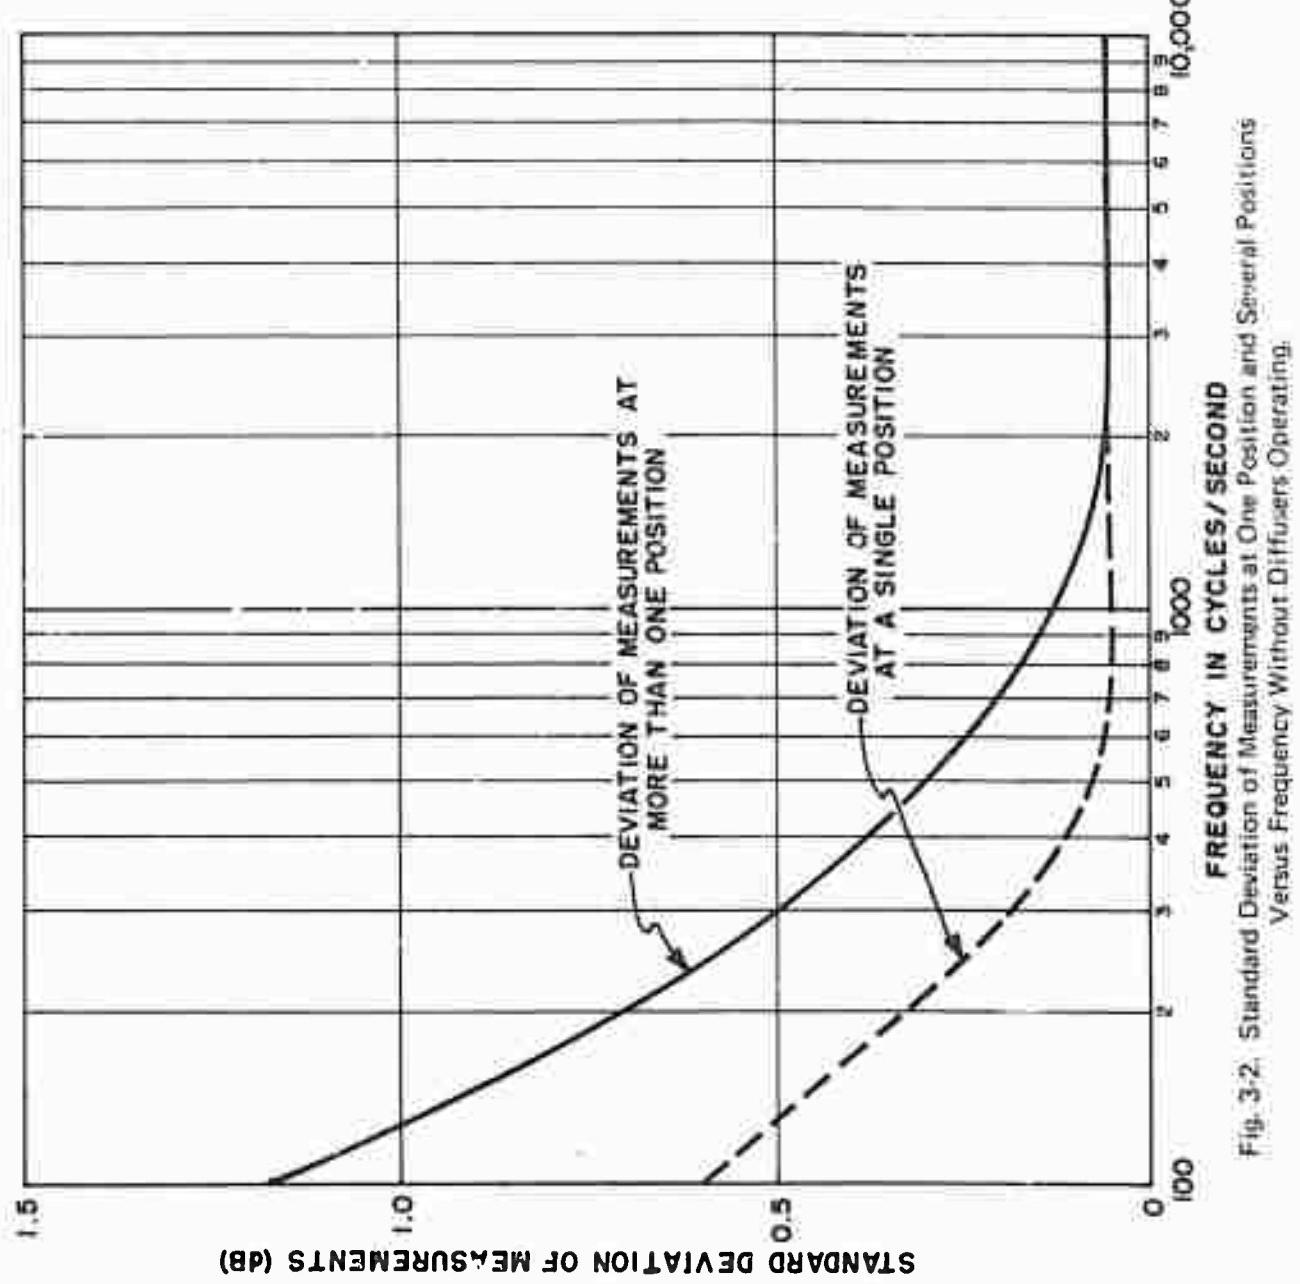
Fig. 3-2. Standard Deviation of Measurements at One Position and Several Positions Versus Frequency Without Diffusers Operating.

16

SOUND POWER GRAPH
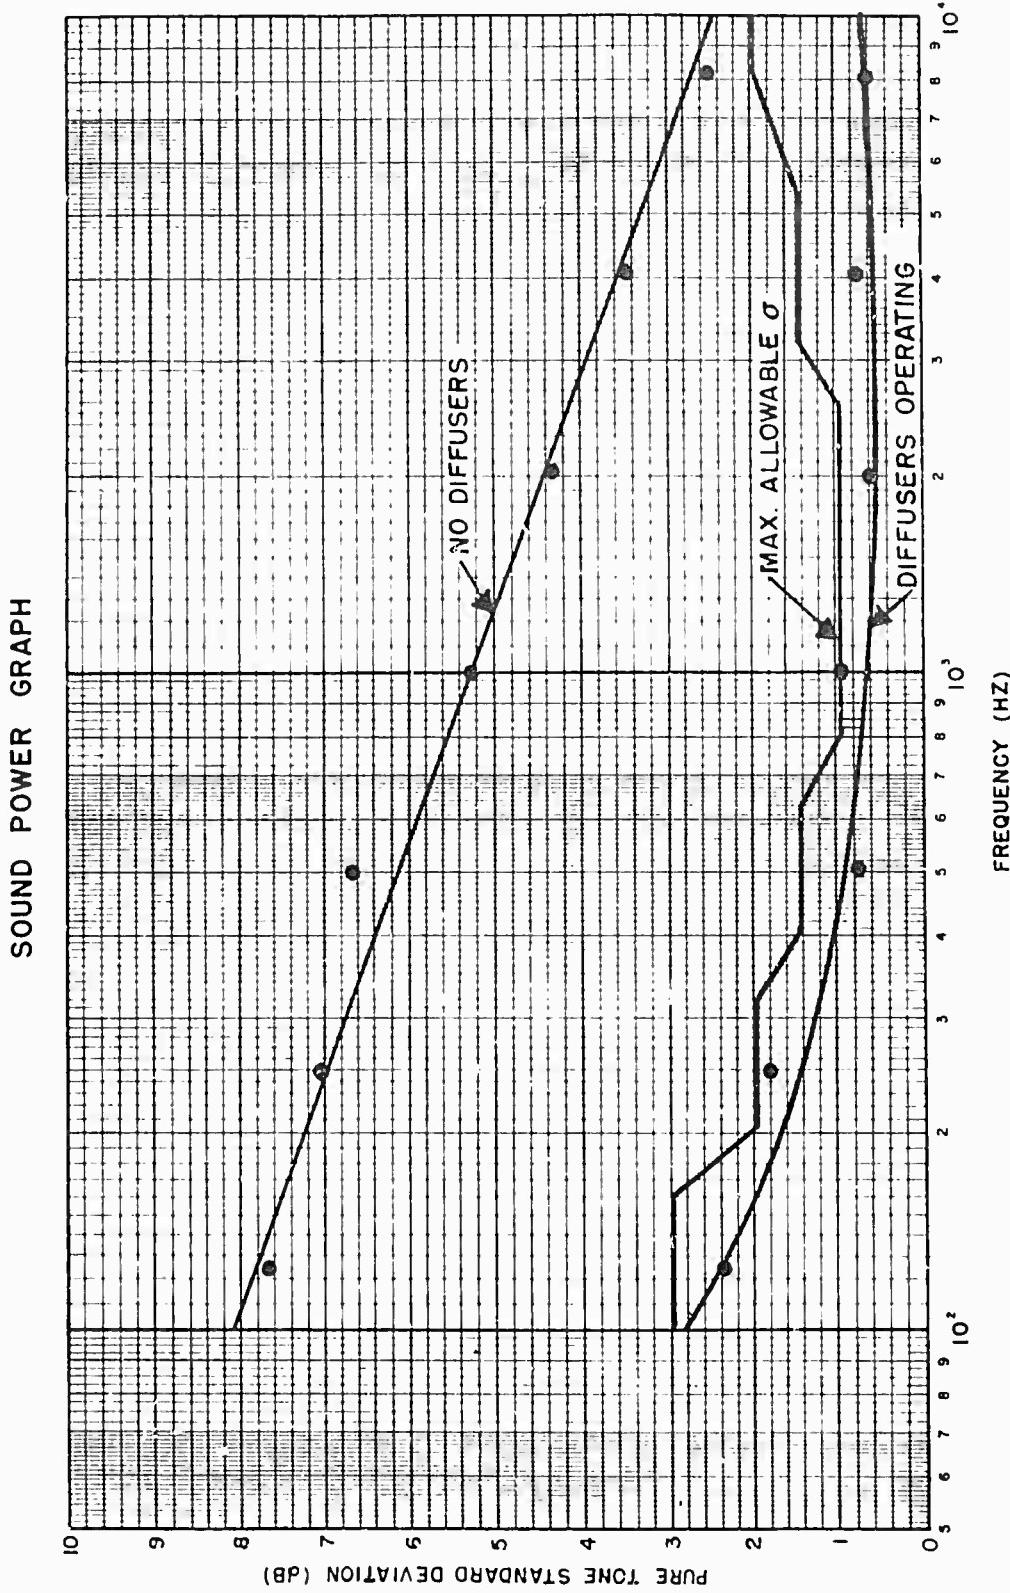
Fig. 3-3. Pure Tone Standard Deviation Versus Frequency for OSU-FPRC Reverberant Facility.

17

$$S = [\sum_{i=1}^{N} (X_i - \bar{X})^2]^{1/2} (N - 1)^{-1/2}$$

Where:

S = standard deviation

X_i = sound level measurement at i[th] position in decibels

$\bar{\bar{X}}$ = arithmetic mean of N measurements in decibels

Fig. 3-4 shows verification results as standard deviation versus frequency for broad-band sources. Fig. 3-5 shows the verification results for a pure-tone source. The standard deviation of an acoustical measurement facility must be less than the maximum allowable standard deviation shown in the two figures to be used as a precision measurement facility according to the recommendations fo the International Organization for Standardization.

- CONCLUSION -

Verification of measurement facilities is a must in order to obtain repeatable and reproducible data. The ISO recommendations provide a practicle analysis of acoustical properties of measurement facilities. According to ISO recommended test procedures the OSU-FPRC Acoustical Test Facility is a precision environment.
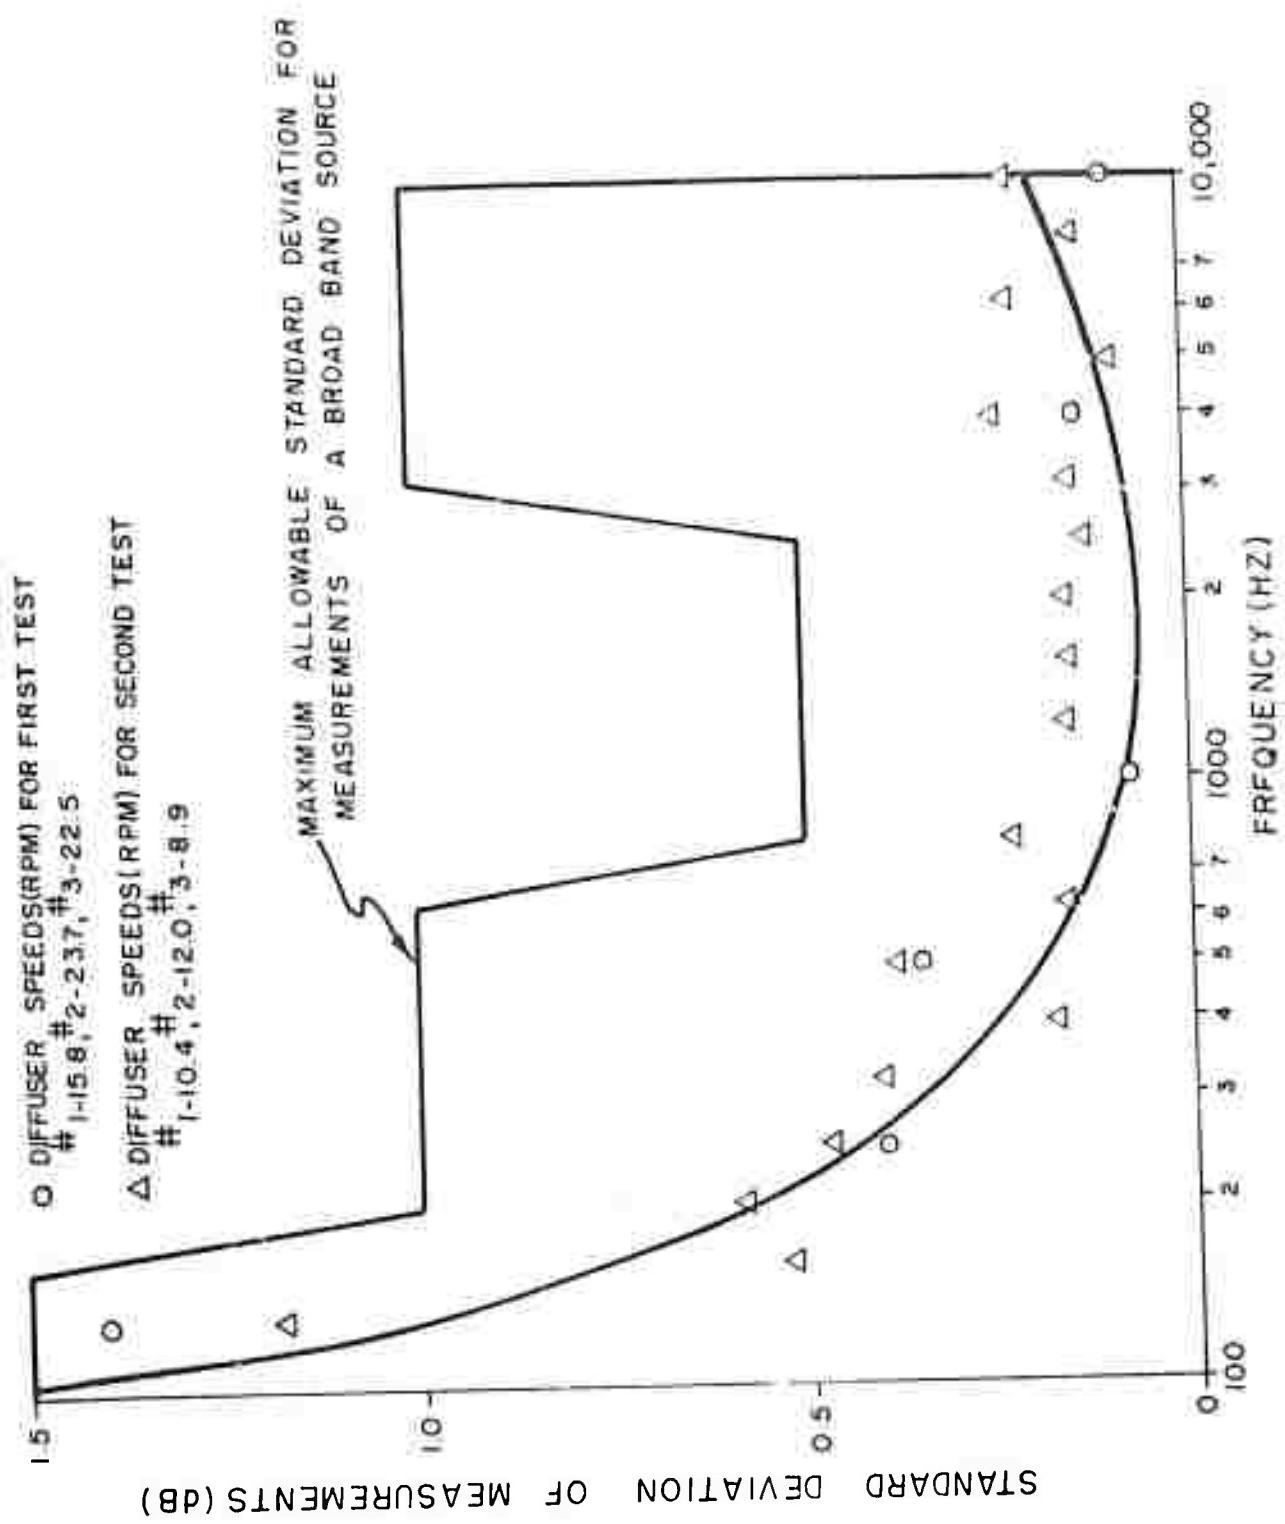
Fig. 3-4. Standard Deviation of Measurements in OSU-FPRC Reverberant Facility for a Broad Band Source With Three Diffusers Operating.

19
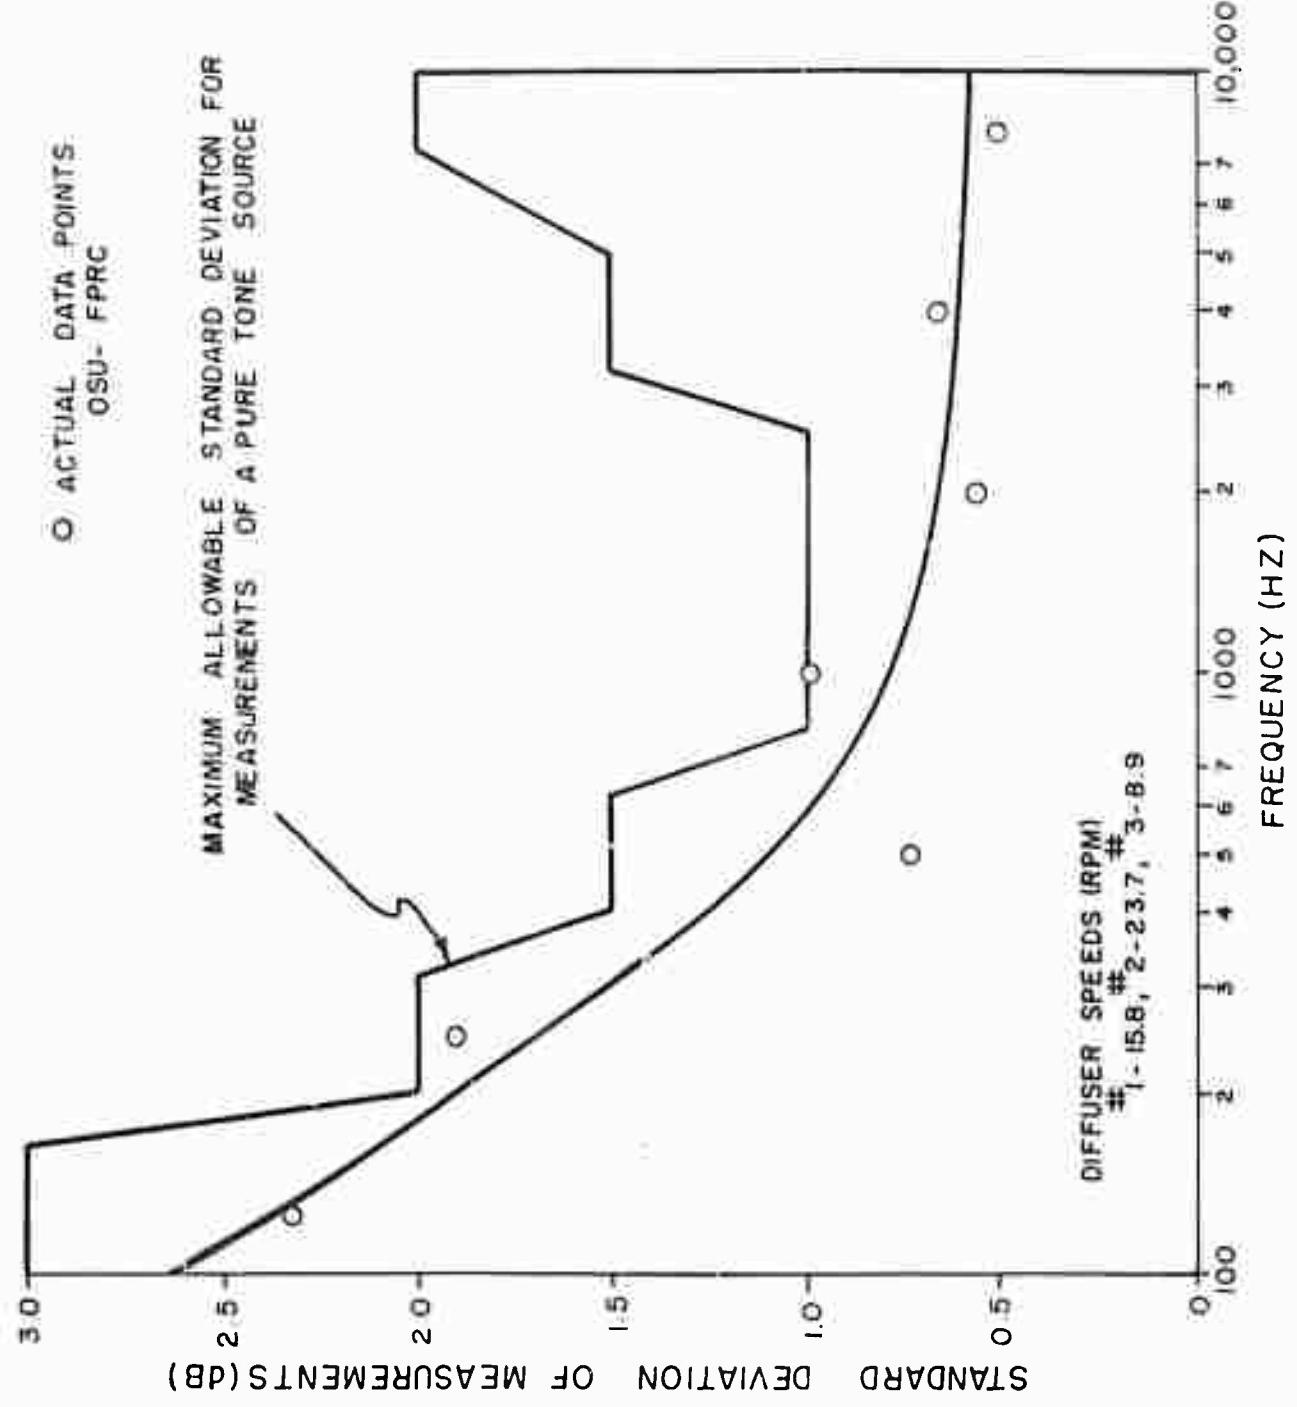
Fig. 3-5. Standard Deviation of Measurements in OSU-FPRC Reverberant Facility for a Pure Tone Source With Three Diffusers Operating.

20

CHAPTER IV

EXPERIMENTAL EVALUATION OF THE NOISE PRODUCED BY FLUID POWER PUMPS

- INTRODUCTION -

A major portion of the total effort in acoustics at the Fluid Power
Research Center has been directed toward measurement of the noise generat-
ed by fluid power pumps. All three types of noise (ABN, FBN, and SBN)
have been considered, with the greater advances being attained in the area
of ABN measurement. The experimental evaluation presented in this chap-
ter serves two purposes. The airborne noise data obtained during the
measurement of the survey pumps provides an indication of the rankorder-
ing capability of the airborne noise test procedure which is discussed in
Chapter II. The data compiled during the measurement of a spectrum of
fluid power pumps provides a basis for comparing the 5R714 pump group for
the military crawler tracter D7F(DV29) with the noise levels produced by
comparable fluid power pumps.

The 5R714 pump group which consists of one dual pump was subjected to
a series of tests that are outlined in Table 4-1. Each of the five num-
bered tests is a series of tests designed to provide information about the
pump group through out its operating range. All of the tests were per-
formed on the same pump group. The series of tests indicated by Tests 1,
2, 4, and 5 were conducted in the OSU-FPRC acoustics laboratory reverber-
ant facility. Test number 3 was carried out in accordance with OSU-P-7
(the latest version of the contaminant sensitivity test for fluid power
pumps).

TABLE 4-1

TEST SEQUENCE AND CODING FOR PUMP GROUP 5R714 FOR THE MILITARY D7F(DV29)

Test No.	Test Code OSU-NP-	Pump Group Configuration	Test Type	Load Device
1	21	As Received	ABN,FBN,SBN	Needle Valve
2	97	As Received	ABN,FBN,SBN	Relief Valve
3	21	As Received	Contamination	Needle Valve
4	98	After Contamination Test	ABN,FBN,SBN	Needle Valve
5	99	After Contamination Test	ABN,FBN,SBN	Relief Valve

21

- ACOUSTICAL EVALUATION OF MILITARY PUMP GROUP 5R714 AS RECEIVED -

The acoustical characteristics of the pump group (in its new condition) were determined by Tests 1 and 2. Airborne and fluid-borne noise measurements were obtained at each of the four sets of operating conditions shown in Table 4-2. Unless otherwise stated, the operating pressure of the pump group was the same for both pump outlets. Structure-borne measurements were made at 2080 RPM and 1875 PSI.

TABLE 4-2

TEST CONDITIONS FOR PUMP GROUP 5R714 ACOUSTICAL EVALUATION

Test Condition	Shaft Speed (RPM)	System Pressure (PSI)
1	2080	1875
2	2080	200
3	600	1875
4	600	60

The results of the Test Number 1 from Table 4-1 are shown in Figs. 4-1 and 4-2. The airborne noise levels are presented in Fig. 4-1, and the fluid-borne noise levels are contained in Fig. 4-2. It is evident from Fig. 4-1 that the airborne noise is more adversely dependent upon the shaft speed than system pressure. The same trend can be seen in the fluid-borne noise plot (Fig. 4-2). The fluid-borne noise level is significantly more dependent upon the shaft speed of the pump that on the operating pressure of the system. This trend has been observed to be true for all of the pumps tested thus far at the Fluid Power Research Center. A more thorough discussion of this phenomena will be presented later in this chapter.

- CONTAMINANT SENSITIVITY TEST OF MILITARY PUMP GROUP 5R714 -

After Tests 1 and 2 from Table 4-1 were completed, the 5R714 pump group was removed from the acoustical test facility and installed in the Fluid Power Research Center's pump contaminant sensitivity test stand. The results of the contaminant sensitivity test performed according to OSU-P-7 are shown in Table 4-3 and plotted in Fig. 4-3. A lengthy discussion of component contaminant testing will not be presented in this text; the subject is more than adequately covered in Ref. [3].

TABLE 4-3

CONTAMINANT TOLERANCE PROFILE OF PUMP GROUP 5R714 FOR 1000 HOUR LIFE

Size	No. > Size
200.00	2.6375E-02
160.00	5.1375E-02
120.00	1.2309E-01
100.00	2.0512E-01
80.00	3.7700E-01
70.00	5.3325E-01
60.00	8.0669E-01
50.00	1.5567E-00
40.00	3.7442E 00
30.00	1.1682E 01
20.00	5.5557E 01
15.00	1.5774E 02
10.00	6.5774E 02
5.00	4.1952E 03
4.00	7.0702E 03
3.00	1.2476E 04
2.00	2.3414E 04
1.00	3.7789E 04

- ACOUSTICAL EVALUATION OF MILITARY PUMP GROUP 5R714
AFTER CONTAMINANT TESTING -

The 5R714 pump group was installed in the reverberant test facility after completion of the contaminant testing, and a second series of acoustical tests were performed. The second series of tests was identical in every way to the tests performed on the pump group before contaminant testing. The results of those tests are plotted in Figs. 4-4 and 4-5. Fig. 4-4 contains the results of the airborne noise evaluation, while the fluid-borne noise data are plotted in Fig. 4-5.

Comparison of Figs. 4-1 and 4-4 indicates the airborne noise level of the pump group at the lowest horsepower test condition increased 15 dBA after contamination testing. The two intermediate horsepower points inverted with one increasing 5 dBA and the other decreasing 3 dBA. The maximum horsepower point was essentially unaffected by the degradation caused by contaminant testing.

Similar results are evident upon comparison of the fluid-borne noise data in Figs. 4-2 and 4-5. The low horsepower point increased 10 dBA, and

PUMP NOISE CHART
FLUID POWER RESEARCH CENTER
OKLAHOMA STATE UNIVERSITY
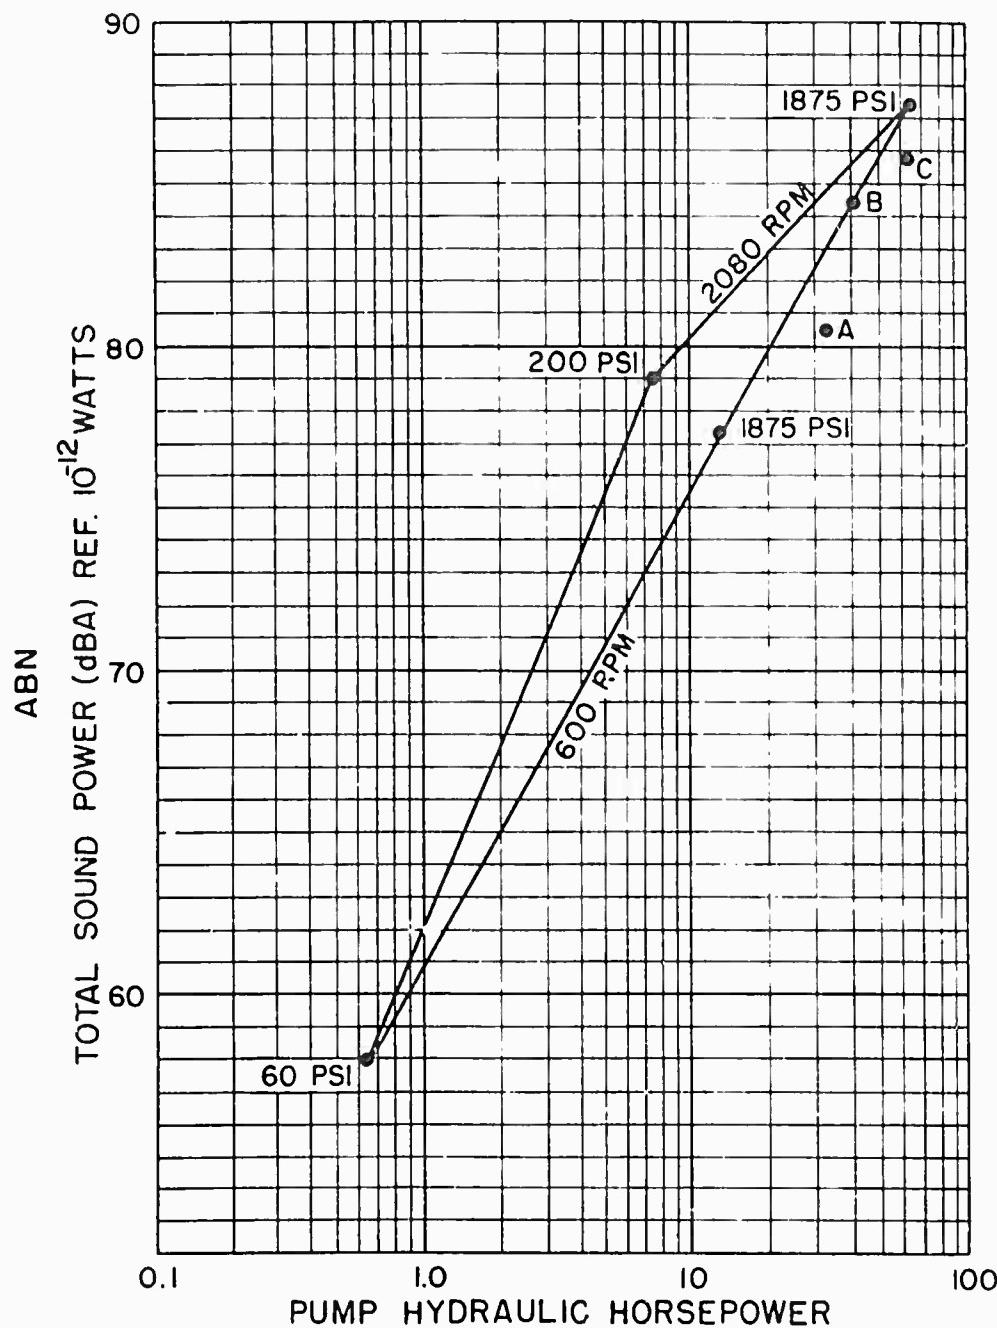
Fig. 4-1. ABN levels for pump group 5R714 for military D7F(DV29) tested as received. Pressures shown are the same for both pump outputs. Point (A) 2080 RPM, shaft side pump 200 PSI, end pump 1875 PSI; point (B) 2080 RPM, shaft side pump 1875 PSI, end pump 200 PSI; point (C) 2080 RPM, 1875 PSI with relief valve loading. All other points use needle valve load.

24

PUMP NOISE CHART
FLUID POWER RESEARCH CENTER
OKLAHOMA STATE UNIVERSITY
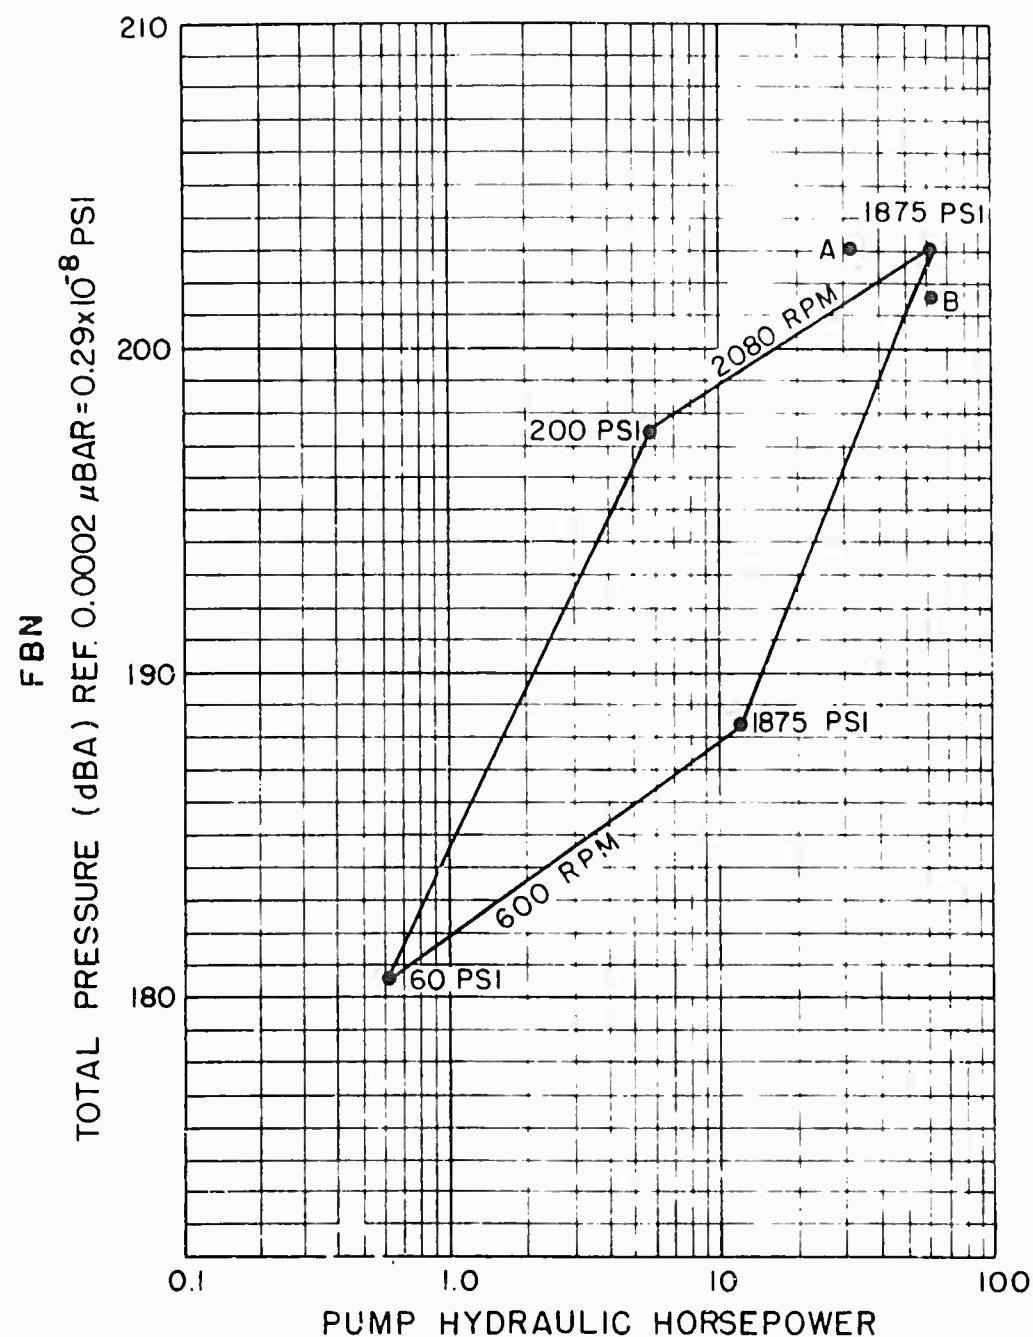
Fig. 4-2. FBN levels for pump group 5R714 tested as received. FBN measurements are for end pump of pump group. Pressures shown are the same for both pump outputs, Point (A), 2080 RPM, 1875 PSI, end pump, 200 PSI shaft pump. Point (B), 2080 RPM, 1875 PSI with relief valve loading. All other points use needle valve load.

25
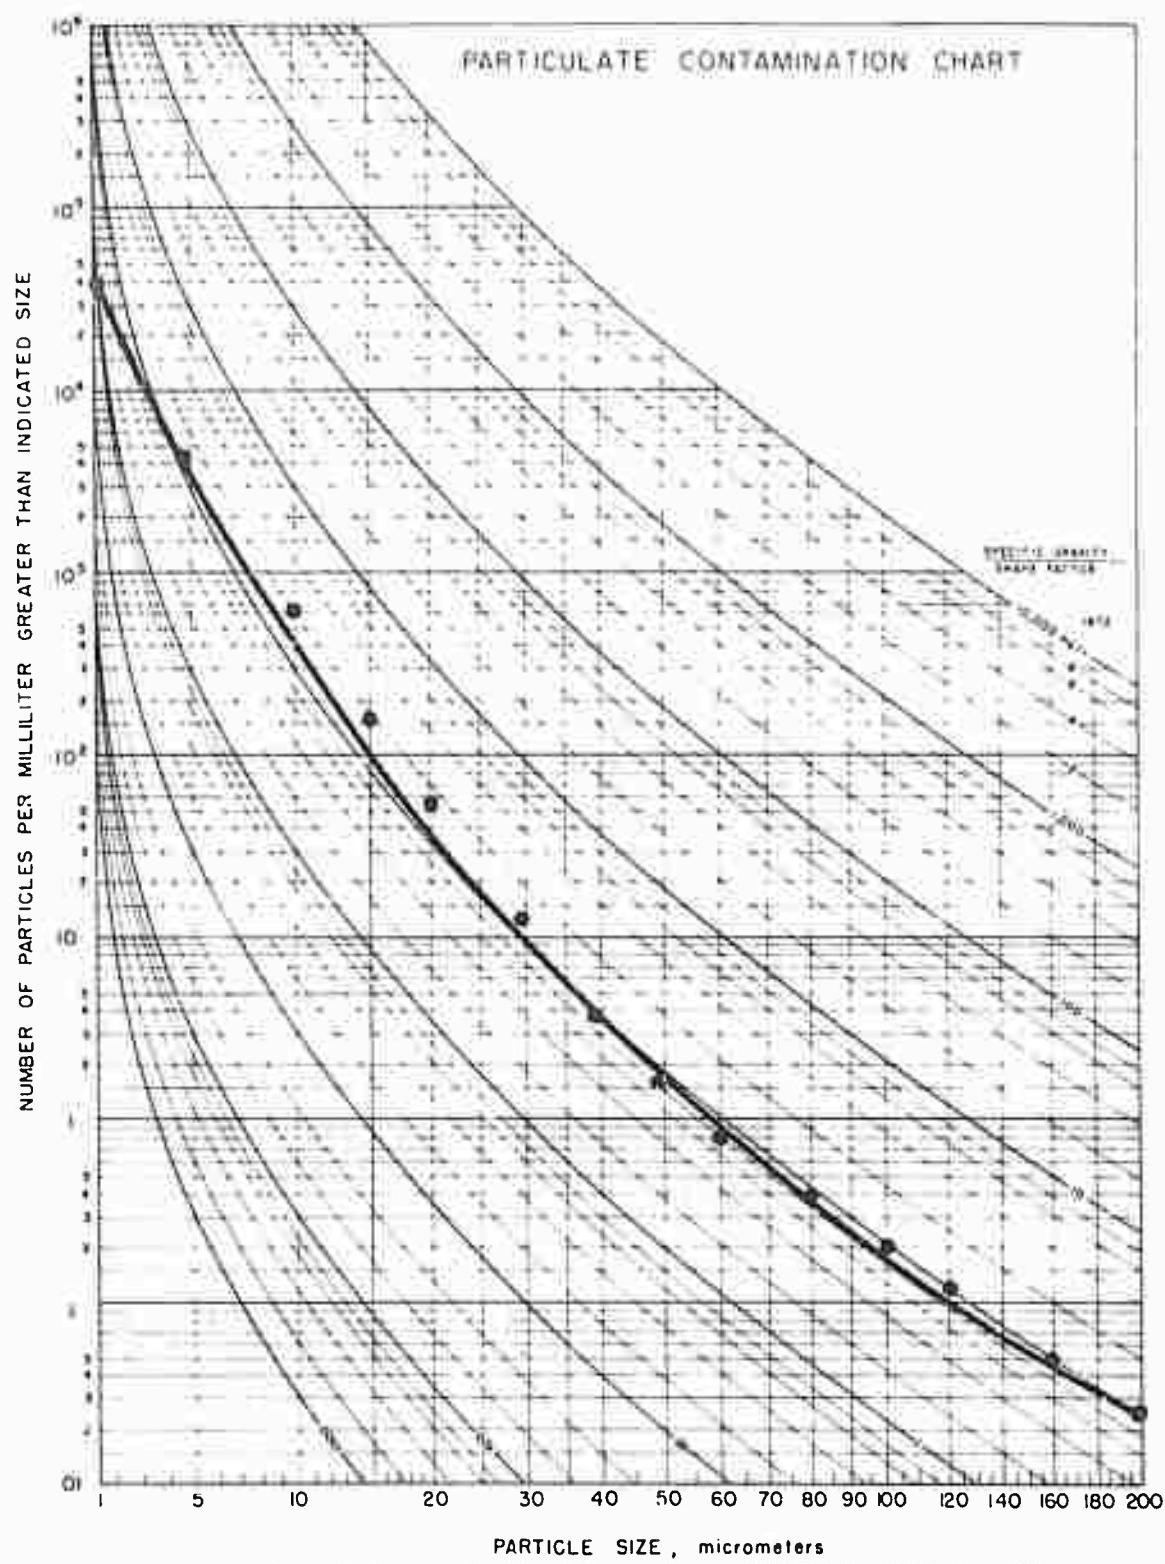
Fig. 4-3. Contaminant Tolerance Profile of Pump Group 5R714 for 1000 Hour Life.

PUMP NOISE CHART
FLUID POWER RESEARCH CENTER
OKLAHOMA STATE UNIVERSITY
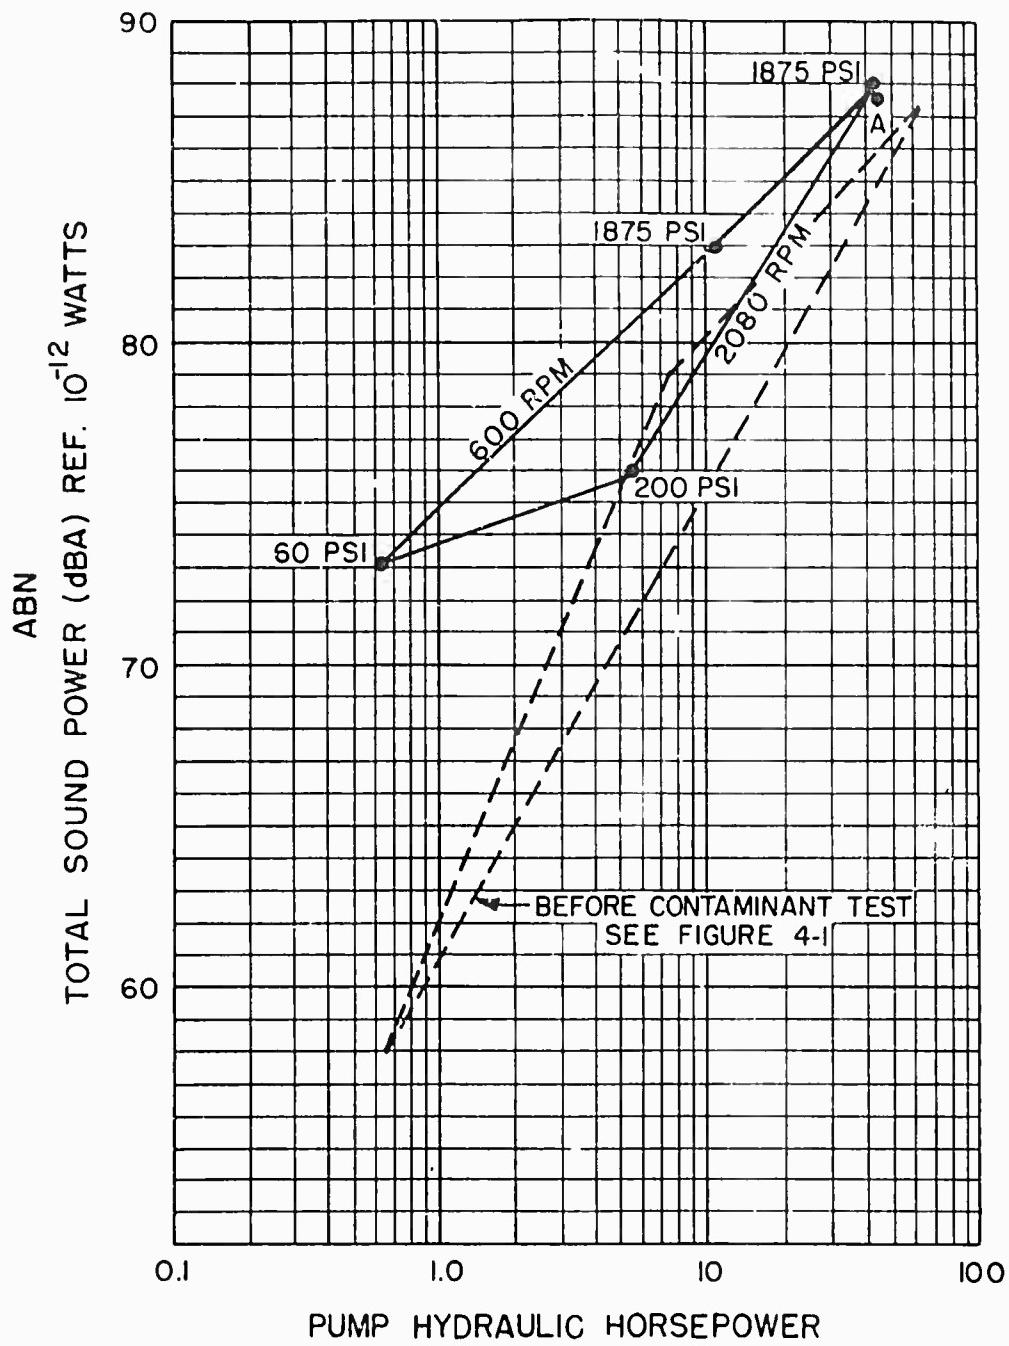
Fig. 4-4.   ABN levels for pump group 5R714 after contaminant test.
Pressures shown are the same for both pump outputs, Point
(A) 2080 RPM, 1875 PSI, with relief valve loading. All
other points use needle valve load.

27

PUMP NOISE CHART
FLUID POWER RESEARCH CENTER
OKLAHOMA STATE UNIVERSITY
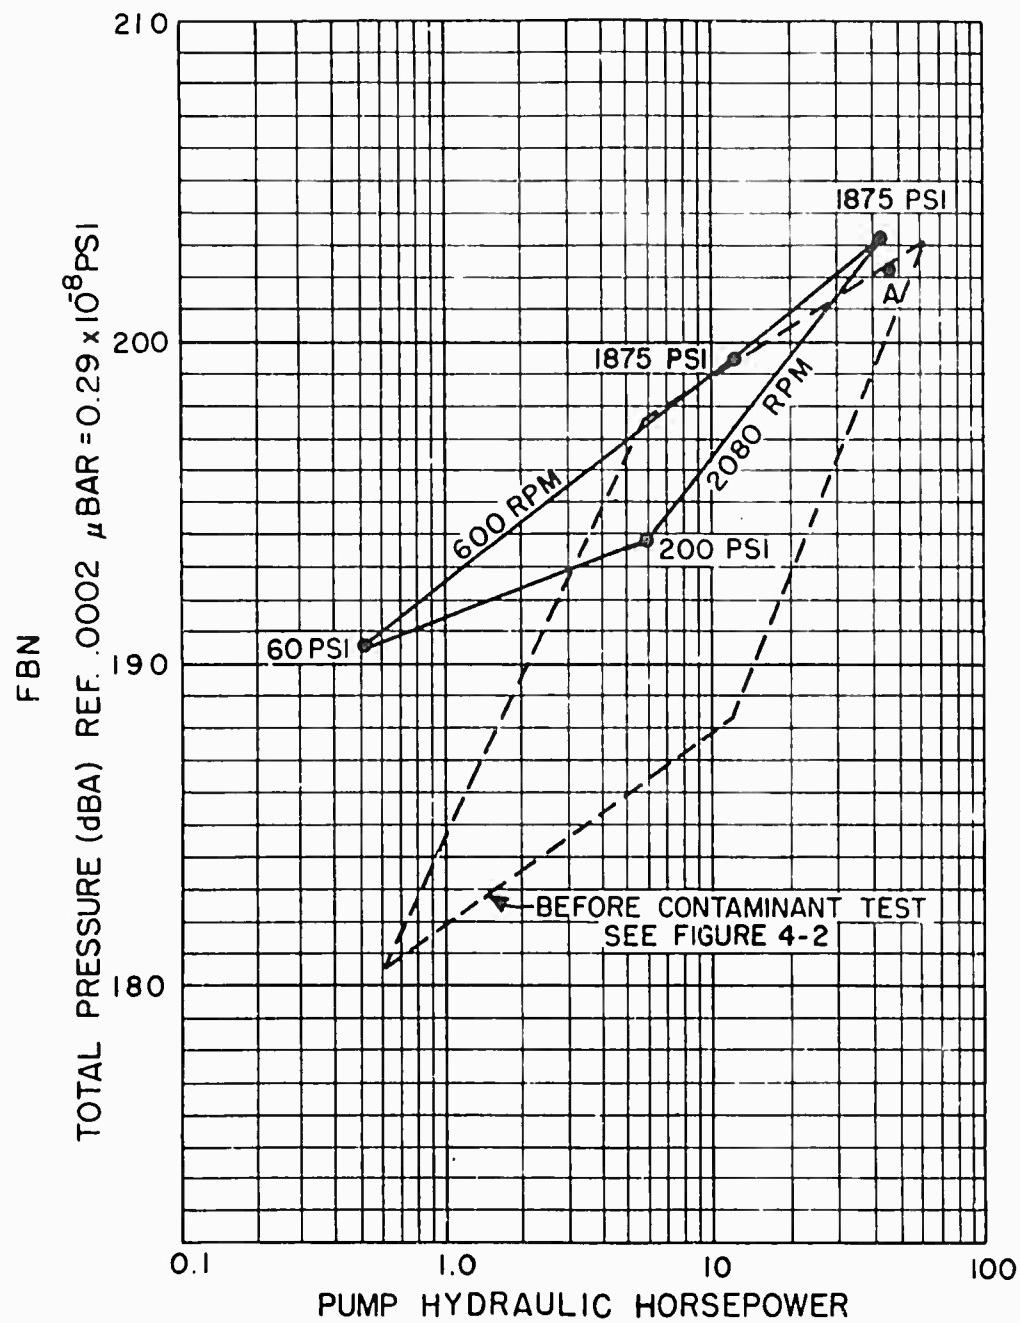
Fig. 4-5.   FBN levels for pump group 5R714 after contaminant test.
FBN measurements are for end pump of pump group. Pressures
shown are the same for both pump outputs Point (A) 2080 RPM,
1875 PSI with relief valve loading. All other points use
needle valve load.

28

the maximum horsepower condition remained unchanged. The two intermediate points alternately increased 11 dBA and decreased 3.5 dBA.

The data compiled during the examination of one pump or any small number of pumps does not provide sufficient information upon which broad generalities may be based. It is for this reason that a theory of cause and effect concerning the noise level changes before and after contamination testing of pump group 5R714 will not be presented to any extent other than to note that the changes were consistent in both direction and magnitude for fluid-borne and airborne noise.

- STRUCTURE-BORNE NOISE LEVELS FOR MILITARY PUMP GROUP 5R174 -

As discussed in Chapter II, the fluid power industry does not possess an acceptable procedure for the measurement of structure-borne noise (SBN). There are several reasons that preculde the development of an easily irplemented SBN measurement procedure. One of these reasons includes the number of measurements that must be taken to provide an accurate estimate of the vibration level of any surface. Due to the lack of an acceptable SBN test procedure and the difficulties involved with the development of such a procedure, very little structure-borne noise data have been accumulated at the Fluid Power Research Center. The data presented in Table 4-4 were obtained by placing the measurement transducer (magnetically held accelerometer) at the same position on the pump for each test condition. The reference vlues for computation of decibel structure-borne noise levels are shown at the bottom of Table 4-4.

- ACOUSTICAL COMPARISON OF PUMP GROUP 5R714
WITH A SURVEY OF FLUID POWER PUMPS -

One of the major objectives of the acoustical evaluation program for 1973 has been the comparison of the acoustical characteristics of military pump group 5R714 with a survey of the acoustical characteristics of current production fluid power pumps. The greatest difficulty encountered throughout the program is that of determining a meaningful basis of comparison. If pumps are compared on total sound power alone, only the directly radiated airborne noise is considered during the comparison. It is conceivable that a very quiet pump, with respect to the directly radiated energy, could possess a very high fluid-borne noise level. The high fluid-borne noise level would produce high fluid power system noise levels, which could not be predicted from the airborne noise radiated from the pump. It should be pointed out that a pump that has a high airborne noise level generally has a high fluid-borne noise level, see Fig. 4-6. Therefore, fluid power pumps cannot be compared by any one measurement to determine which pump is best to minimize noise in a given fluid power system.

29

TABLE 4-4

SBN LEVELS FOR PUMP GROUP 5R714

Configuration	Location	Total Levels (dBA)		
		Acc	Vel	Dis
New N.V. Load	Right Side	131.8	122.1	124.4
	Rear	135.4	126.5	133.1
	Rear Mounting Flange	136.9	127.9	131.2
	Right Side	132.8	125.5	131.1
New R.V. Load	Right Side	132.0	122.3	125.3
Worn* N.X. Load	Rear	134.0	126.2	133.0
	Right Side Mounting Flange	132.4	124.8	133.4
	Right Side	133.8	126.5	134.3
Worn* R.V. Load	Right Side	134.7	130.7	140.2
	Rear	132.5	127.4	136.6

REFERENCE LEVELS	10^{-5} m/S^2 10^{-8} m/S 10^{-11} m

All vibration levels measured at 2080 RPM, 1875 PSI.

*After contamination testing.

If it is desired to provide a comparison that will indicate which of two pumps will minimize the sound level of a given fluid power system, all of the acoustical noise levels(ABN, FBN, SBN) must be measured for the components to be compared. As mentioned previously, structure-borne noise levels were not measured at all for the survey pumps due to the

lack of an acceptable measurement procedure. Hence, only the airborne and fluid-borne noise levels will be compared in this report.

The airborne noise data taken on military pump group 5R714 before contamination testing and with needle valve loading is compared with the

30
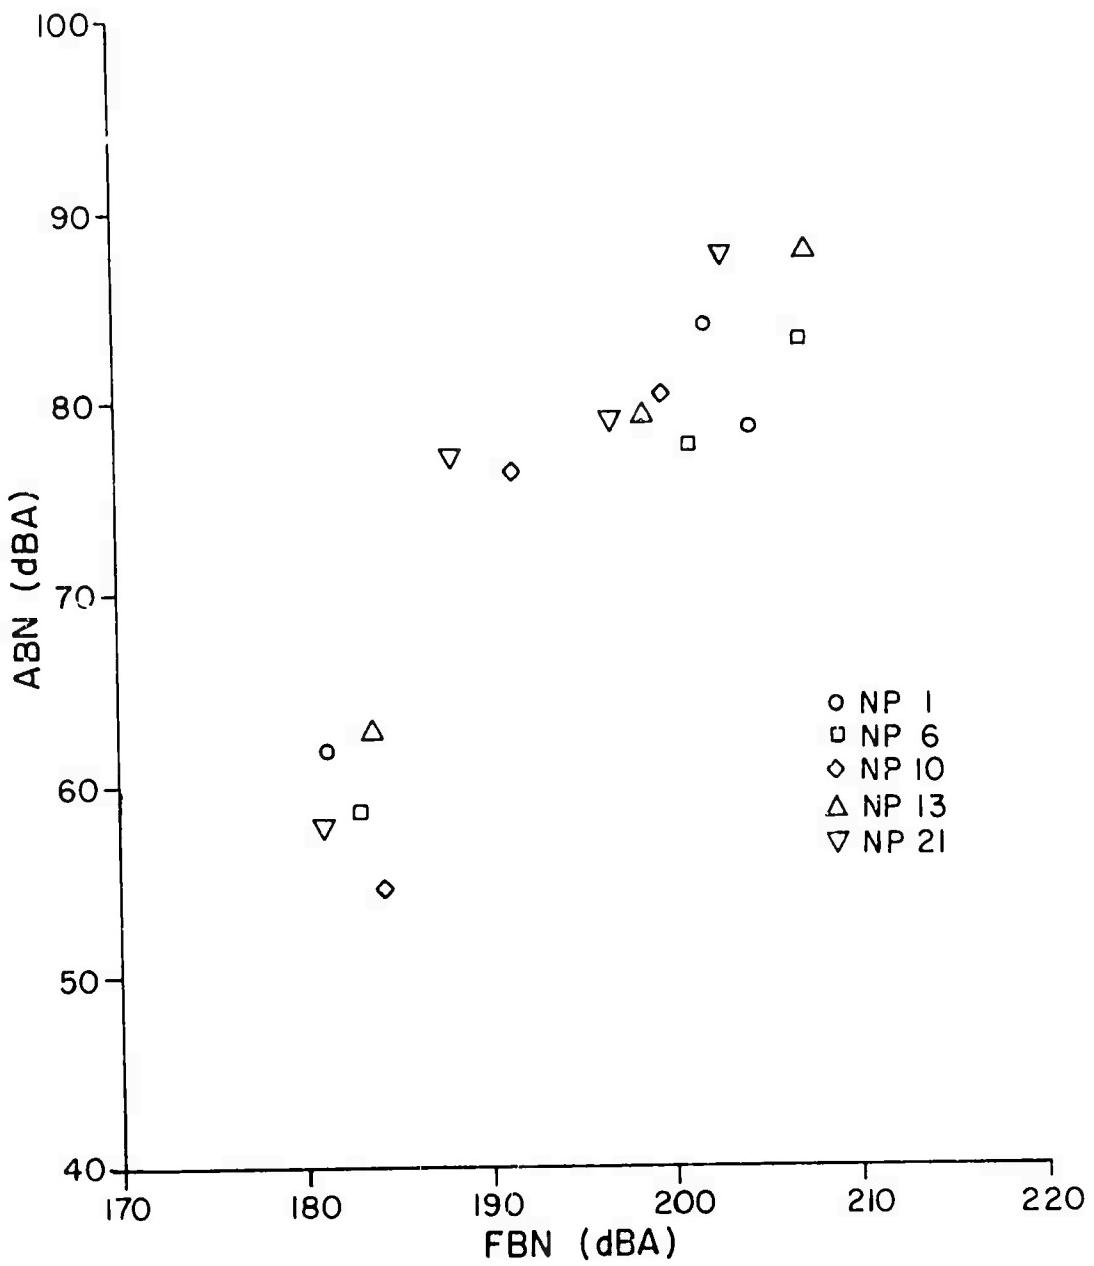
Fig. 4-6. ABN Versus FBN for Pump Group 5R714 (NP-21) and Four Survey Pumps.

31

data obtained from a survey of the airborne noise levels of fluid power pumps in Fig. 4-7. The pump survey data is presented in the form of histograms for each test condition. The noise level of pump group 5R714 is marked by (21) on the abscissa for each test condition. For the comparison shown in Fig. 4-7, pump group 5R714 appears to be slightly higher in directly radiated sound than the mean of the pumps in the survey. It should be noted that the flow rate, hence the output horsepower, is considerably higher for pump group 5R714 than the mean horsepower of the survey pumps. Recognizing this fact, a plot of total sound power (dBA) per horsepower would rate pump group 5R714 below the mean (dBA/HP) for the survey pumps. Fig. 4-8 contains histograms of (dBA/HP) for the survey pumps with the (dBA/HP) level for pump group 5R714 marked on the abscissa by (21).

The same type of plots are presented for fluid-borne noise in Figs. 4-9 and 4-10. The fluid-borne noise (FBN) and the FBN/HP level of pump group 5R714 is slightly below the mean fluid-borne noise level and mean FBN/HP for the survey pumps. Again, the comparison of both noise level and noise level per horsepower are necessary to adequately rate the pump.

A third method of comparison contrasts the slopes of the sound power versus horsepower graph shown in Fig. 4-1 with the mean of the slopes generated by the survey pumps. The mean slopes of the survey pumps are represented by Eqs. 4-1 and 4-2:

$$\Delta SPL = 2.0 \, \log_{10} \, (\Delta P) \qquad\qquad (4-1)$$

$$\Delta SPL = 4.2 \, \log_{10} \, (\Delta N) \qquad\qquad (4-2)$$

ΔP = change in pump output pressure
ΔN = change in pump shaft speed
ΔSPL = change in sound power level

In contrast, the same type of equations for pump group 5R714 are:

$$\Delta SPL = 4.25 \, \log_{10} \, (\Delta P)$$

$$\Delta SPL = 4.75 \, \log_{10} \, (\Delta N)$$

It is evident from the coefficient of the log term that the sound pressure level of pump group 5R714 decreases more rapidly with decreasing horsepower than the average of the survey pumps.

The overall survey results are presented in Table 4-5.
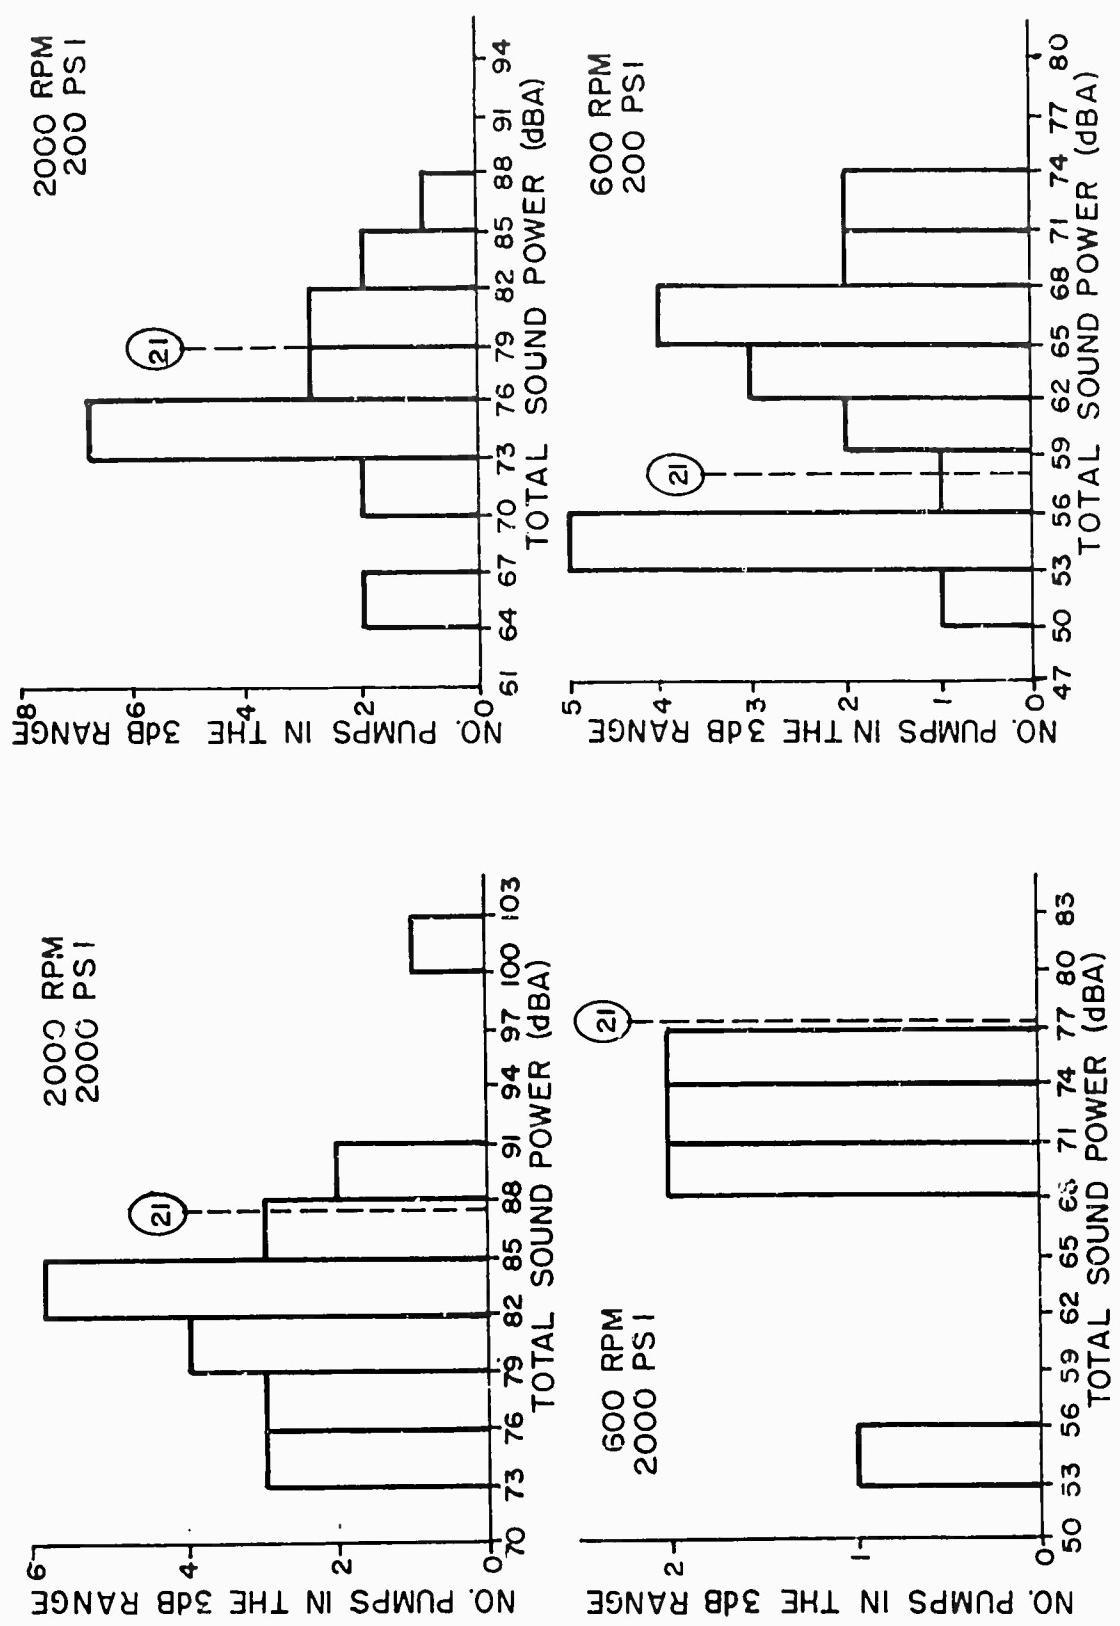
Fig. 4-7. Histograms of Total Sound Power for Survey Pumps with Sound Power Level for Pump Group 5R714 Shown By (21).

33
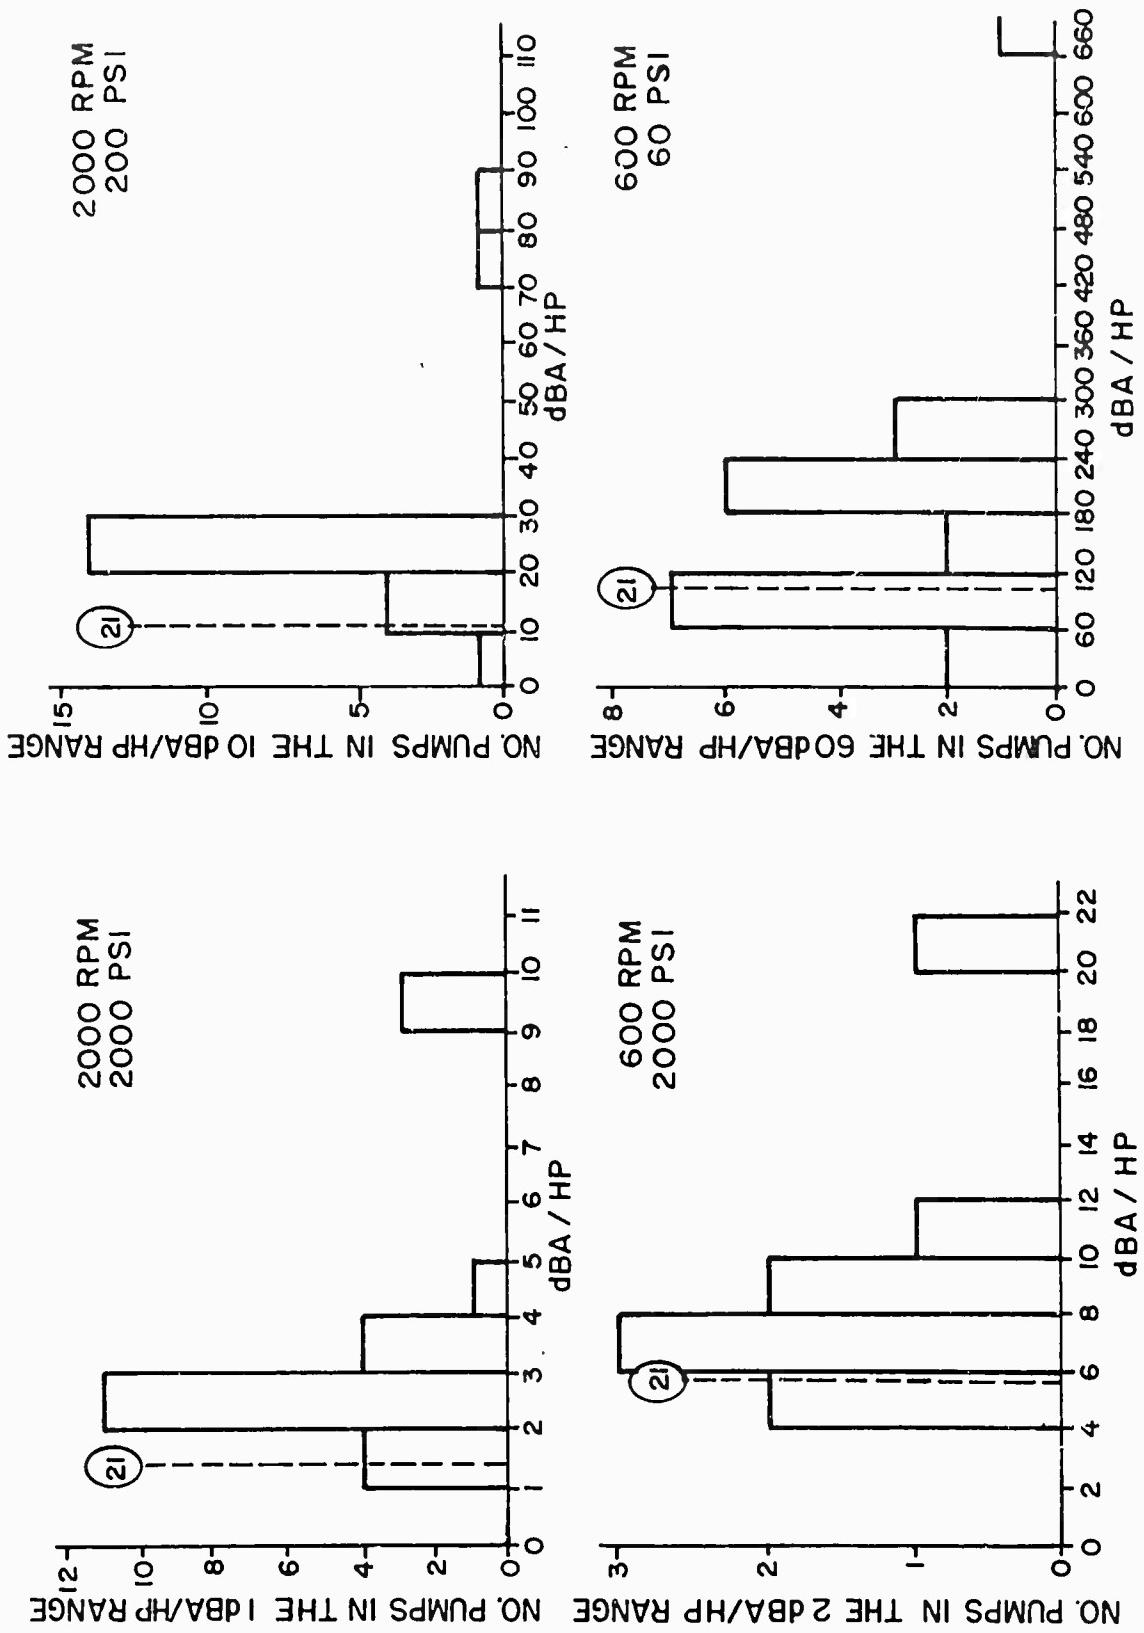
Fig. 4-8 Histograms of dBA/Horsepower for Survey Pumps with dBA/H.P. for Pump Group 5R714 Shown By (21).

34
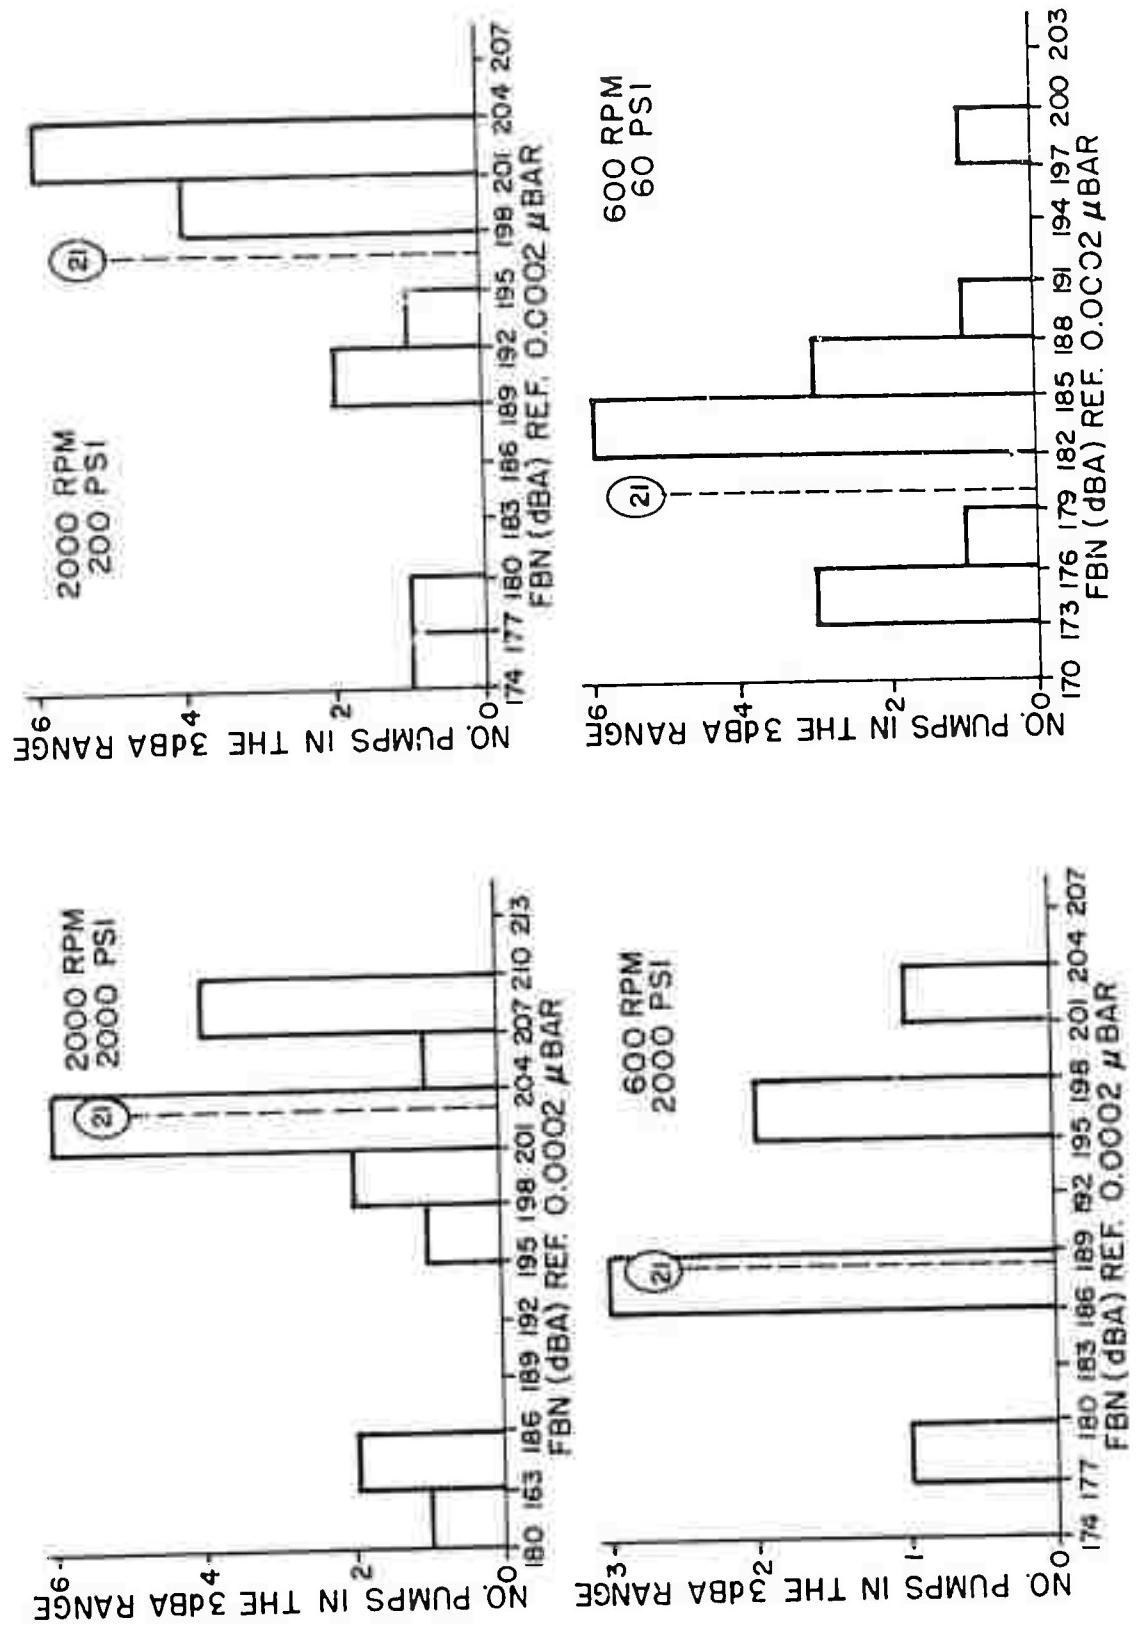
Fig. 4-9. Histograms of FBN for Survey Pumps With FBN Level for Pump Group 5R714 Shown By (21).
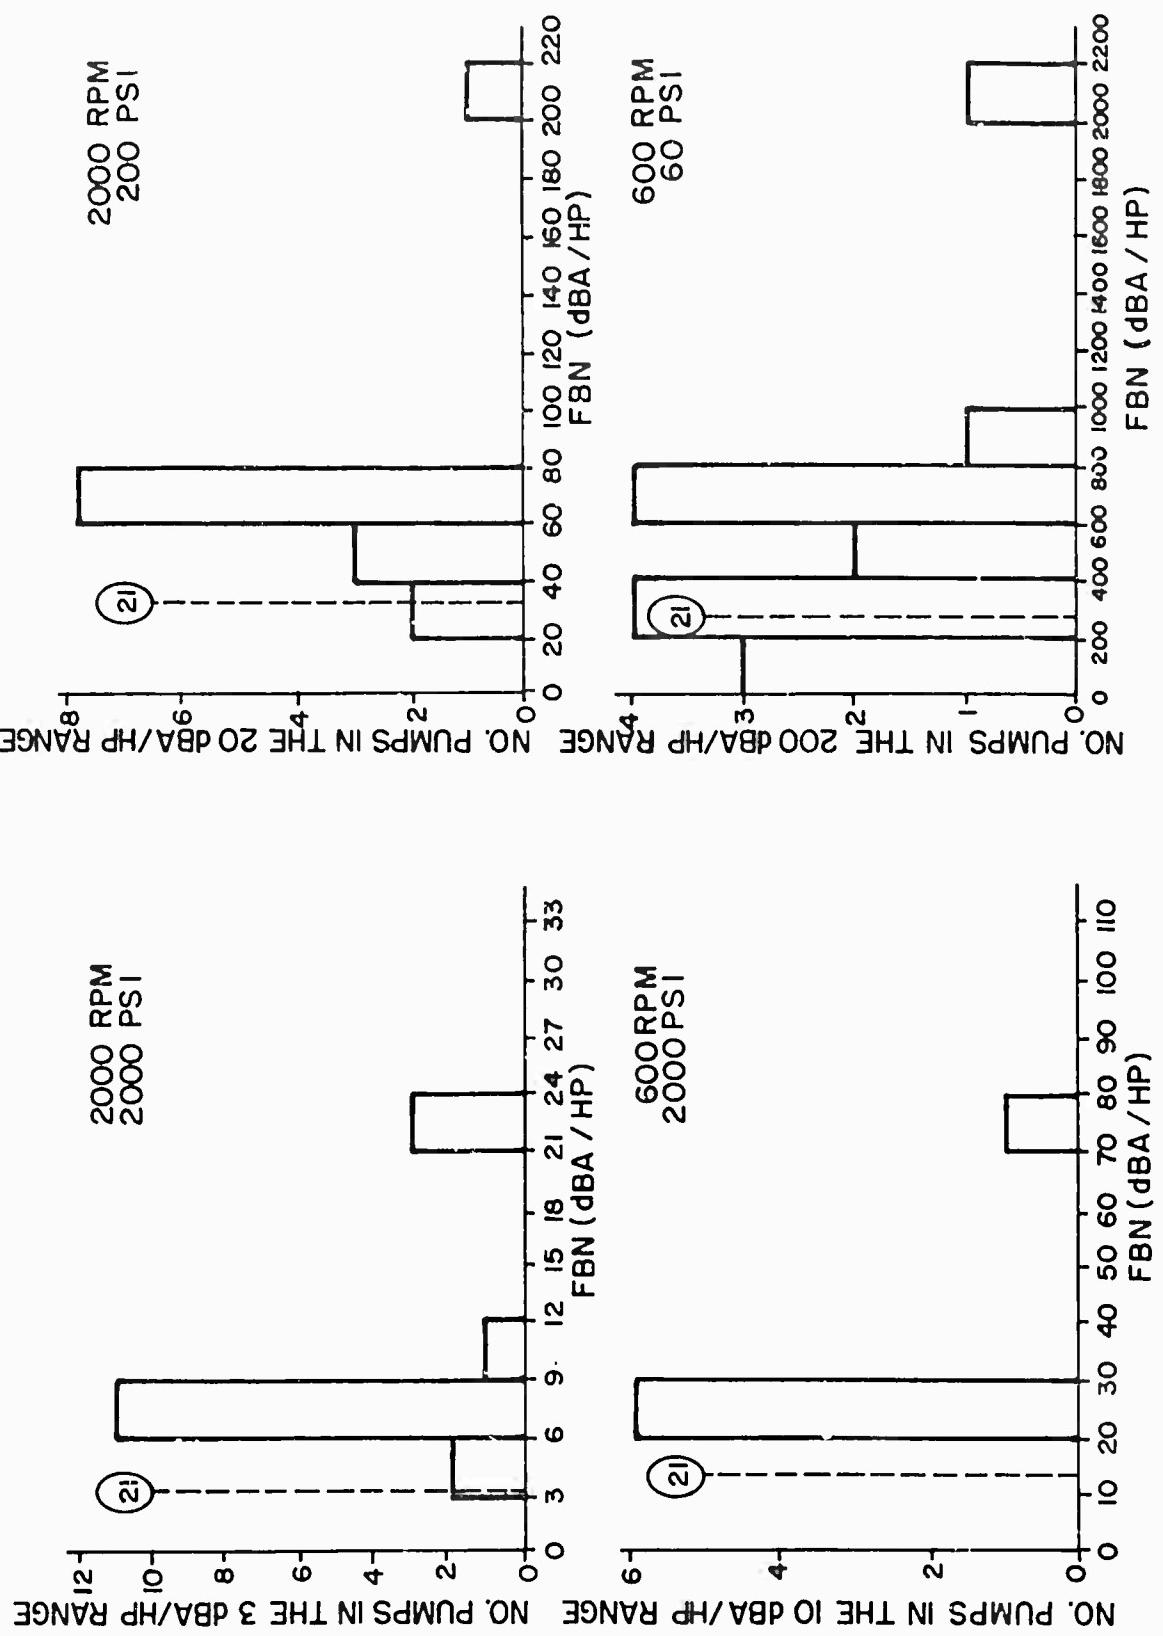
Fig. 4-10. Histograms of FBN/Horsepower for Survey Pumps with FBN Level for Pump Group 5R714 Shown by (21).

36

TABLE 4-5: Results of an Acoustical Survey of Fluid Power Pumps.

37

CHAPTER V

CONDUIT EVALUATION

Prediction of fluid power system sound levels is dependent upon the accuracy with which one can estimate the sound level of the components that make up the system. Systems consist of both active and passive components with respect to acoustic energy generation. Fluid power pumps and valves can be considered active acoustic components because they usually generate noise. Reservoirs and conduits are usually passive acoustic components because they do not normally generate noise as a by-product of their normal function within the system. Passive components must be forced by some form of energy transmission to produce noise. This chapter considers the airborne noise produced by two types of fluid power conduit for a known fluid-borne noise forcing function. The conduits used during this evaluation were supplied by Caterpillar Tractor Co. and are hose assemblies from the military D7F(DV29). Two 54" hose assemblies connected together were used during the experimental phase of this portion of the program. Two diameters of hose (1" = #1 and 3/4" = #2) were tested.

The fluid-borne noise level was measured at three positions in the conduit. The use of three transducer positions allows the computation of the maximum dynamic pressure level in the conduit by using Eq. (5-1):

$$Lx = 10 \log_{10}(10^{L_1/10}+10^{L_3/10} - 2 \cos 2K\delta 10^{L_2/10}) + \log_{10} \frac{1}{1-\cos 2K\delta} \quad (5-1)$$

Where:

K = frequency/phase velocity

L_1= measured level at conduit inlet

L_2= measured level at conduit midsection

L_3= measured level at conduit outlet

δ= distance between measurement positions

By measuring the ABN, FBN, and SBN of each conduit for a particular set of operating conditions, the investigators were able to derive transfer functions that allow the accurate prediction of ABN for a known FBN level. A detailed discussion of the techniques used to derive the transfer functions will not be presented in this text but may be found in Ref. [4]. What is of more direct interest at this time is the overall sound output that may be expected from a given length of conduit. The overall results of the experimental evaluation are shown in Table 5-1. It should be noted that the only source of sound in the measurement environment was

TABLE 5-1: TOTAL NOISE LEVELS (dB) OF HYDRAULIC CONDUIT

Pump #	Hose #	Pressure psi	N RPM	Impedance	FBN $\dot{P}$	SBN v	ABN A weighted	ABN
22	1	2000	2000	N.V.	123.5	129.5	74.7	75.5
22	1	1000	2000	N.V.	123.3	132.8	83.4	83.1
22	1	2000	1000	N.V.	111.8	129.2	64.1	67.5
22	1	2000	2000	R.V.	121.4	131.3	78.0	77.8
22	1	2000	2000	N.V.	113.8	126.9	57.3	62.9
6	2	2000	2000	N.V.	116.0	116.5	64.4	70.6
6	2	1000	2000	N.V.	114.5	120.5	71.3	71.8
6	2	2000	1000	N.V.	115.5	121.2	70.2	72.2
6	2	2000	2000	R.V.	117.7	125.1	75.5	76.9

Pump #22 - 9.1 in^3/rev

Pump #6 - 4.04 in^3/rev

Type = 4 Ply Spiral Wrapped
Operating Pressure (O.P.) of 3/4" = 3000 psi
Operating Pressure (O.P.) of 1" = 4000 psi
Minimum Burst Pressure for both 3/4" and 1" Hoses = 4 x)O.P.)

Hose - 1 -- Rubber covered Hose Specifications Wire Braid, 1" I.D.

Hose - 2 -- Rubber covered Hose Specifications Wire Braid, 3/4" I.D.

the conduit.

A diagram of the test facility is shown in Fig. 5-1. The pressure transducer locations are numbered in the diagram.

- TRANSFER FUNCTIONS -

Two types of transfer function were developed for each conduit tested. The two methods relate the fluid-borne noise to the resultant airborne noise in different ways. The transfer function, G_1, relates fluid-borne noise directly to airborne noise as shown in Fig. 5-2a. Surprisingly accurate results were obtained from this rather simple model. The second technique involves the transformation of energy from fluid-borne to structure-borne and finally to airborne noise as shown in Fig. 5-2b. The transfer functions for both conduits are presented in Reference [4]. A comparison of the predicted and measured sound levels for each test condition is shown in Table 5-2.

ABN levels between 70 and 80 dB were found to be produced by 8 feet of flexible hydraulic conduit. Comparison of these levels to ABN levels produced by hydraulic pumps and motors indicated that the hydraulic conduit does contribute a significant amount of ABN.

Average pressure, pump speed, and downstream impedance were found to have significant influence on the ABN output of a hydraulic conduit. A reduction of the average operating pressure from 2000 to 1000 psi caused a substantial increase in both SBN and ABN total levels. Reduction of pump speed shifts the FBN profile toward lower frequencies resulting in a large increase of SBN amplitudes in the low-frequency range. A relief valve was found to increase the total ABN level of the conduits tested 3 to 6 dB above the levels produced by a needle valve.

The transformation of FBN into SBN by the hydraulic conduits investigated can be described as dynamic system which exhibits relatively high sensitivity to low-frequency FBN. The transformation of SBN into ABN can be basically described as a system with relative high sensitivity to high-frequency SBN.

This investigation establishes substantial evidence that correlations describing the relationship between FBN, SBN, and ABN can be developed. Models based on total dB levels provide the best overall effectiveness in predicting total ABN levels for both conduits tested. Only the one inch conduit was considered to be effectively described by models developed fom frequency analysis techniques. Even though models developed from frequency analysis did not adequately describe Conduit #2, it is thought that digital models describing the complete transformation of FBN into ABN in two separate steps has the greatest potential for accurate prediction of ABN levels. A more complete discussion of this topic can be found in Reference [4].

41
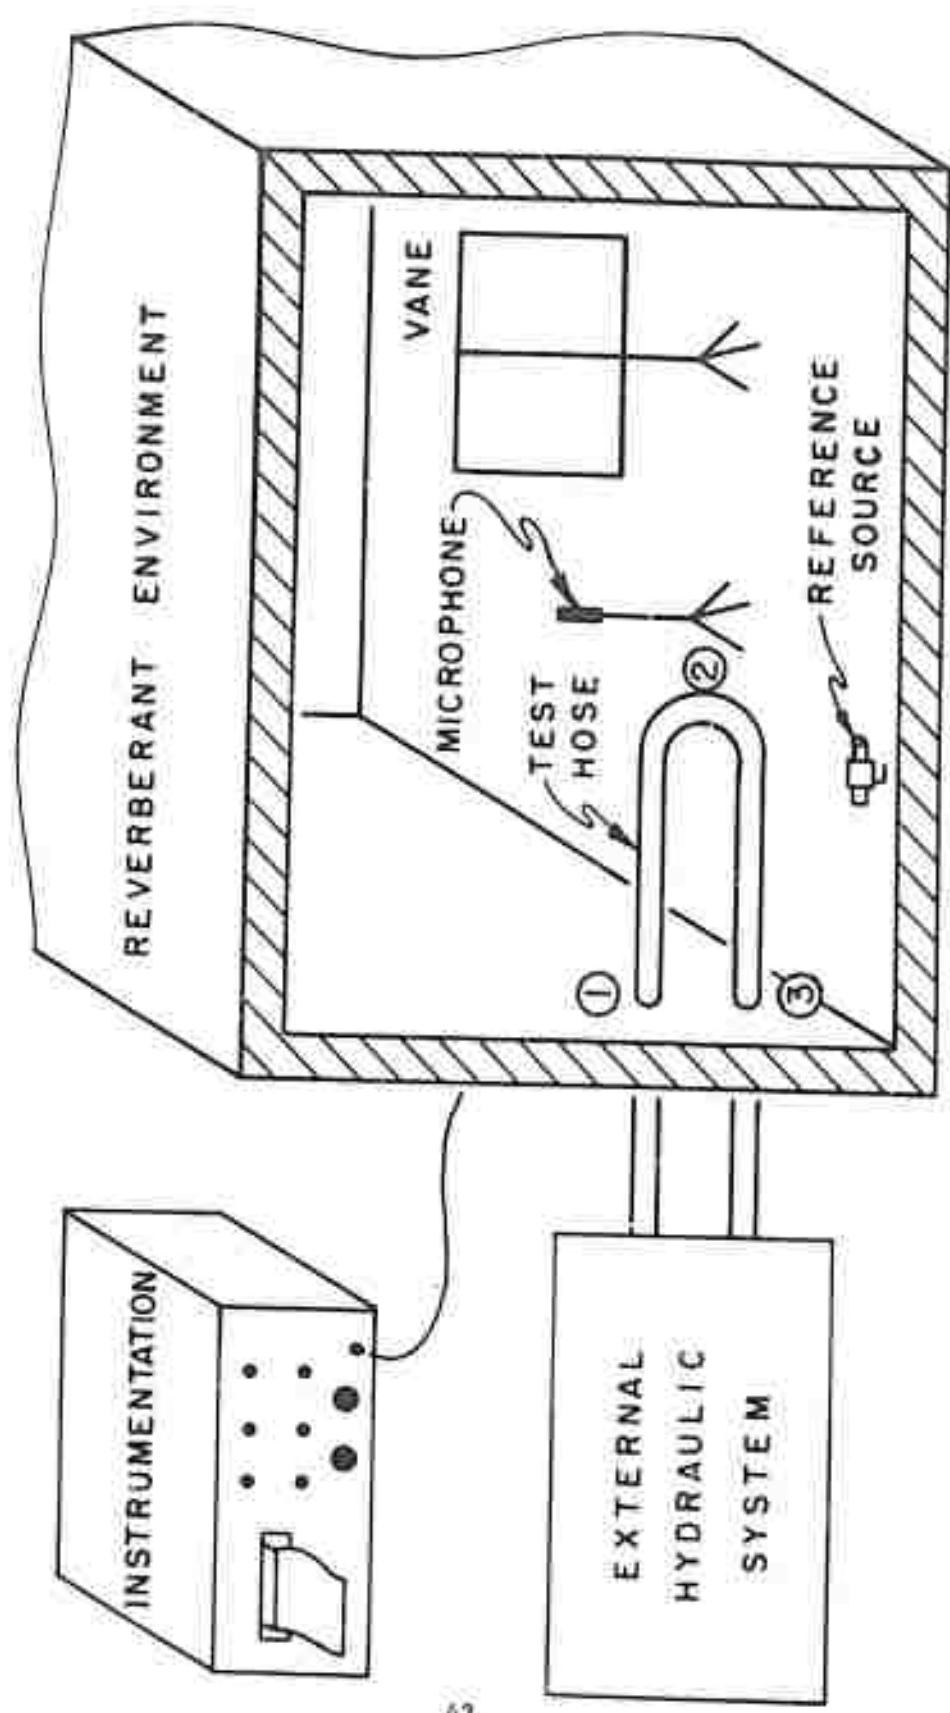
Fig. 5-1. Test Facility With Conduit Evaluation Equipment Installed.

42
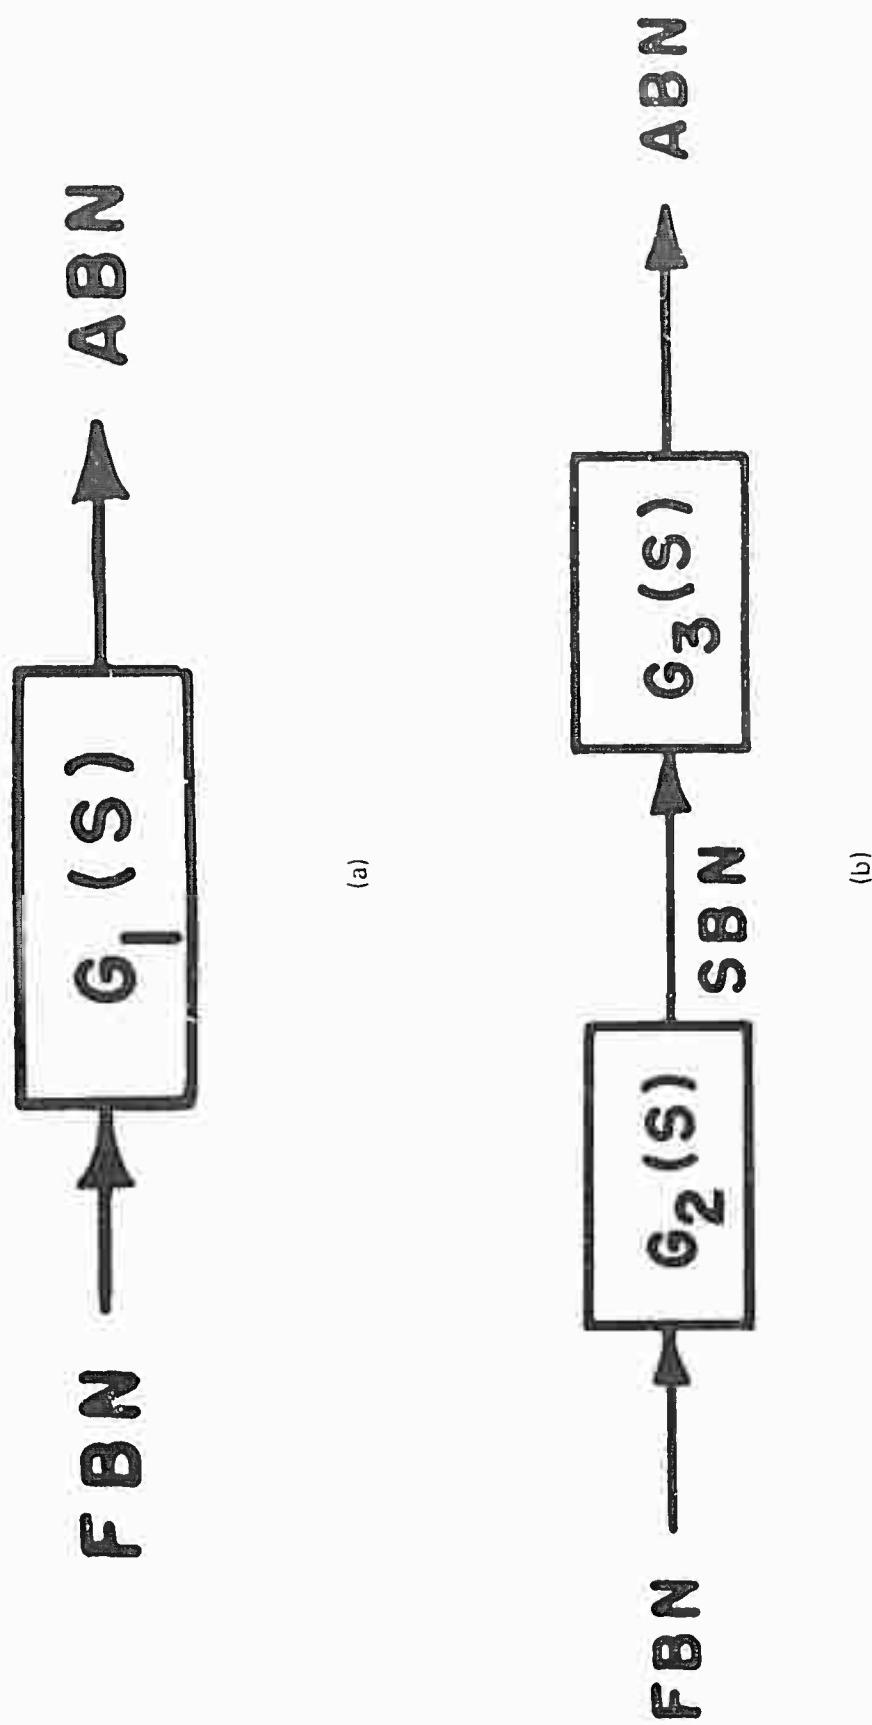
Fig. 5-2. Two Types of Transfer Functions Developed for Fluid Power Conduits.

43

TABLE 5-2: COMPARISON OF MEASURED AND PREDICTED LEVELS FROM FREQUENCY ANALYSIS

| Test Conditions | | | | | Measured | | Airborne Noise Digital Model | | | |
| | | | | | | | $G_1(s)$ | | $G_2(s) \cdot G_3(s)$ | |
Hose #	Pump #	P psi	S rpm	IMP	dB	dBA	dB	dBA	dB	dBA
1	22	2000	2000	NV	75.5	74.7	77.5	77.7	78.0	76.5
1	22	2000	1000	NV	67.6	64.1	69.8	68.4	70.1	66.5
1	22	1000	2000	NV	83.1	83.4	81.0	81.2	81.5	81.3
1	22	2000	2000	RV	76.9	75.5	74.5	73.6	75.1	74.0
1	6	2000	2000	NV	72.2	70.2	69.5	67.7	70.4	67.9
2	6	2000	2000	NV	70.6	64.4	64.5	60.2	65.3	60.3
2	6	2000	1000	NV	62.9	57.3	65.1	60.5	64.6	59.2
2	6	2000	2000	RV	73.7	72.4	65.2	60.7	65.3	61.0

P - Pressure   S - Speed   NV - Needle Valve   RV - Relief Valve

44

CHAPTER VI

ACOUSTICAL MEASUREMENTS OF RELIEF VALVES

- INTRODUCTION -

Very little literature is available regarding relief valve noise.
Relief valve noise has become more important because of governmental
regulations on noise pollution and the concern for employee environment.
This chapter presents a summary of relief valve noise tests conducted
at the OSU-FPRC acoustics laboratory and provides guidelines for future
tests.

The noise from relief valves originates primarily in three domains:
fluid-borne noise, structure-borne noise, and airborne noise [5]. The
measurement of structure-borne noise is a problem because many points
over the surface of the valve must be measured to provide an accurate
estimate of the level of the valve surface. The difficulties involved
with SBN measurement preclude the luxury of a great deal of SBN data in
this report. Fluid-borne noise is easily measured with a piezoelectric
transducer. The measurements presented in this chapter were made on the
high-pressure side of the relief valve. Fluid-borne noise in relief
valves is the result of turbulence, cavitation, and interaction with other
components. The directly radiated airborne noise was measured in the
OSU-FPRC reverberant facility in accordance with the ABN measurement
procedure presented in Appendix F.

- TESTS AT THE OSU-FPRC ACOUSTICS LABORATORY -

The relief valve testing at the OSU-FPRC laboratory included two
pilot operated relief valves. Both were identical in functional design
and specifications. Relief Valve #2 (RV2) is built into a manifold for
bolting directly to a hydraulic system. RV2 is the military version
(5R717) of relief valve group 6J1746 supplied by Caterpillar. It is con-
siderably larger physically than RV1, which was ported for standard
hydraulic conduits. Both valves were connected to the controlling
system using flexible hydraulic conduit, which was wrapped with 2" foam
rubber. The line was then covered completely with a layer of leaded
vinyl material, overlapped, and sealed with duct tape. All connecting
lines were treated this way to attenuate as much system noise as possible
for a more accurate noise measurement from the relief valve.

The testing was conducted in the OSU-FPRC sound reverberation room.
This room is equipped with rotating plane diffusers and is certified

45

according to ISO recommended procedures [6,7].

All data (ABN, FBN, SBN) was acquired through the use of a third-octave analyzer, which average the input signal at 1/3 octave center frequencies between 100 and 10,000 Hz. All of the output data were corrected and put into usable form with a computer program designed for this purpose. (See Appendix E)

Both valves were tested under a constant pressure of 2000 psi and 65.5°C. RV1 was tested only at 20 gpm flow rate because, when higher rates were applied, it had high internal leakage. RV2 was tested at flow rates of 20, 40, and 60 gpm. The noise levels are tabulated in Table 6-1 with corresponding horsepower levels at each flow rate. RV2 shows a critical flow rate at about 40 gpm, where the ABN begins to increase noticeably. At about 60 gpm, a chatter developed within the valve. The flow rate was increased momentarily, and the valve was found to chatter at higher flow rates. The rated flow for this valve was 80 gpm, which was much higher than the flow at the onset of chattering. Fig. 6-1 shows the approximate relationship between airborne noise and horsepower. The almost vertical trend emphasizes how critical the flow rate is for the valve tested.

A comparison of the fluid-borne noise output with the airborne noise output reveals an increase in airborne noise with an increase of fluid-borne noise. This is shown graphically versus flow rate in Fig. 6-2. Typical spectrums for relief valve and pump noise are shown in Fig. 6-3. The relief valve emits predominently high frequency noise caused by flow and the pump is a low frequency source. In Fig. 6-4, the fluid-borne noise appears to increase as the logarithm of horsepower.

It would seem that the structure-borne noise would also increase as the fluid-borne and airborne noise increases. The structure-borne noise output is tabulated in Table 6-1 and decreases with an increase in flow rate. This is illustrated graphically in Fig. 6-5. Note that the structure-borne noise measurement was taken at only one point on the relief valve surface, and the point tested may have been in a nodal region.

The pressure-flow characteristics for RV1 are shown in Fig. 6-6. Data is presented for both increasing and decreasing flow rates. The data was obtained in FPRC systems laboratory.

- FUTURE TESTING -

The main objectives of any testing program should include accuracy and repeatability. The facility in which a relief valve is tested for airborne noise should be certified for acoustical testing according to accepted procedures. For an accurate measurement of the sound power output of a valve all other noise-producing apparatus should be covered with acoustical attenuating material.

46

The recommended frequency range at which measurements should be made is between 100 and 10,000 Hz. This should include all relevant noise data for the relief valve and has been accepted by the NFPA for other acoustical testing procedures.

All relief valves should be tested at their specified working pressure and flow rates relevant to actual use up to the rated flow. As is evident from the data given, there is always the possibility of instability before reaching rated flow.

TABLE 6-1: SOUND POWER RESULTS OF RELIEF VALVES

AIRBORNE SOUND POWER

Valve	Pressure (psi)	Flow (gpm)	Horsepower	dBA
1	2000	20.0	23.3	84.2
2	2000	20.0	23.3	81.9
2	2000	40.0	46.7	79.4
2	2400	60.0	84.0	91.8

FLUID-BORNE NOISE LEVELS

Valve	Pressure (psi)	Flow (gpm)	Horsepower	dBA
1	2000	20.0	23.3	240.8
1	2000	30.8	35.9	235.0
2	2000	20.0	23.3	229.9
2	2000	40.0	46.7	234.7
2	2000	60.0	70.0	240.6

STRUCTURE-BORNE NOISE LEVELS

Valve	Pressure (psi)	Flow (gpm)	Horsepower	dBA
1	2000	20.0	23.3	135.2
2	2000	20.0	23.3	123.5
2	2000	40.0	46.7	124.9
2	2000	60.0	70.0	114.8

VALVE NOISE CHART
FLUID POWER RESEARCH CENTER
OKLAHOMA STATE UNIVERSITY

Fig. 6-I. Airborne Noise Level Versus Horsepower for Valve 2.

49
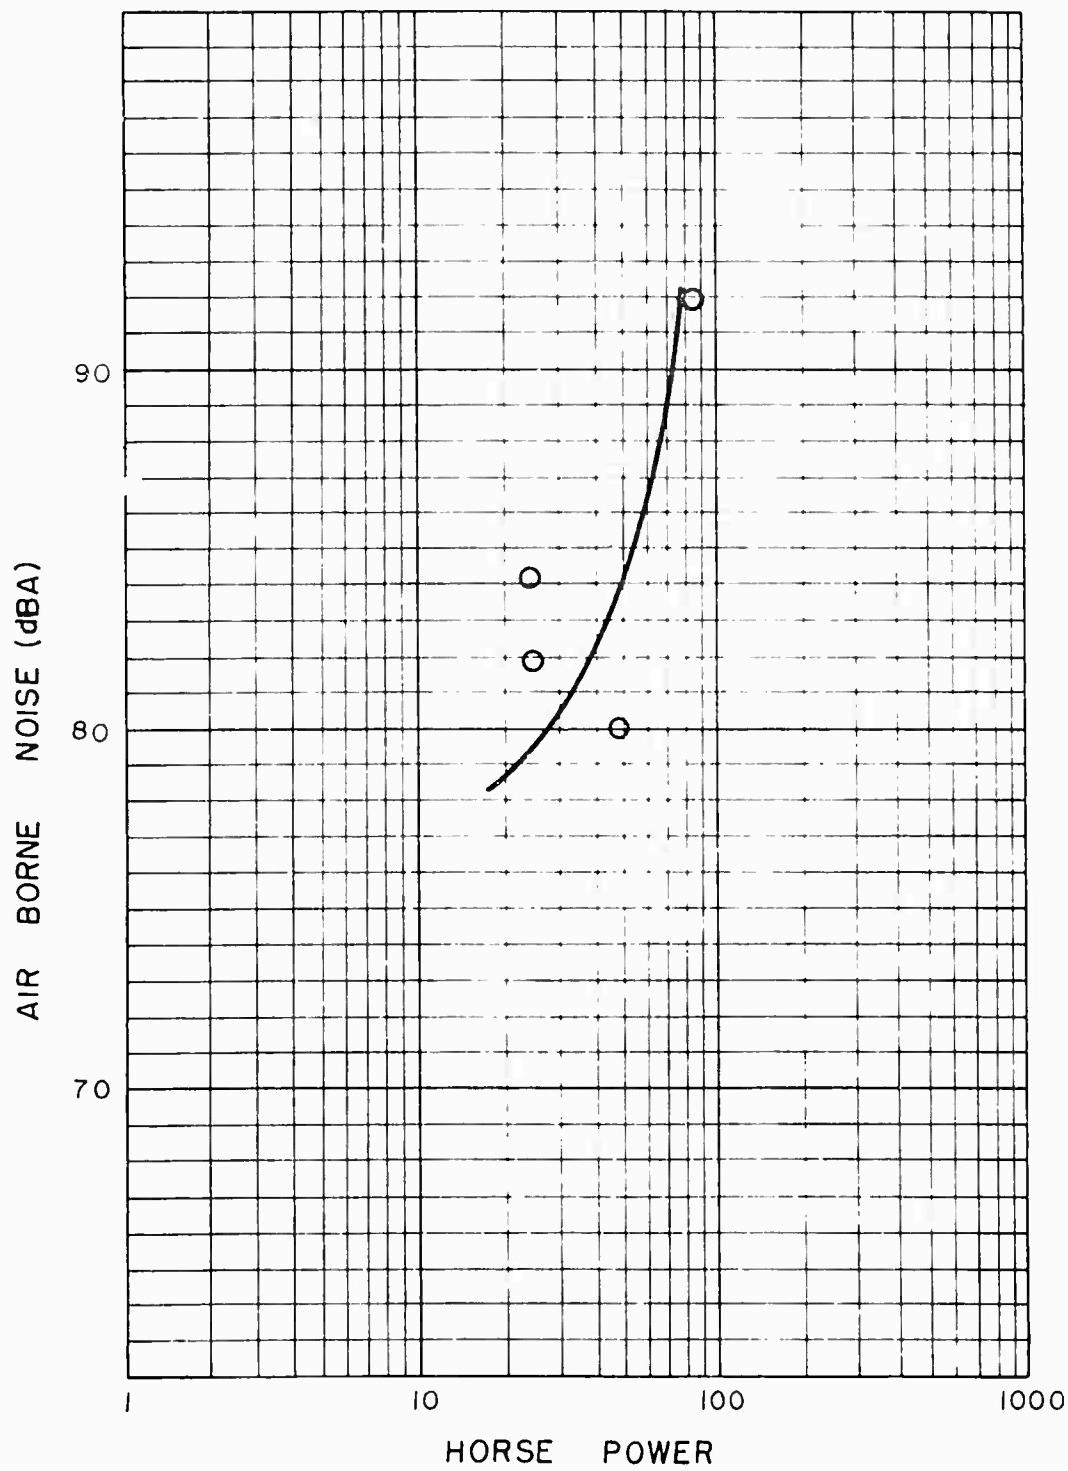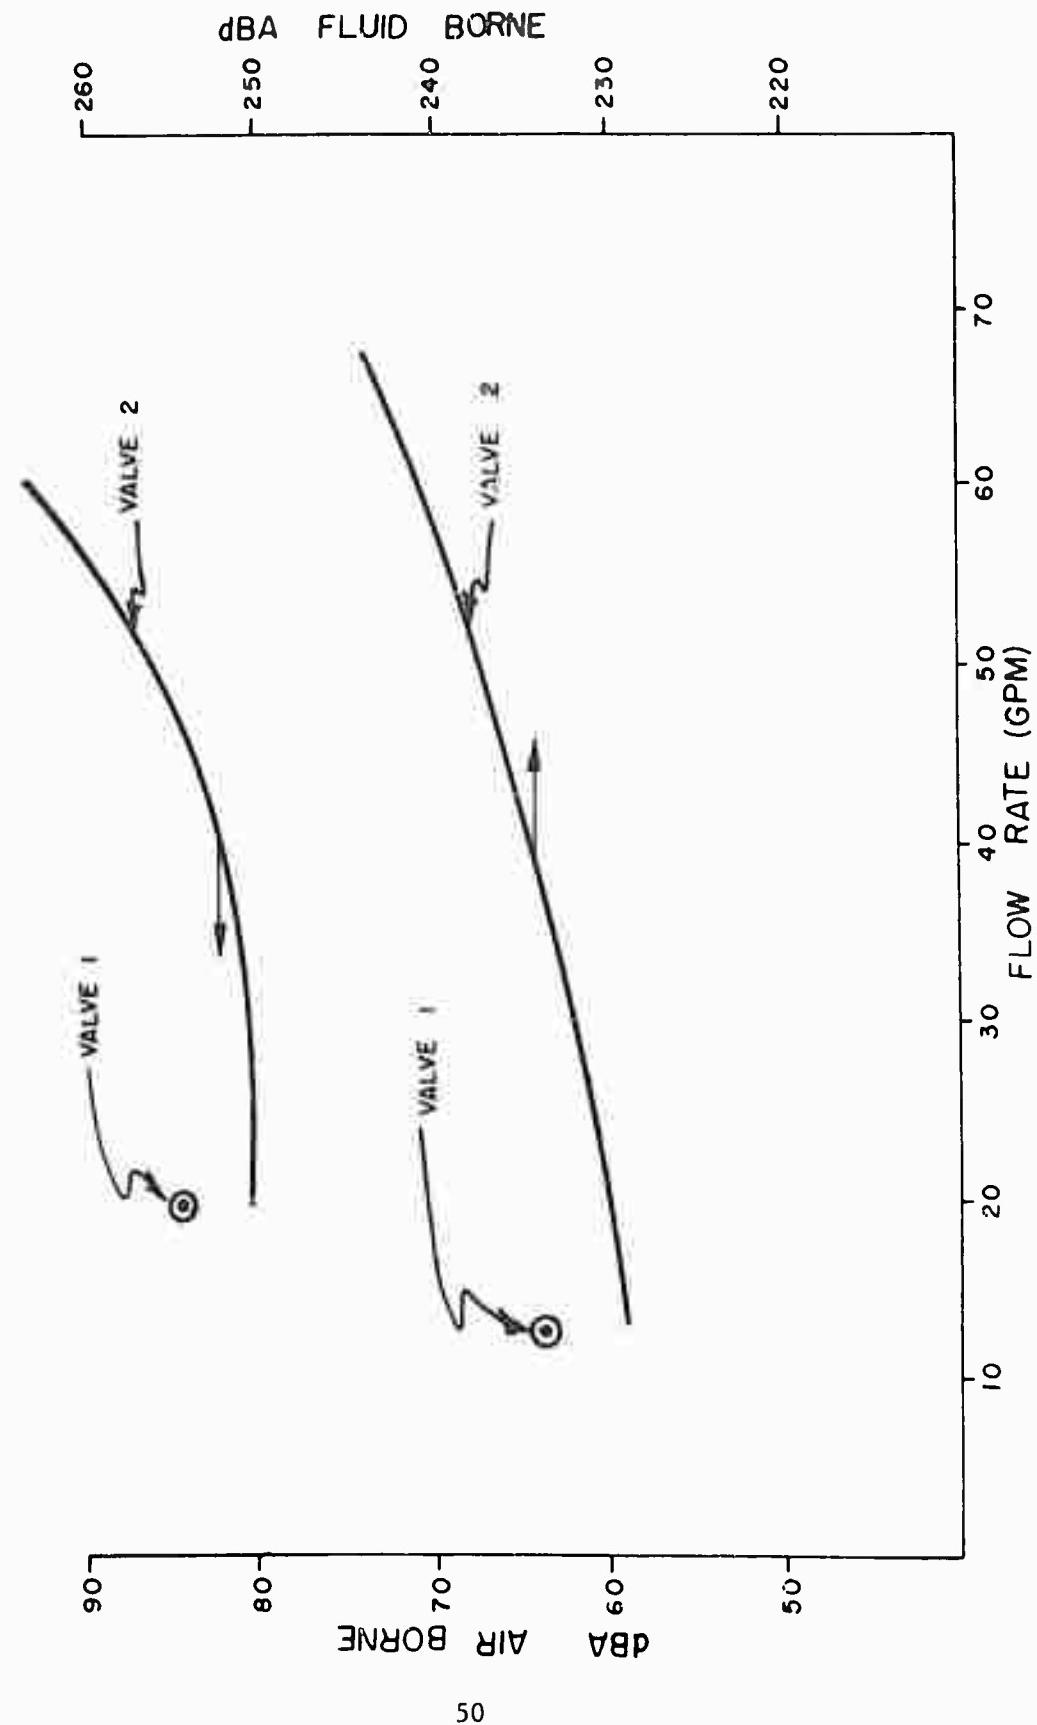
Fig. 6-2. Noise Levels of Fluid-Borne and Airborne Noise With Respect to Flow Rate.

50
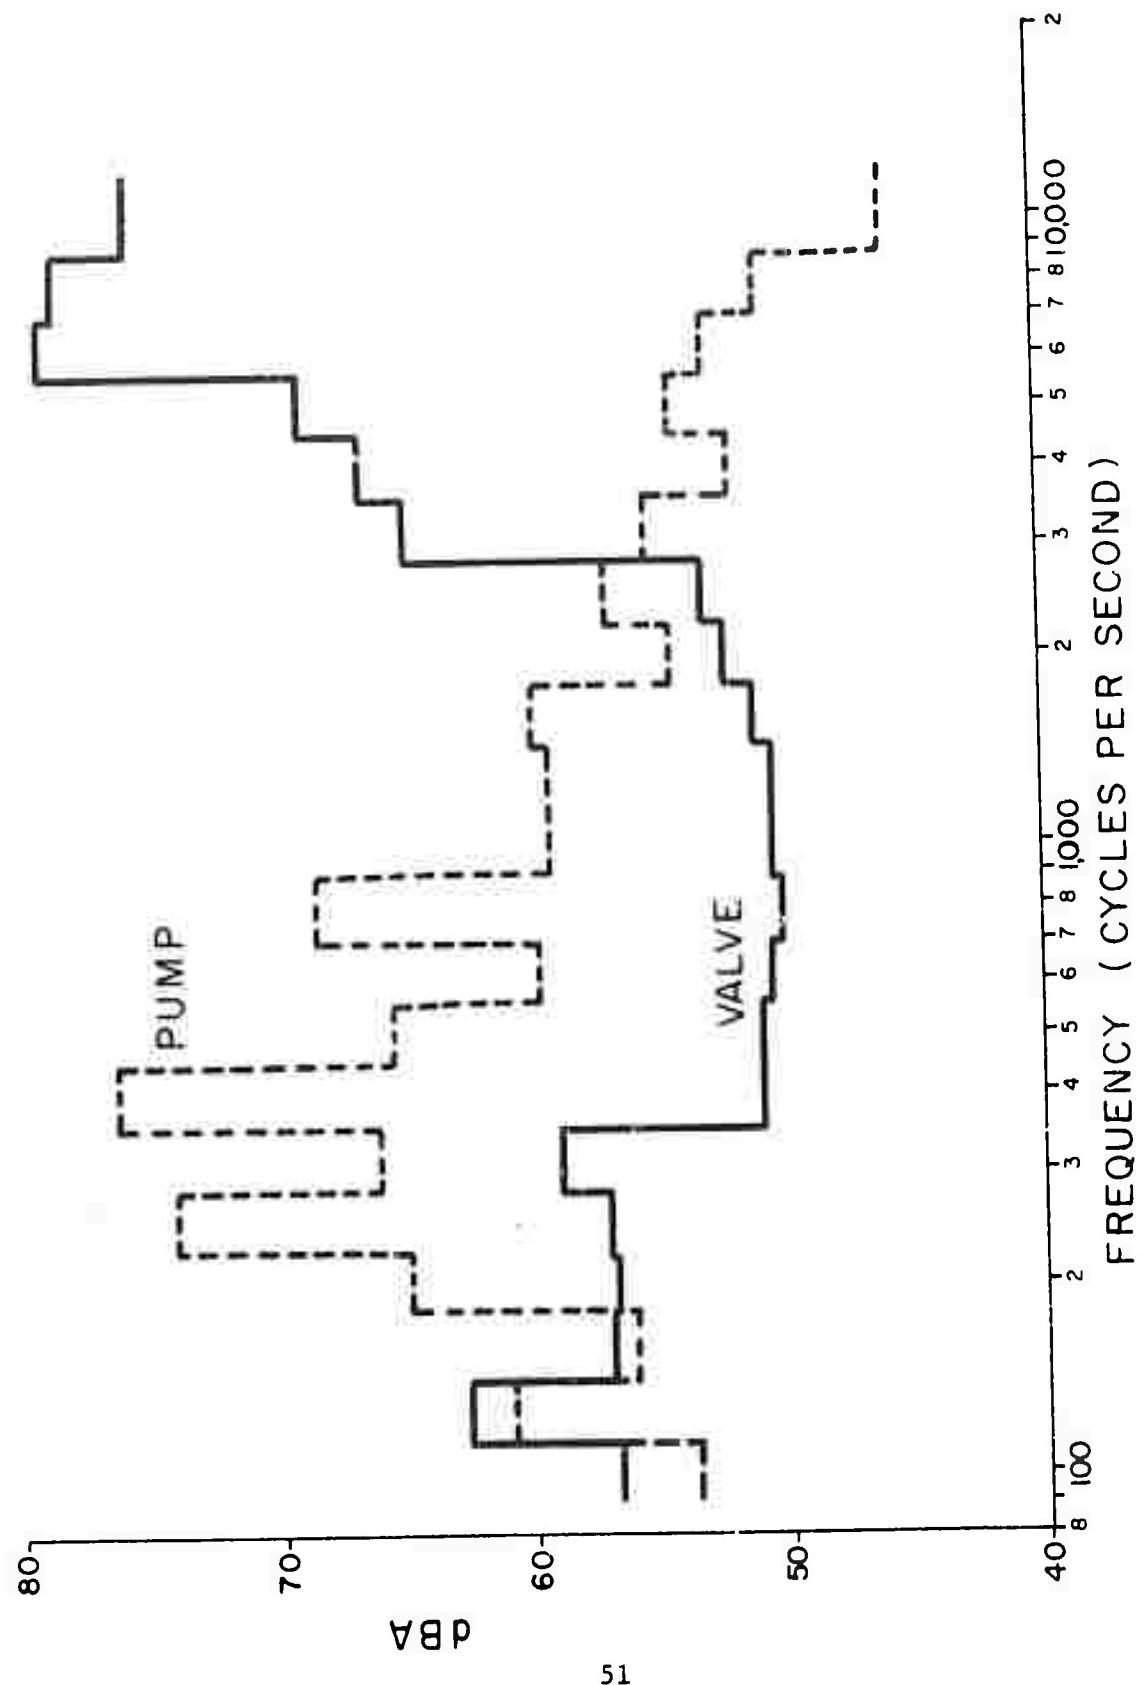
Fig. 6-3. Spectra of Pump and Valve Sound Power Levels.
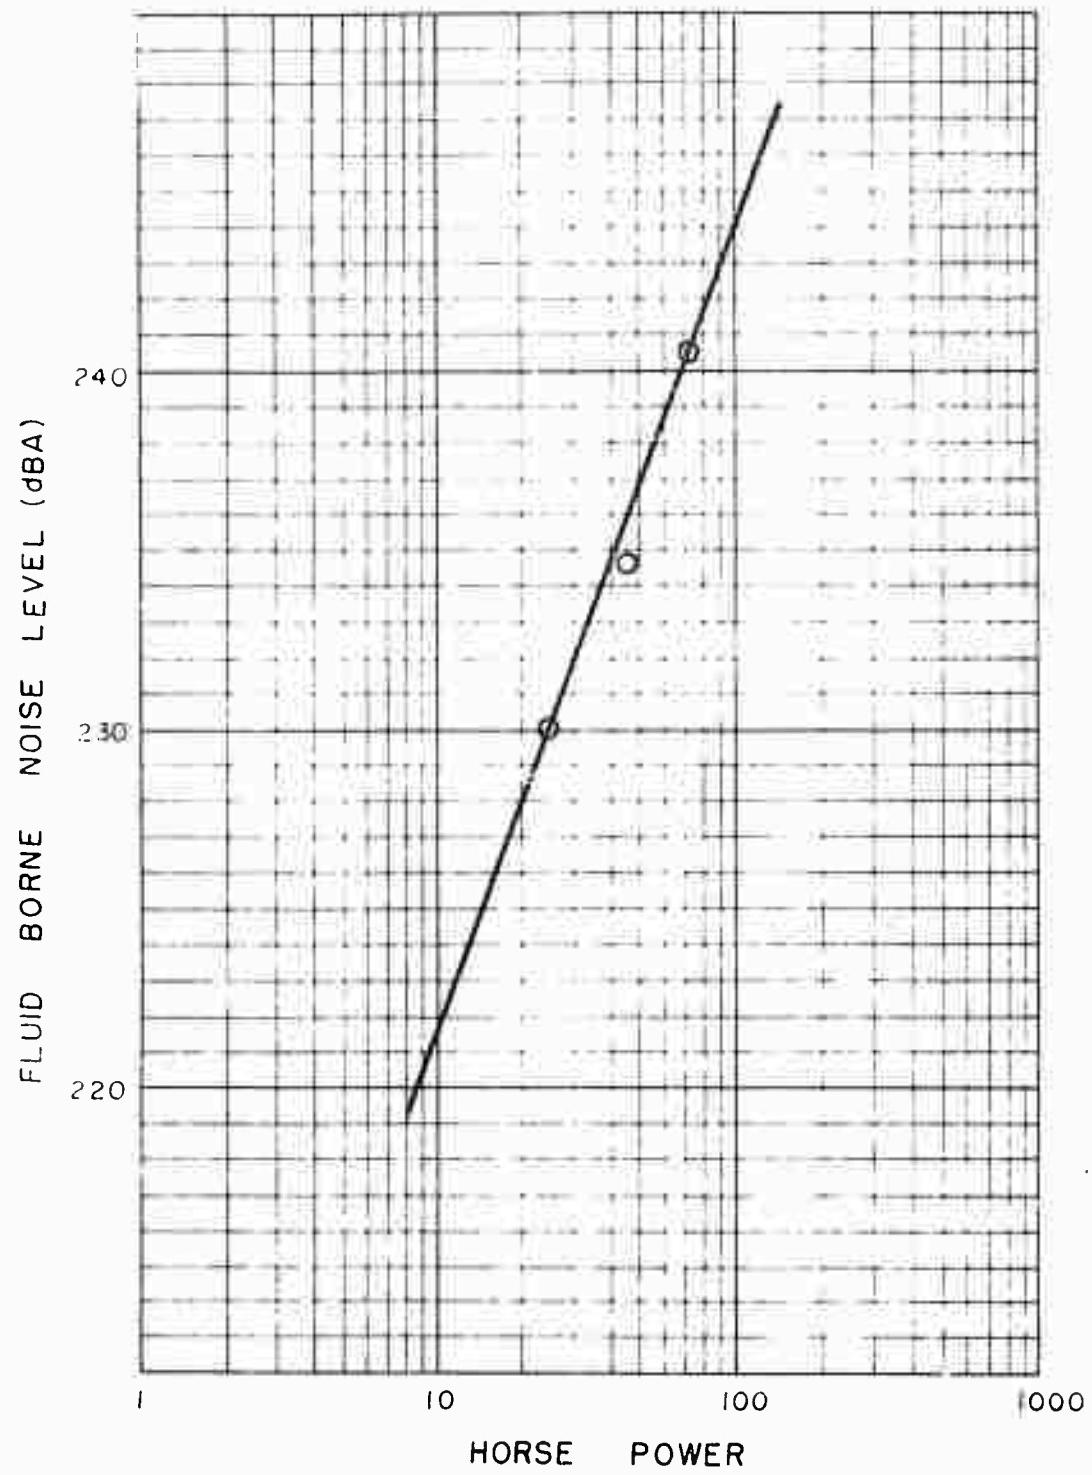
Fig. 6-4. Fluid-Borne Noise Levels Versus Horsepower for Valve 2.
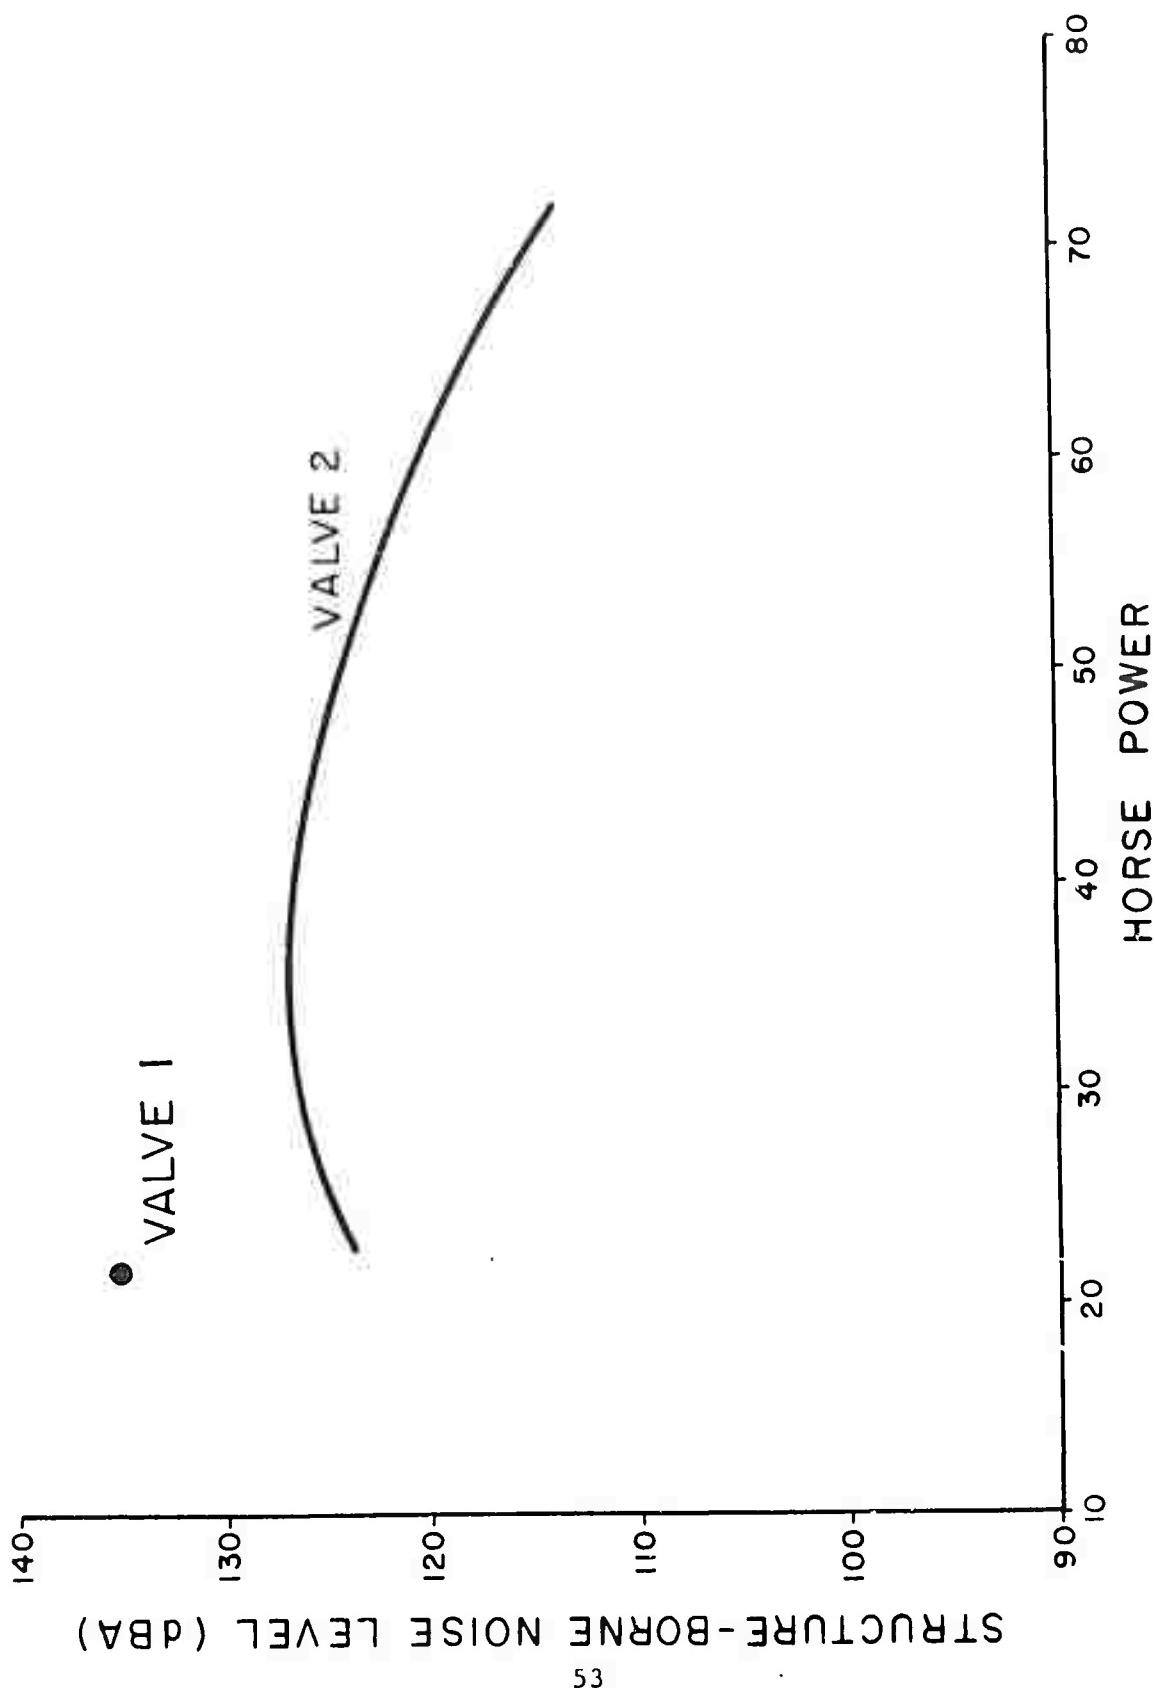
Fig. 6-5. Structure-Borne Noise Level Versus Horsepower.
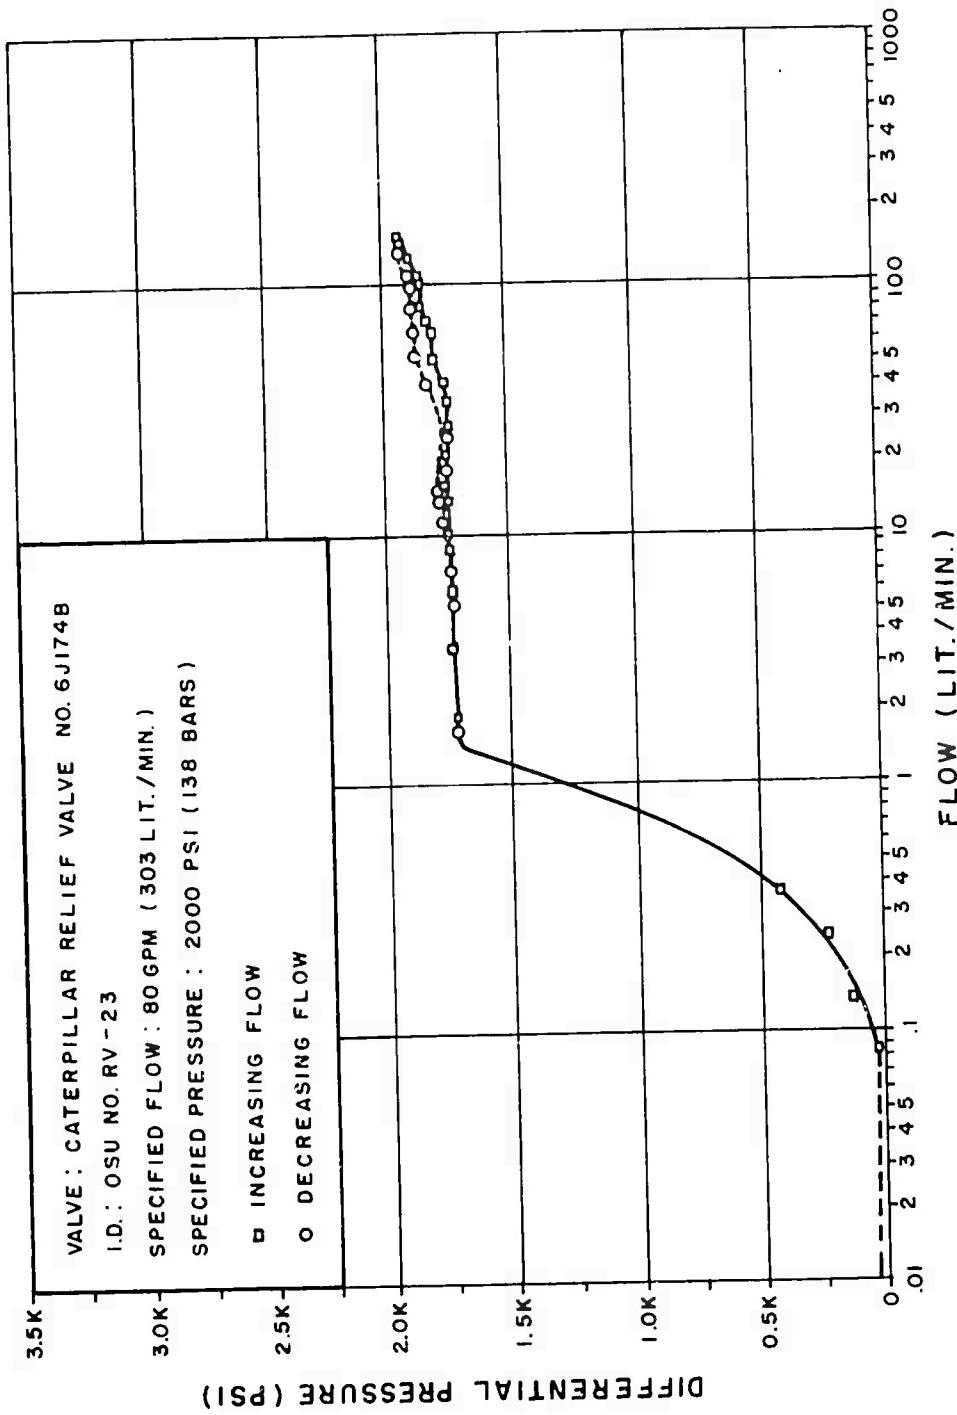
Fig. 6-6. Pressure-Flow Characteristics of Relief Valve 6J1746.

VALVE : CATERPILLAR RELIEF VALVE NO. 6J1748

I.D. : OSU NO. RV-23

SPECIFIED FLOW : 80 GPM (303 LIT./MIN.)

SPECIFIED PRESSURE : 2000 PSI (138 BARS)

□ INCREASING FLOW

○ DECREASING FLOW

DIFFERENTIAL PRESSURE (PSI)

FLOW (LIT./MIN.)

54

CHAPTER VII

PRACTICAL METHODS FOR REDUCING FLUID POWER SYSTEM NOISE

The material presented thus far in this report is the result of a study initiated by Oklahoma State University, Proposal No. ER 72-R-101, entitled "Proposal for a Study to Evaluate the Acoustical Characteristics of Selected Components in a Fluid Power System." This study ended on 1 June 1973. The noise program was extended from June 1 1973 to May 1974 under the same contract number. The proposed effort for this time period is contained in Oklahoma State University Proposal No. ER-73-R-54, "Proposal for a Study to Evaluate Practical Methods for Reducing and Predicting Fluid Power System Noise." This chapter contains a brief discussion of the proposed effort for the 1973-74 year and a tentative schedule for the individual areas of investigation. Table 7-1 lists the general areas that are to be studied, and figure 7-1 relates a proposed time schedule for each area.

Measurement of fluid-borne noise is a critical area of investigation for the next year. Several of the system oriented noise control efforts that are to be performed rely on the accurate and repeatible measurement of fluid-borne noise. New instrumentation has been obtained to aid during the measurement of fluid-borne noise. This instrumentation, when used with the theory mentioned in Chapter V and discussed in [9], shows promise of providing the accuracy and repeatability that must be attained to make a fluid-borne noise measurement procedure feasible. This instrumentation will be used during the evaluation of several fluid-borne noise attenuation devices. Both accumulator and "muffler" type fluid-borne noise attenuators have been purchased for evaluation and are projected to be tested in early December 1973.

TABLE 7-1: SUMMARY OF PROPOSED EVALUATIONS

Topic Number	Title
1	Fluid-borne Noise Measurement
2	Fluid-borne Noise Attenuation
3	Pump Sound Vs, % Air in Fluid
4	Reservoir Noise
5	Airborne Conduit Noise Isolation
6	Airborne Pump Noise Isolation
7	Pump Airborne Noise Model
8	System Airborne Noise Model

Fig. 7-1. Proposed Schedule for 1973-1974 Areas of Investigation.

Air in hydraulic oil is a major problem in fluid power systems [3]. Due to its effect on the fluid properties of the oil, a change in the fluid properties can subject parts of the system to cavitation, causing them to fail prematurely. System control can be altered due to variations in compressibility of the fluid. And, the acoustical characteristics of the system can deviate from those expected from a system without air in the oil. Noticeable increases in the sound power of pumps have been observed upon introduction of air into the system. A quantitive analysis of this phenomenon will be intiated during the current fiscal year.

Large radiating surfaces provide efficient couplings to air for structure-borne and fluid-borne noise in fluid power systems. Hydraulic reservoirs provide the surface area necessary to act as an acoustic radiator. A reservoir from the 6000 lb rough terrain forklift has been obtained for testing at the Fluid Power Research Center. The reservoir will be evaluated to determine its acoustic radiation and modified to minimize that radiation. All modifications to the reservoir will be examined for their practicality as retrofit-type modifications to existting machines as well as production changes.

Recent investigations have shown that a great deal of airborne acoustic energy is radiated from the conduits in fluid power systems due mainly to the fluid-borne noise in the conduits. Until the fluid-borne noise can be reduced to an acceptable level, more expedient methods must be used to minimize the airborne noise radiated from the system. Several types of conduit isolation are being produced by industry. Those which appear to be suitable for use with hydraulic systems will be evaluated and compared with the laboratory isolation techniques and will be investigated for minimizing the directly radiated airborne noise from fluid power pumps.

The final area of investigation involves acoustically modeling both fluid power components and fluid power systems. This particular section of the overall program will be studied continually due to the applicability of each phase of the overall program on component and system modeling.

57

CHAPTER VIII

SUMMARY, CONCLUSIONS, & RECOMMENDATIONS

The results of this project provide the fluid power industry and the U.S. Army with several necessary tools for the control of fluid power system noise. Considerable importance has been given to the development of standard test procedures for the measurement of noise generated by fluid power systems. All three types of noise (ABN, FBN, & SBN) have been considered thus far in the OSU-MERDC Program. As mentioned previously, the most significant advances have been attained in the area of airborne noise measurement. An airborne noise test procedure has been developed by industry with the aid of project personnel and is being verified by project personnel.

The sound level ordering ability of this procedure has been evaluated for various fluid power components in the OSU-FPRC reverberant measurement facility. A program to determine the reproducibility of measurements taken in different facilities using the previously mentioned test procedure has been initiated. This program includes over 30 different facilities in the United States, Europe, and Japan. Fundamental invesitgations have been initiated to determine the most reliable measurement techniques to be used in subsequent fluid-borne and structure-borne noise measurement procedures.

A draft fluid-borne noise measurement procedure (Appendix G) is the result of these investigations.

Facility verification has been a necessary area of investigation to insure the accuracy and repeatability of acoustical measurements. The ISO procedures, when used as recommended, will provide repeatable measurements in a given facility. The reproducibility between facilities is being examined at present through the OSU-FPRC acoustical facility survey. (See Appendix D).

The components that have been successfully examined for this project include pumps, valves, and conduits. The program outlined for 1973-74 will extend the investigation of airborne noise emitted by fluid power components to hydraulic reservoirs.

Several conclusions may be drawn from the various areas investigated during the 1972-73 MERDC Program in acoustics:

1. An industrial accepted procedure for the measurement of directly emitted airborne noise from fluid power pumps has been developed and is being verified with the aid of project personnel. The procedure provides the capability of rank ordering fluid power components on an airborne noise basis.

Preceding page blank

59

2. The airborne noise measurement procedure for fluid power
    pumps can be extended for use with other fluid power com-
    ponents with proper engineering judgment.

3. The sound level radiated from an average pump out of the
    spectrum of fluid power pumps evaluated at the Fluid Power
    Research Center is comparable to the sound level radiated
    from an eight foot length of hydraulic hose. This indi-
    cates that the reduction and/or elimination of the fluid-
    borne noise in fluid power systems will produce signifi-
    cant decreases in fluid power system sound levels.

4. The use of a properly employed three-transducer measurement
    array should negate the standing wave deterrent to fluid-
    borne noise measurement.

5. The relief valve tested at the Fluid Power Research cent-
    er produced total sound power levels in excess of 90 dBA
    when operating 25% below its rated flow rate. This ex-
    cessive noise production has been observed to be common-
    place for both relief valves and needle valves.

One of the major objectives of the FPRC—MERDC Acoustics Program is
the development of fluid power acoustics to such a degree that component
specifications for the purpose of fluid power system sound level reduc-
tion is practical. Many of the necessary building blocks to reach this
objective have been constructed and discussed in this report. There
are, however, several areas that must be investigated before reliable
component specifications are realized. The following recommendations
are directed toward reaching two objectives: 1) to make practical the
specification of fluid power components based on their acoustical char-
acteristics, and 2) to provide the fluid power industry with the tools
that are necessary to produce quiet fluid power components and systems.

1. The current airborne test procedure should be examined to de-
    termine its ability to produce reproducible measurements be-
    tween laboratories.

2. Continued effort should be concentrated on the development of a
    fluid-borne noise measurement procedure.

3. Isolation mechanisms which minimize ABN, FBN, and SBN paths
    should be investigated and evaluated for their applicability
    in fluid power systems.

4. The development of fluid power component noise models must be
    extended to all fluid power components.

5. The acoustical interaction of fluid power components should be
    investigated.

6. The results of recommendations 4 and 5 should be implemented

to produce a technique for predicting fluid power system
sound levels from the acoustical characteristics of fluid
power components or predicting the change in system sound
level that can be expected from changing a given component.

APPENDIX A

SELECTED REFERENCES

SELECTED REFERENCES

1. Elliott, L. R., "Acoustical Diffusivity Theory,"Basic Fluid Power
    Research Program Annual Report No. 6, Paper No. 72-AV-2B, Fluid
    Power Research Center, Oklahoma State University, September 1972.

2. Elliott, L. R., "Getting the Most From a Reverberant Noise Facility,"
    Basic Fluid Power Research Program Annual Report No. 7, Paper No.
    P73-AV-6, Fluid Power Research Center, Oklahoma State University,
    September 1973.

3. Basic Fluid Fower Research Program Annual Report Number 5, Section
    71-2, "Contamination Control," July 1971, Chapter VII, Oklahoma
    State University

4. Wells, John R., "A Theoretical and Experimental Investigation of
    the Acoustical Characteristics of Fluid Power Conduit," Master's
    Report, July 1973, Oklahoma State University

5. Elliott, L. R., G. E. Maroney, and E. C. Fitch, "An Experimental
    Survey of Fluid Power Pump Sound Levels," 29th National Conference
    on Fluid Power, Cleveland, Ohio, 25-27 September 1973.

6. ISO Recommendation, Proposed, Draft International Standard ISO/DIS
    2880. Acoustics - Determination of Sound Power Emitted by Small
    Noise Sources in Reverberation Rooms - Part I

7. ISO Recommendation, Proposed, Draft International ISO/DIS
    2946. Acoustics-Determination of Sound Power Emitted by Small
    Noise Sources in Reverberation Rooms - Part II

8. "Hydraulic System Noise Study (U), "Section III, Annual Report No.
    FPRC-2M3, Prepared for the U.S. Army Mobility Equipment Research
    and Development Center, Ft. Belvoir, Virginia, Contract Nos. DAAK02-
    71-0074 and DAAK02-72-C-0172, November 1972

9. CONESCO, "Study of Fluid-Borne Noise and the Development of Fluid
    Acoustic Filter Test Specifications and Design Rules," Report to
    Department of the Navy Bureau of Ships Code 648, Report No. F-121-1,
    May 1964, (AD443713)

APPENDIX B

INSTRUMENTATION

INSTRUMENTATION

I. GENERAL RADIO
    A. 1521-A.................................Strip Chart Recorder
    B. 1523...................................Level Recorder
    C. 1523-P1................................Preamplifier Plug In
    D. 1523-P3................................1/3 Octave band Analyzer
    E. 1523-9621.............................25 dB Potentiometer
        1523-9622.............................50 dB Potentiometer
        1523-9624.............................100 dB Potentiometer
    F. 1560-9531.............................Microphone
    G. 1560-9580.............................Tripod
    H. 1560-9666.............................Microphone Cable
    I. 1560-P13..............................Vibration Pickup System
    J. 1560-P42..............................Microphone Preamplifier
    K. 1562-A................................Sound Level Calibrator
    L. 1382..................................Random Noise Generator
    M. 1910A.................................Recording Wave Analyzer
    N. 1933..................................Precision Sound Level Meter
                                             and Octave Band Analyzer
    O. 135A..................................X-Y Recorder
    P. 130BR................................Oscilloscope
    Q. 400 LR...............................Vacuum Tube Voltmeter

II. HEWLETT PACKARD
    A. 3300-A................................Function Generator
    B. 205AG.................................Signal Generator
    C. 202CR.................................Signal Generator
    D. 410B..................................Vacuum Tube Voltmeter

III.BRUEL & KJAER

    A. 2107..................................Frequency Analyzer

IV. BOGEN

    A. CH13-35A..............................Amplifier

V. TEKTRONIX

    A. 502...................................Dual-Beam Oscilloscope
    B. RM31A.................................Oscilloscope

VI. PCB PIEZOTRONICS, INC.

    A. 118A02................................Quartz Crystal Pressure
                                             Transducer

66

APPENDIX C

ISOLATION MATERIALS

ISOLATION MATERIAL

The following materials are being used to acousitcally treat fluid lines, pump mounts, pump drive systems, and the drive support system:

1. "Duct Board" -- Rigid fiberglass with aluminum back. Owens-Corning Type 475-FR(SD)

2. Leaded Vinyl -- John Schneller & Associates, Sound/Eaze TLB-M, TLB-L

3. Leaded Vinyl -- Singer Partitions, Inc.; Super Sound Stopper

4. Aluminum Foil Reinforced Insulation -- Supplier, L. A. King Co.; Type MRA; 0.6 lb/ft^3, 1 in insulation with foil scrim kraft, light duty, NFBU rated, manufactured by Certainteed -- St. Gobain

5. Foamrubber -- 2 in Thick, 21 oz/ft^3 (21,000 gm/m^3)

6. High Temperature Damping Compound #70305 -- Sound Solutions % Ponto Sales Engineers, Tulsa

7. Pipe and Valve Covering 1#/ft^2 -- Sound Solutions % Ponto Sales Engineers, Tulsa

8. Sound Off (Damping Material) -- Sound Solutions % Ponto Sales Engineers, Tulsa

9. Dee Bee Dropper #20221 -- Sound Solutions % Ponto Sales Engineers, Tulsa.

APPENDIX D

ACOUSTICAL FACILITY SURVEY

ACOUSTICAL FACILITY SURVEY

Concurrent operation of two acoustical surveys has taken place during the last year at Fluid Power Research Center. The survey of fluid power pump sound levels is presented in Chapter IV. This appendix deals with the second survey, which will provide data that will describe the amount of correlation that can be expected from measurements of the same source in different laboratiories. An electronic source has been designed and constructed at the Fluid Power Research Center to be used as the common source to be tested by all survey participants.

The function of the electronic noise source (ENS) is to produce a constant sound level in three different modes; namely, broad band, pure tone, and oscillating pure tone. The electronic stability for the source has been evaluated to be approximately 1.12%. A list of electronic components for the ENS and a schematic have been provided in this appendix.

The acoustical facility survey participants include organizations from Japan, Germany, England, Scotland, and France Data that have been received shows the white noise standard deviation to be 0.36 dBA, and the pure tone standard deviation to be 2.1 dB.

LIST OF ELECTRONIC COMPONENTS

Component	Manufacturer	Model Number
Power Supply	ACDE Electronics, Inc.	OA15D1 .1-1
Power Supply	Elgenco	3609-A
White Noise Generator	Elgenco	3606A55124
Low Frequency Oscillator	W. H. Ferwalt, Inc.	SP01088
Voltage Controlled Oscillator	W. H. Ferwalt, Inc.	VC068513
Operational Amplifiers	Analog Devices	144A
Audio Amplifier	Arvee Engineering	202
Speaker	Altec Lansing	755-E

CORRESPONDENCE LIST FOR ACOUSTIC FACILITY SURVEY

Dr. D. Unruh
Cessna Fluid Power Division
P. O. Box 1028
Hutchinson, Kansas 67501

Mr. B. Coats
Vehicle Components Division
Technical Center, Bldg. G
Caterpillar Tractor Co.
100 N. E. Adams Street
Peoria, Illinois 61602

Mr. J. Bolinger
Sundstrand Hydro-Transmission
2800 East 13th Street
Ames, Iowa 50010

Mr. T. A. Klausing
Denison Research Center
P. O. Box 1230
Columbus, Ohio 43216

Mr. C. T. Caliri
Cincinnati Milacron, Inc.
4701 Marburg Avenue
Cincinnati, Ohio 45209

Mr. G. A. Morrell
Clark Equipment Co.
P. O. Box 188
Cassopolis, Michigan 49031

Mr. H. N. Underwood
Borg-Warner Corporation
Roy C. Ingersoll Research Center
Wolf and Algonquin Roads
Des Plaines, Illinois 60018

Mr. Z. J. Lansky
Parker-Hannifin Corporation
17325 Euclid Avenue
Cleveland, Ohio 44112

Mr. W. R. Brown
Eaton Corporation
Research Center
26201 Northwestern Highway
Southfield, Michigan 48076

Mr. T. Kostek
Commercial Shearing, Inc.
1775 Logan Avenue
Youngstown, Ohio 44501

Mr. J. Harris
J. I. Case Company
CC 124
Environmental & Electric Labor-
                          atory
Corporate Test Center
24th & Center Streets
Racine, Wisconsin 53403

Mr. W. C. Smith
IBM Corporation
Dept. 447, Bldg. 030-1
Rochester, Minnesota 55901

Mr. J. Hayes
Cummings Engine Co.
Technical Center
1900 McKinley Avenue
Columbus, Indiana 47201

Mr. F.A.M. Willekens
afd. Werktuigbouwkunde
Technische Hogeschool
Eindhoven, The Netherlands

Mr. F. W. Baggett
Serck Developments
Gloucester Trading Estate
Hucclecote
Gloucester GL3 4XE
England

Correspondence List for Acoustic Facility Survey

Professor D. McCandlish
Bath University
Bath, England

Mr. J. Currie
Special Projects Division
Department of Trade & Industry
National Fngineering Laboratory
East Kilbride
Glasgow G75 OQU
Scotland

Professor H. K. Müller
University of Stuttgart
Stuttgart
German Federal Republic

Dr. Wilhelm Grotheer
Robert Bosch GmbH
Techisch-Wissenschaftlicher Mitarbeiter
Leiter der Abteilung ARustik
7016 Gerlingen-Schillerhöhe
Robert-Bosch-Platz 1
German Federal Republic

Mr. G. LeMontille
GETIM
2 Av. Felix Louat 60304
Senlis, France

Dr. Shigen Tsuji
Professor of Engineering
Tokyo Institute of Technology
12-2 Ookayama
Meguro-Ku, Tokyo, Japan

Mr. Kendall McBroom
Project Engineer
Advance Products
CORAD Division
Donaldson Company, Inc.
1400 West 94th Street
Minneapolis, Minnesota 55440

Mr. James R. McBurnett
Chief Analytical Engineer
Tyrone Hydraulics, Inc.
P.O. Box 511
Corinth, Miss. 38834

Mr. J. W. Broome
Vice President of Engineering
Racine Hydraulics & Machinery Inc.
2000 Albert Street
Racine, Wisconsin 53404
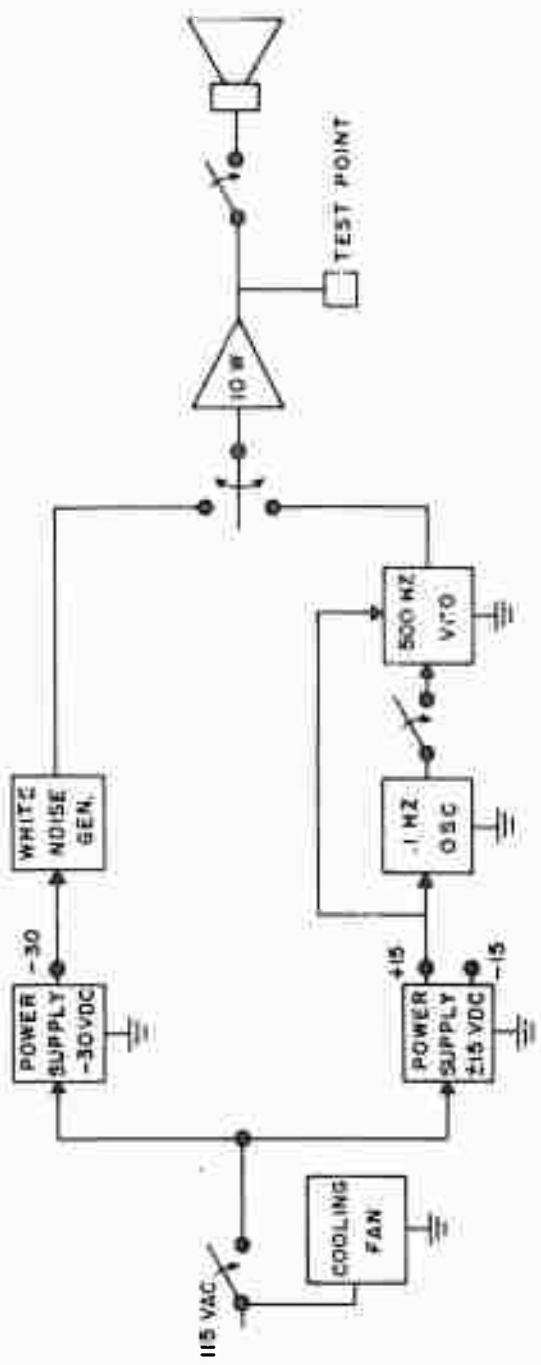
Fig. D-I. Schematic of Electronic Noise Box (ENB).

APPENDIX E

A USER'S GUIDE TO THE ACOUSTICAL DATA REDUCTION PROGRAMS

A USER'S GUIDE TO THE ACOUSTICAL DATA REDUCTION PROGRAMS

Calculations in acoustical data reduction require many detailed
and repetitive steps to be accurate. Because of the tremendous flow of
noise data through the OSU-FPRC acoustics laboratory, the use of the
computer in this capacity has become a necessity.

Three programs are given in this user's guide -- one for each of
fluid-borne, structure-borne, and airborne noise. The input data to be
used consist of noise levels taken from a third-octave band analyzer at
the 21 center frequencies between 100 and 10,000 Hz. The program will
average, on a power basis, up to ten sets of measured source levels and
up to tens sets of reference or background data. The programs are con-
sistent with each other in general form and appearance of output. Each
program is written in the FORTRAN IV language for use on the IBM 360/65
system.

The airborne noise data reduction program is longer than the other
two due to the large number of background corrections necessary. The
procedure it uses complies to the current ISO proposed test codes for
reverberant environment testing. The airborne noise program computes the
corrected values for sound power, total A-weighted sound power, and A-
weighted sound pressures at three feet from the source in a free field
over a reflecting plane.

The fluid-borne noise program corrects the measured noise levels
with instrumentation background noise data and the correction factor for
the dynamic pressure transducer. This program then computes A-weighted
power and pressure levels relative to $20\mu N/m^2$. This is consistent with
the techniques for airborne noise data reduction and aids in the deriva-
tion of transfer functions from fluid-borne to airborne noise.

The structure-borne noise program also uses instrumentation back-
ground noise and transducer correction factors to correct the input.
Acceleration levels are read into the program to compute displacement,
velocity, and acceleration for each 1/3 octave frequency, as well as
total vibrational levels.

- COMPUTATIONAL PROCEDURE -

The method of data reduction for airborne and fluid-borne noise is
illustrated and explained in detail along with similar programs in Ref.
[8] and will not be discussed here.

The input for the structure-borne noise program consists of acceler-

78

ation levels taken from 1/3 octave band analyzer, correction factors
for the transducer at each frequency, and a conversion factor of the
transducer for converting output voltage to meters/second^2. The acceler-
ation levels are first converted from decibels to an output voltage level
using the formula :

$$A = (5 \times 10^{-6})10^{a/20}$$

Where: A = acceleration output voltage from transducer
              a = acceleration input level from 1/3 octave analyzer
                  in decibels

The levels for the vibrational source and background noise are both con-
verted to power. Then, the vibrational source levels are corrected using
the noise levels and transducer and correction factors with:

$$CA = (1 + UP)(VIB - B)$$

Where: CA = corrected acceleration output voltage
             UP = transducer correction factor
            VIB = vibrational source acceleration output voltage
                  from transducer
              B = background acceleration output voltage from trans-
                  ducer

If the background noise level is greater than or equal to the vib-
rational source level, then CA is set to the minimum measurable accel-
eration level. The voltage-to-acceleration transducer factor is then
divided into these values. Then, using the basic formula for converting
vibrational acceleration to velocity and displacement, the values are
divided by their frequency, once for velocity and twice for displacement.
The decibel quantities are then found relative to 10^{-5} m/s^2 for accelera-
tion, 10^{-8} m/s for velocity, and 10^{-11} m for displacement.

- PROGRAM MODIFICATIONS -

All of the programs can be modified to reduce noise data from any
source as long as the input data are of the right form. For example, if
one were reducing airborne noise data from a relief valve, the appropriate
correction factors in the data file, such as drive shaft noise, should be
set to zero.

The structure-borne noise program uses a "voltage-to-acceleration"
transducer correction factor. If a transducer is used which reads direct-
ly in acceleration on the 1/3 octave analyzer, this factor should be set
to unity.

- PROGRAM IMPLEMENTATION -

Each program has two main parts -- the program and the data file.

The data file can be stored at the end of the program, or it can be stored separately and run together with the program. This is more acceptable if many runs are to be made with limited storage space. If disc storage is available, all comment cards should be removed and the program modified so that the data file will automatically call the program when it is run. The data file for this purpose is named a "calling program" and is a regular data file with the job control statements preceding the data. If a great quantity of data needs to be reduced regularly, this is by far the most ecomonical way.

The programs used at the OSU-FPRC acoustics laboratory are used mainly with a disc-stored program and calling program. However, the same programs with separate data files are stored in the library for occasional modifications and listings. The relationships of the programs and the name of the programs are shown in Table E-1. Note that the programs on disc are __not__ worked with after they are stored but are called by their respective calling program.

Listings of all of the programs and data files are presented in the remainder of this appendix. A listing of the disc-loading routine and disc-calling program are also included.

TABLE E-1

ACOUSTICAL DATA REDUCTION ROUTINES AND CALLING PROGRAMS

Purpose of Program	Main Program Stored in Library	Data File Stored in Library For Main Program	Main Program on Disc	Calling Program
Airborne* Noise	NOISY	abn ##	AIR	air ##
Fluid-borne Noise	PULSY	fbn	PSI	psi
Structure-borne Noise	SHAKY	sbn	VIB	vib

*The suffix "##" stands for the RPM of the system (in hundreds) on which the data file should be used. The data files will be different for different speeds because of the drive system background noise data and correction factors.

Main Program

NOISY

for

ABN Data Reduction

```
      DIMENSION A(21,10),LUB(21,10),LRB(21,10),C(21),P(21),TO(21),
     1VC(21),BO(21),LO(21),BOP(21),BP(21),LP(21),CP(21),CO(21),DO(21),
     2OP(21),D2(21),E0(21),EP(21),FP(21),FP(21),D1(21),B1(21),B1P(21),D1P(21)
     3,GP(21),GO(21),HO(21),HP(21),DAP(21),T1(21),T1P(21),OP(21),OO(21)
     4),PO(21),PP(21),BAP(21),QP(21),QO(21),AP(21),RO(21),RP(21),SP(21
     5) SO(21),BAO(21),SOA(21),SOP(21),XP(21),XO(21),B2P(21),
     6R2O(21),R2DP(21),KP(21),KO(21),RS(21)
      DOUBLE PRECISION A,LUB,LRB,C,P,TO,VO,BC,LO,BOP,BP,LP,CP,CO,
     1DO, OP,D2,EO,EP,FP,D1,B1,B1P,D1P,GP,GO,HO,HP,DAP,T1,T1P,OP,OO,
     2PO,PP,BAP,QP,QO,AP,RO,RP,SP,SO,BAC,SAO,SOP,XP,XO,B2P,SPT,OB,
     3TP,OBT,R2O,R2DP,KP,KO,RS
C
C
C     ------------------------------------------------------------
C     READ THE  1/3 OCTAVE CENTER FREQUENCIES TO BE
C     USED IN THIS PROGRAM
C     ------------------------------------------------------------
C
      READ(5,20)(A(I,1),I=1,21)
   20 FORMAT(7F10.3)
      CONTINUE
C
C     ------------------------------------------------------------
C     THE NEXT 21 NUMBERS ARE THE SOUND POWER CALIBRATION
C     VALUES.  A(I,4) BEING THOSE USED FOR CORRECTING THE UNKNOWN,
C     AND RS(I) BEING THOSE USED TO CORRECT ALL OTHER MEASUREMENTS.
C     ------------------------------------------------------------
C
      READ(5,20)(A(I,4),I=1,21)
      CONTINUE
      READ(5,20)(RS(I),I=1,21)
C
C     ------------------------------------------------------------
C     THE NEXT 21 NUMBERS ARE THE CORRECTION FACTORS
C     USED TO CONVERT TO DBA
C     ------------------------------------------------------------
C
      READ(5,20)(C(I),I=1,21)
      CONTINUE
C
C     ------------------------------------------------------------
C     READ IN (N) AND (M) WHERE (N) IS THE NUMBER OF
C     MEASURMENTS OF THE UNKNOWN SOURCE TO BE AVERAGED AND
C     (M) IS THE NUMBER OF MEASURMENTS OF THE REFERENCE
C     SOURCE TO BE AVERAGED
C     ------------------------------------------------------------
C
C
      READ(5,10)N,M
C
C     ------------------------------------------------------------
C     READ THE VALUES FOR THE FLUID POWER SYSTEM PARAMETERS
C     NP=OSU PUMP NUMBER, NPR=SYSTEM PRESSURE, NI=INLET
C     PRESSURE, NS= SYSTEM RPM, FR=FLOW RATE, TEM= SYSTEM
C     TEMPERATURE
C     ------------------------------------------------------------
C
      READ(5,25)NP
      READ(5,25)NPR
```

```
      READ(5,25)NI                                        00001170
      READ(5,25)NS                                        00001180
      READ(5,28)FR                                        00001190
      READ(5,28)TEM                                       00001200
   25 FORMAT(I5)                                          00001210
   28 FORMAT(F5.1)                                        00001220
   26 FORMAT(25X,29HSYSTEM PARAMETERS FOR OSU-NP-,I2)     00001230
   10 FORMAT(2I5)                                         00001240
C                                                         00001250
C     ----------------------------------------------     00001260
C     READ THE VALUES FOR THE UNKNOWN SOURCE (LUB)        00001270
C     ----------------------------------------------     00001280
C                                                         00001290
      READ(5,20)((LUB(I,J),I=1,21),J=1,N)                 00001300
      IF(N.EQ.1)GO TO 21                                  00001320
C                                                         00001330
C     ----------------------------------------------     00001340
C     COMPUTE THE AVERAGE OF (N) MEASURMENTS OF (LUB)     00001350
C     ----------------------------------------------     00001360
C                                                         00001370
      DO 40 I=1,21                                        00001380
      AV=0.0                                              00001390
      DO 30 J=1,N                                         00001400
      AV=AV+LUB(I,J)                                      00001410
   30 CONTINUE                                            00001420
      A(I,2)=AV/N                                         00001430
   40 CONTINUE                                            00001440
      GO TO 45                                            00001450
   21 DO 22 I=1,21                                        00001460
      A(I,2)=LUB(I,1)                                     00001470
   22 CONTINUE                                            00001480
C                                                         00001490
C     ----------------------------------------------     00001500
C     READ THE VALUES FOR THE REFERENCE SOURCE (LRB)      00001510
C     ----------------------------------------------     00001520
C                                                         00001530
   45 READ(5,20)((LRB(I,J),I=1,21),J=1,M)                 00001540
C                                                         00001550
C     ----------------------------------------------     00001560
C     READ THE VALUES FOR THE OUTSIDE SOUND LEVEL (T1)    00001570
C     ----------------------------------------------     00001580
C                                                         00001590
      READ(5,20)(T1(I),I=1,21)                            00001600
      IF(M.EQ.1)GO TO 23                                  00001610
C                                                         00001620
C     ----------------------------------------------     00001630
C     COMPUTE THE AVERAGE OF (M) MEASURMENTS OF (LRB)     00001640
C     ----------------------------------------------     00001650
C                                                         00001660
      DO 70 I=1,21                                        00001670
      AB=0.0                                              00001680
      DO 60 J=1,M                                         00001690
      AB=AB+LRB(I,J)                                      00001700
   60 CONTINUE                                            00001710
      A(I,3)=AB/M                                         00001720
   70 CONTINUE                                            00001730
      GO TO 75                                            00001740
   23 DO 24 I=1,21                                        00001750
```

85

```
      A(I,3)=LRB(I,1)                                       00001760
   24 CONTINUE                                              00001770
C                                                           00001780
C     ------------------------------------------------      00001790
C     READ THE TRANSMISSON LOSS FOR THE ROOM WALL (TO)      00001800
C     ------------------------------------------------      00001810
C                                                           00001820
   75 READ(5,20)(TO(I),I=1,21)                              00001830
C                                                           00001840
C     ------------------------------------------------      00001850
C     READ THE VANE BACKGROUND (VO)                         00001860
C     ------------------------------------------------      00001870
C                                                           00001880
      READ(5,20)(VO(I),I=1,21)                              00001890
C                                                           00001900
C     ------------------------------------------------      00001910
C     READ THE BUILDING BACKGROUND (BO)                     00001920
C     ------------------------------------------------      00001930
C                                                           00001940
      READ(5,20)(BO(I),I=1,21)                              00001950
C                                                           00001960
C     ------------------------------------------------      00001970
C     READ THE REFERENCE SOURCE FOR CORRECTING (VO) AND (BO) 00001980
C     ------------------------------------------------      00001990
C                                                           00002000
      READ(5,20)(LO(I),I=1,21)                              00002010
C                                                           00002020
C     ------------------------------------------------      00002030
C     READ THE DRIVE BACKGROUND IN THE ROOM (D2)            00002040
C     ------------------------------------------------      00002050
C                                                           00002060
      READ(5,20)(D2(I),I=1,21)                              00002070
C                                                           00002080
C     ------------------------------------------------      00002090
C     READ THE DRIVE BACKGROUND OUTSIDE OF THE ROOM (D1)    00002100
C     ------------------------------------------------      00002110
C                                                           00002120
      READ(5,20)(D1(I),I=1,21)                              00002130
C                                                           00002140
C     ------------------------------------------------      00002150
C     READ THE BUILDING BACKGROUND OUTSIDE OF THE ROOM (B1) 00002160
C     ------------------------------------------------      00002170
C                                                           00002180
      READ(5,20)(B1(I),I=1,21)                              00002190
C                                                           00002200
C     ------------------------------------------------      00002210
C     READ THE REFERENCE SOURCE FOR CORRECTING (D2)         00002220
C     ------------------------------------------------      00002230
C                                                           00002240
      READ(5,20)(R2D(I),I=1,21)                             00002250
C                                                           00002260
C     ------------------------------------------------      00002270
C     COMPUTE THE SOUND POWER OF THE UNKNOWN SOURCE IN DBA  00002280
C     ------------------------------------------------      00002290
C                                                           00002300
      DO 80 I=1,21                                          00002310
      R2DP(I)=10.**((R2D(I)-74.)/10.)                       00002320
      BDP(I)=BO(I)+RS(I)-LO(I)                              00002330
```

86

```
      BP(I)=10.**((BOP(I)-74.)/10.)                                    00002340
      KP(I)=R2DP(I)-BP(I)                                              00002350
      LP(I)=10.**((LO(I)-74.)/10.)                                     00002360
      CP(I)=LP(I)-BP(I)                                                00002370
      IF(BP(I).GE.LP(I))CP(I)=1.0/10.**3.5                             00002380
      CO(I)=10.*DLOG10(CP(I))+74.                                      00002390
      DO(I)=V0(I)+RS(I)-CO(I)                                          00002400
      DP(I)=10.**((DO(I)-74.)/10.)                                     00002410
      B2P(I)=DP(I)                                                     00002420
      XP(I)=LP(I)-B2P(I)                                               00002430
      IF(B2P(I).GE.LP(I))XP(I)=1.0/10.**3.5                            00002440
      XO(I)=10.*DLOG10(XP(I)+74.                                       00002450
      KO(I)=10.*DLOG10(KP(I))+74.                                      00002460
      EO(I)=C2(I)+RS(I)-KO(I)                                          00002470
      EP(I)=10.**((EO(I)-74.)/10.)                                     00002480
      FP(I)=EP(I)-B2P(I)                                               00002490
      IF B2P(I).GE.FP(I))FP(I)=1.0/10.**3.5                            00002500
      D1P(I)=10.**((D1(I)-74.)/10.)                                    00002510
      B1P(I)=10.**((B1(I)-74.)/10.)                                    00002520
      GP(I)=D1P(I)-B1P(I)                                              00002530
      IF(B1P(I).GE.D1P(I))GP(I)=1.0/10.**3.5                           00002540
      GO(I)=10.*DLOG10(GP(I))+74.                                      00002550
      HO(I)=GO(I)-TO(I)                                                00002560
      HP(I)=10.**((HO(I)-74.)/10.)                                     00002570
      DAP(I)=FP(I)-HP(I)                                               00002580
      IF(HP(I).GE.FP(I))DAP(I)=1.0/10.**3.5                            00002590
      T1P(I)=10.**((T1(I)-74.)/10.)                                    00002600
      CP(I)=T1P(I)-B1P(I)                                              00002610
      IF(B1P(I).GE.T1P(I))OP(I)=1.0/10.**3.5                           00002620
      DO(I)=10.*DLOG10(OP(I))+74.                                      00002630
      PO(I)=DO(I)-TO(I)                                                00002640
      PP(I)=10.**((PO(I)-74.)/10.)                                     00002650
      BAP(I)=PP(I)+DAP(I)+B2P(I)                                       00002660
      AP(I)=10.**((A(I,3)-74.)/10.)                                    00002670
      JP(I)=AP(I)-B2P(I)                                               00002680
      IF(B2P(I).E.AP(I))JP(I)=1.0/10.**3.5                             00002690
      JO(I)=10.*DLOG10(JP(I))+74.                                      00002700
      RO(I)=A(I,2)+A(I,4)-JO(I)                                        00002710
      RP(I)=10.**((RO(I)-74.)/10.)                                     00002720
      SP(I)=RP(I)-BAP(I)                                               00002730
      IF(BAP(I).GE.RP(I))SP(I)=1.0/10.**3.5                            00002740
      A(I,5)=A(I,4)-JO(I)                                              00002750
      SO(I)=10.*DLOG10(SP(I))+74.                                      00002760
      A(I,6)=SO(I)                                                     00002770
      BAO(I)=10.*DLOG10(BAP(I))+74.                                    00002780
      A(I,7)=BAO(I)                                                    00002790
      P(I)=A(I,6)-7.0                                                  00002800
      A(I,10)=A(I,6)+C(I)                                              00002810
      A(I,9)=(10.**(A(I,10)/10.))/10.**12.                            00002820
      A(I,8)=DO(I)                                                     00002830
      A(I,11)=A(I,1)                                                   00002840
      SOA(I)=SO(I)+C(I)                                                00002850
      SOP(I)=(10.**(SOA(I)/10.))/10.**12.                             00002860
   80 CONTINUE                                                         00002870
      TP=0.0                                                           00002880
      SPT=0.0                                                          00002890
      OB=0.0                                                           00002900
      DO 90 I=1,21                                                     00002910
```

```
      SPT=SPT+SP(I)                                            00002920
      DB=DB+A(I,10)                                            00002930
      TP=TP+SOP(I)                                             00002940
   90 CONTINUE                                                 00002950
      DBT=10.*DLOG10(SPT)+74.                                  00002950
      DBA1=10.*DLOG10(TP*10.**12.)                             00002970
      DB7=DB/1-7.0                                             00002980
      PPS=NPR                                                  00002984
      HPR=(PRS*FR)/1714.                                       00002985
C                                                              00002990
C     -------------------------------------------------       00003000
C                                                              00003000
C     PRINT THE OUTPUT TABLE FOR THE UNKNOWN SOURCE (LUB)      00003010
C     -------------------------------------------------       00003020
C                                                              00003030
      WRITE(6,150)                                             00003040
      WRITE(6,150)                                             00003050
      WRITE(6,160)                                             00003060
      WRITE(6,170)                                             00003070
      WRITE(6,120)                                             00003080
      WRITE(6,130)                                             00003090
      WRITE(6,120)                                             00003100
      WRITE(6,100)((A(I,J),J=1,11),I=1,21)                     00003110
      WRITE(6,120)                                             00003120
      WRITE(6,135)DBT                                          00003130
      WRITE(6,133)TP                                           00003140
      WRITE(6,140)DBA1                                         00003150
      WRITE(6,136)DB7                                          00003160
      WRITE(6,120)                                             00003170
      WRITE(6,26)NP                                            00003180
      WRITE(6,201)HPR                                          00003185
      WRITE(6,27)NPR,VI,NS,FR,TFM                              00003190
      WRITE(6,120)                                             00003200
      WRITE(6,125)                                             00003210
  100 FORMAT(1X,F6.0,3F7.1,F6.1,3F7.1,3X,DB.2,F7.1,2X,F6.0)    00003220
  120 FORMAT(1X,8JH---------------------------------------------------JJ003230
     1-------------------------- )                             00003240
  125 FORMAT(/////)                                            00003250
  130 FORMAT(2X,80HFREQ    LUB     LRB     LR    CORR   LU    BA    VA 00003260
     1   PWR     CBA     FREQ    )                             00003270
  133 FORMAT(1X,57HTCTAL "A" WEIGHTED POWER --------------------------00003280
     1--- ,D8.2)                                               00003290
  134 FORMAT(9X,63H"ACTUAL LEVELS ARE LESS THAN OR EQUAL TO THOSE PRESEN00003300
     1TED BELOW")                                              00003310
  135 FORMAT(1X,35HUNWEIGHTED SOLND POWER ------------,F6.2,1X,2HCB)   00003320
  136 FORMAT(1X,67HTHREE FEET FROM THE SOURCE IN A HEMISPHERICALLY DIVER00003330
     1GENT FIELD  **,F6.2,1X,6HDBA **)                         00003340
  140 FORMAT(1X,67H"A" WEIGHTED SOUND POWER --------------------------00003350
     1--------------,F6.2,1X,3HDBA)                            00003360
  150 FORMAT(/)                                                00003370
  160 FORMAT(37X,8HOSJ-FPRC)                                   00003380
  170 FORMAT(26X,29HACCUSTICS LABORATORY DATA LOG)             00003390
   27 FORMAT(1X,9HPRESSURE=,I4,3HPSI,2X,6HINLET=,I2,3HPSI,     00003400
     12X,6HSPEED=,I4,3HRPM,2X,10HFLOW RATE=,F4.1,1HG,2X,       00003410
     212HTEMPERATURE=,F4.1,1HC)                                00003420
  201 FORMAT(32X,12HHORSE POWER =,F6.2,2HHP)                   00003425
      STOP                                                     00003430
      END                                                      00003440
```

88

- DATA FILE STRUCTURE FOR AIRBORNE NOISE WITH PARAMETERS

LISTED IN ORDER OF OCCURRENCE IN DATA FILE -

A(I,1)   The 21 third-octave center frequencies at which measure-
              ments are taken (7F10.3).

A(I,4)   The 21 values of reference source output to be used for
              environmental correction (7F10.3).

RS(I)   The 21 values of reference source used with R2D(I).

C(I)   The 21 correction factors for converting dB to dBA
              (7F10.3).

N & M   N is the number of sets of unknown source data to be
              averaged. M is the number of sets of reference source
              data to be averaged (2I5).

NP   Pump identification number (I5).

NPR   System pressure (I5).

NI   Inlet pressure (I5).

NS   System rpm (I5).

FR   Flow rate in gpm (F5.1).

TEM   System temperature (F5.1).

LUB(I,N)   N sets of unknown source output data (7F10.1).

LRB(I,M)   M sets of reference source output data (7F10.1).

T(I)   The 21 outside sound level values (7F10.1,.

TO(I)   The 21 values of transmission loss for the reverberant
              room (7F10.1).

VO(I)   The 21 values of diffuser noise background.

BO(I)   The 21 values of building noise background.

LO(1)   The 21 values of the reference source   ecting
              VO and BO.

89

D2(I)   The 21 values of drive system background inside the
             room.

D1(I)   The 21 values of drive system background outside the
             room.

B1(I)   The 21 values of building background outside of the
             room.

R2D(I)   The 21 values of the reference source for correcting
             D2.

TABLE E-2: Data File ABN ##.

60.	00000060	100.	125.	160.	200.	250.	315.	400.
70.	00000070	500.	630.	800.	1000.	1250.	1600.	2000.
80.	00000080	2500.	3150.	4000.	5000.	6300.	8000.	10000.
90.	00000090	71.9	75.1	75.0	75.3	74.9	76.2	75.2
100.	00000100	76.3	75.8	75.4	75.0	74.5	75.1	74.7
110.	00000110	75.8	74.9	74.6	75.1	74.5	75.0	71.6
120.	00000120	72.	75.5	75.5	75.5	75.5	76.	75.
130.	00000130	76.	75.5	76.	75.5	75.5	76.	75.5
140.	00000140	76.	75.5	75.	75.	72.5	75.	71.5
150.	00000150	-19.1	-16.1	-13.2	-10.8	-8.6	-6.5	-4.8
160.	00000160	-3.3	-1.9	-0.8	0.0	0.5	1.0	1.2
170.	00000170	1.2	1.2	1.0	0.5	-0.2	-1.1	-2.4
180.	00000180	1	1					
190.	00000190	4						
200.	00000200	2000						
210.	00000210	0						
220.	00000220	600						
230.	00000230	6.0						
240.	00000240	38.0						
250.	00000250	65.9	56.6	57.	64.	58.6	63.3	67.
260.	00000260	57.5	57.8	53.2	51.3	51.	48.7	44.2
270.	00000270	45.9	45.3	49.2	45.4	46.2	47.9	47.2
280.	00000280	68.3	71.7	74.	75.3	77.6	77.	76.3
290.	00000290	73.8	73.2	74.	75.8	75.3	75.7	75.
300.	00000300	75.9	75.6	74.2	73.4	74.	73.2	64.2
310.	00000310	85.	74.	67.9	69.5	68.8	71.	70.1
320.	00000320	63.3	66.7	62.8	60.5	60.2	58.2	61.
330.	00000330	61.8	58.2	56.9	57.5	57.	59.6	54.6
340.	00000340	20.	21.5	24.	26.	28.	29.5	32.5
350.	00000350	34.5	34.5	34.5	34.5	34.5	34.5	34.5
360.	00000360	34.5	34.5	36.	39.	42.	44.5	47.
370.	00000370	48.4	49.8	40.2	39.	39.	39.	39.
380.	00000380	39.	39.	40.	42.2	39.	39.	39.
390.	00000390	39.	39.	39.	39.	39.	39.	39.
400.	00000400	46.8	48.5	39.	39.	39.	39.	39.
410.	00000410	39.	39.	39.	39.	39.	39.	39.
420.	00000420	39.	39.	39.	39.	39.	39.	39.
430.	00000430	69.3	70.8	73.3	74.6	73.8	74.3	73.2
440.	00000440	73.6	73.7	73.8	74.8	74.9	75.	74.3
450.	00000450	75.	74.6	73.2	72.8	73.	72.7	67.
460.	00000460	54.	55.8	53.2	74.3	57.2	57.6	57.
470.	00000470	55.	56.2	60.9	55.9	56.8	60.6	52.1
480.	00000480	52.6	51.7	45.8	45.3	47.3	47.3	42.
490.	00000490	69.3	64.3	70.2	64.3	64.3	61.4	65.4
500.	00000500	64.	60.	62.3	62.	58.8	58.	54.7
510.	00000510	51.9	49.	52.	49.8	51.	53.4	47.3
520.	00000520	46.3	48.6	43.3	43.6	39.	39.	39.
530.	00000530	39.	39.	39.	39.	39.	39.	39.
540.	00000540	39.	39.	39.	39.	39.	39.	39.
550.	0000055	70.	71.7	73.	75.8	76.1	76.7	75.
560.	00000560	73.5	74.2	76.2	74.2	75.2	75.1	75.
570.	00000570	75.5	75.	73.9	73.5	74.1	73.9	68.3
590.	00000590	//						

91.

TABLE E.3: ABN Sample Output.

OSU-F PRC

ACOUSTICS LABORATORY DATA LOG

FREQ	LUB	LRB	LR	CORR	LU	BA	VA	PWR	DBA	FREQ
100.	65.5	68.3	71.9	3.7	67.5	65.4	51.1	0.690-07	48.4	100.
125.	56.6	71.7	75.1	3.5	39.0	60.3	54.6	0.190-09	27.9	125.
160.	57.0	74.0	75.0	1.0	54.4	55.5	42.4	0.130-07	41.2	160.
200.	64.0	75.3	75.3	0.0	39.0	74.0	39.9	0.650-09	28.2	200.
250.	58.6	77.6	74.9	-2.7	39.0	56.7	40.7	0.110-08	30.4	250.
315.	63.5	77.0	76.2	-0.8	51.1	57.0	40.7	0.290-06	54.6	315.
400.	47.0	76.3	75.2	-1.1	55.3	57.0	40.8	0.110-05	61.5	400.
500.	57.5	73.8	76.3	2.5	56.4	57.5	41.4	0.200-06	53.1	500.
630.	57.8	73.2	75.8	2.6	57.3	57.5	40.8	0.340-06	55.4	630.
800.	53.2	74.0	75.4	1.4	39.0	52.7	42.2	0.650-04	38.2	800.
1000.	51.2	75.8	75.0	-0.8	39.0	57.2	42.9	0.790-08	39.0	1000.
1250.	51.0	75.3	74.5	-0.8	39.0	57.1	39.6	0.870-08	39.5	1250.
1600.	48.7	75.7	75.1	-0.6	39.0	61.4	40.0	0.100-07	47.0	1600.
2000.	44.2	75.0	74.7	-0.3	39.0	52.6	40.2	0.100-07	40.2	2000.
2500.	45.9	75.9	75.8	-0.1	39.0	53.1	40.0	0.100-07	40.2	2500.
3150.	45.3	75.6	74.9	-0.7	39.0	52.2	39.9	0.100-07	40.2	3150.
4000.	49.2	74.2	74.6	0.4	46.2	46.9	40.8	0.530-07	47.2	4000.
5000.	45.4	73.4	75.1	1.7	35.3	46.8	41.2	0.380-08	35.8	5000.
6300.	46.2	74.0	74.5	0.5	39.8	45.7	38.5	0.920-08	39.6	6300.
8000.	47.9	73.2	75.0	1.8	43.8	48.4	41.3	0.190-07	42.7	8000.
10000.	47.2	68.2	71.6	3.4	49.1	45.2	43.5	0.470-07	45.7	10000.

UNWEIGHTED SOUND POWER ------------------- 70.70 DB
TOTAL "A" WEIGHTED POWER ------
"A" WEIGHTED SOUND POWER ------------------ 0.220-05 ------- 63.50 DBA
THREE FEET FROM THE SOURCE IN A HEMISPHERICALLY DIVERGENT FIELD ** 56.50 DBA **

SYSTEM PARAMETERS FOR OSU-NP-4
HORSE POWER = 7.0 JHP
PRESSURE=2000PSI   INLET= 0PSI   SPEED= 600RPM   FLOW RATE= 6.0G   TEMPERATURE=38.0C

92

Main Program

PULSY

For

FBN Data Reduction

93

```
      DIMENSION A(21,9),PJB(21,10),PRB(21,10),C(21),P(21),
     1AP2(21),AP3(21),CP(21),UP(21)
      DOUBLE PRECISION A,PJB,PRB,C,P,AP2,AP3,CP,DB,UP,TP,DB1,DBA
C
C     ----------------------------------------------------------------
C     READ THE 21 1/3 OCTAVE CENTER FREQUENCIES
C     TO BE USED IN THIS PROGRAM
C     ----------------------------------------------------------------
C
      READ(5,20)(A(I,1),I=1,21)
   20 FORMAT(7F10.1)
      CONTINUE
C
C     ----------------------------------------------------------------
C     THE NEXT 21 NUMBERS ARE THE CORRECTION FACTORS
C     USED TO CONVERT TO DBA
C     ----------------------------------------------------------------
C
      READ(5,20)(C(I),I=1,21)
      CONTINUE
C
C     ----------------------------------------------------------------
C     READ IN THE NUMBER OF MEASURMENTS TO BE AVERAGED--( N
C     MEASURMENTS FOR THE PRESSURE SOURCE, M FOR THE
C     BACKGROUND NOISE, FORMAT(2I5)
C     ----------------------------------------------------------------
C
      READ(5,10)N,M
   10 FORMAT(2I5)
C
C     ----------------------------------------------------------------
C     READ IN THE TRANSDUCER CORRECTION FACTOR
C     FORMAT(F10.2)
C     ----------------------------------------------------------------
C
      READ(5,11)TX
   11 FORMAT(F10.2)
C
C     ----------------------------------------------------------------
C     READ IN THE VALUES FOR THE FLUID POWER SYSTEM PARA-
C     METERS.   NP=PUMP NUMBER, NPR=PUMP OUTLET PRESSURE,
C     IP=INLET PRESSURE, NS=SYSTEM RPM, FR= FLOW RATE,
C     TEM=SYSTEM TEMPERATURE
C     ----------------------------------------------------------------
      READ(5,12)NP
      READ(5,12)NPR
      READ(5,12)IP
      READ(5,12)NS
      READ(5,11)FR
      READ(5,11)TEM
   12 FORMAT(I5)
      TP=NSP
      PQR=(((IP+NPR)/1714.)
C
C     ----------------------------------------------------------------
C     READ IN THE MEASURED VALUES FOR THE PRESSURE SOURCE
C     FORMAT(7F10.1)
C     ----------------------------------------------------------------
```

```
C                                                              00000850
      READ(5,20)((PUB(I,J),I=1,21),J=1,N)                      00000860
C                                                              00000880
C                                                              00000890
C      -------------------------------------------------       00000890
C      FIND THE AVERAGE OF N MEASUREMENTS FOR EACH 1/3 OCTAVE  00000900
C      BAND FOR THE PRESSURE SOURCE                            00000910
C      -------------------------------------------------       03030920
C                                                              00000930
      DO 40 I=1,21                                             00000940
      AV=0.0                                                   00000950
      DO 30 J=1,N                                              03000960
      AV=AV+PUB(I,J)                                           00000970
   30 CONTINUE                                                 00C00980
      A(I,2)=AV/N                                              00000990
   40 CONTINUE                                                 00001000
C                                                              00001010
C      -------------------------------------------------       00001020
C      READ IN THE MEASURED VALUES FOR THE BACKGROUND,         00001030
C      FORMAT(7F10.1)                                          0^001040
C      -------------------------------------------------       00001050
C                                                              00001060
      READ(5,20)((PRB(I,J),I=1,21),J=1,M)                      00001070
C                                                              00001080
C      -------------------------------------------------       00001090
C      FIND THE AVERAGE OF M MEASUREMENTS FOR EACH 1/3 OCTAVE  03001100
C      BAND FOR THE BACKGROUND                                 00001110
C      -------------------------------------------------       00001120
C                                                              00001130
      DO 70 I=1,21                                             00001140
      AB=0.0                                                   00001150
      DO 60 J=1,M                                              00001160
      AB=AB+PRB(I,J)                                           00001170
   60 CONTINUE                                                 00001180
      A(I,3)=AB/M                                              00001190
   70 CONTINUE                                                 00001200
      DO 80 I=1,21                                             00001210
C                                                              00001220
C      -------------------------------------------------       00001230
C      CORRECT THE PRESSURE SOURCE WITH THE BACKGROUND         00001240
C      -------------------------------------------------       00001250
      AP2(I)=10.**((A(I,2)-74.)/10.)                           00001260
      AP3(I)=10.**((A(I,3)-74.)/10.)                           00001270
      CP(I)=AP2(I)-AP3(I)                                      00001280
      IF(AP3(I).GE.AP2(I))CP(I)=1/10.**3.5                     00001290
C                                                              00001300
C      -------------------------------------------------       00001310
C      COMPUTE THE CORRECTED PRESSURE LEVELS                   00001320
C      -------------------------------------------------       00001330
C                                                              00001340
      A(I,4)=10.*DLOG10(CP(I))+74.                             00001350
C                                                              00001360
C      -------------------------------------------------       00001370
C      COMPUTE THE "A" WEIGHTED PRESSURE LEVELS                00001380
C      -------------------------------------------------       00001390
C                                                              00001400
      A(I,5)=A(I,4)+C(I)                                       00001410
C                                                              00001420
C      -------------------------------------------------       00001430
```

95

```
C       COMPUTE THE POWER ASSOCIATED WITH THE "A" WEIGHTED          00001440
C       PRESSURE LEVELS                                             00001450
C       ------------------------------------------------------      00001460
C                                                                   00001470
        A(I,6)=(10.**(A(I,5)/10.))*(1./10.**12.)                    00001480
C                                                                   00001490
C       ------------------------------------------------------      00001500
C       COMPUTE THE POWER ASSOCIATED WITH THE UNWEIGHTED            00001510
C       PRESSURE LEVELS                                             00001520
C       ------------------------------------------------------      00001530
C                                                                   00001540
        UP(I)=10.**((A(I,4)-74.)/10.)                               00001550
C                                                                   00001560
C       ------------------------------------------------------      00001570
C       COMPUTE THE "A" WEIGHTED PRESSURE LEVELS RELATIVE TO        00001580
C       20 MN/M**2                                                  00001590
C       ------------------------------------------------------      00001600
C                                                                   00001610
        A(I,7)=A(I,5)+TX                                            00001620
        A(I,8)=A(I,1)                                               00001630
     80 CONTINUE                                                    00001640
        TP=0.0                                                      00001650
        DB=0.0                                                      00001660
        DO 90 I=1,21                                                00001670
        DB=DB+A(I,6)                                                00001680
        TP=TP+CP(I)                                                 00001690
     90 CONTINUE                                                    00001700
C                                                                   00001710
C       ------------------------------------------------------      00001720
C       COMPUTE THE TOTAL UNWEIGHTED PRESSURE LEVEL                 00001730
C       ------------------------------------------------------      00001740
C                                                                   00001750
        DB1=10.*DLOG10(TP)+74.                                      00001760
C                                                                   00001770
C       ------------------------------------------------------      00001780
C       COMPUTE THE TOTAL "A" WEIGHTED PRESSURE LEVEL               00001790
C       ------------------------------------------------------      00001800
C                                                                   00001810
        DBA=10.*DLOG10(DB*(10.**12.))                               00001820
C                                                                   00001830
C       ------------------------------------------------------      00001840
C       COMPUTE THE TOTAL "A" WEIGHTED PRESSURE LEVEL RELATIVE      00001850
C       TO 20 MN/M**2                                               00001860
C       ------------------------------------------------------      00001870
C                                                                   00001880
        DBA2=DBA+TX                                                 00001890
C                                                                   00001900
C       ------------------------------------------------------      00001910
C       PRINT THE OUTPUT TABLE                                      00001920
C       ------------------------------------------------------      00001930
        WRITE(6,169)                                                00001940
        WRITE(6,120)                                                00001950
        WRITE(6,130)                                                00001960
        WRITE(6,150)                                                00001970
        WRITE(6,140)                                                00001980
        WRITE(6,150)                                                00001990
        WRITE(6,100)((A(I,J),J=1,8),I=1,21)                         00002000
        WRITE(6,150)                                                00002010
```

96

```
      WRITE(6,101)DB1                                              00002020
      WRITE(6,102)DBA                                              00002030
                                                                  00002040
C                                                                 00002050
      WRITE(6,103)DB                                              00002060
      WRITE(6,104)DBA2                                            00002070
      WRITE(6,150)                                                00002080
      WRITE(6,170)NP                                              00002085
      WRITE(6,105)POR                                             00002090
      WRITE(6,175)NPR,IP,NS,FR,TEM                                00002100
      WRITE(6,150)                                                00002110
      WRITE(6,169)                                                00002120
100 FORMAT(1X,F6.0,4F10.2,4X,D8.2,F10.2,F11.0)                    00002130
101 FORMAT(1X,30HTOTAL PRESSURE ---------------,F6.2,1X,2HDB)     00002140
102 FORMAT(1X,40H"A" WEIGHTED PRESSURE -------------------,F6.2,4H DBA)00002140
103 FORMAT(1X,49HTOTAL "A" WEIGHTED POWER ------------------------, 00002150
   1D8.2)                                                         00002160
104 FORMAT(1X,61H"A" WEIGHTED PRESSURE RELATIVE TO 20 MN/M**2 --------03002170
   1--------,F7.2,4H DBA)                                         00002180
105 FORMAT(32X,12HHORSE POWER=,F6.2,2HHP)                         00002185
110 FORMAT(4F10.3)                                                00002190
120 FORMAT(37X,8HOSU-FPRC)                                        00002200
130 FORMAT(26X,29HACOUSTICS LABORATORY DATA LOG)                  00002210
140 FORMAT(2X,4HFREQ,6X,5HPRESS,6X,3HBKG,6X,4HCORR,7X,3H"A",6X,   00002220
   15HPOWER,6X,6HREL-20,6X,4HFREQ)                                00002230
150 FORMAT(80H ===================================================00002240
   1=====================)                                        00002250
                                                                  00002260
169 FORMAT(/////)                                                 00002270
170 FORMAT(25X,29HSYSTEM PARAMETERS FOR OSU-NP-,I2)               00002280
175 FORMAT(1X,9HPRESSURE=,I4,3HPSI,2X,6HINLET=,I1,3HPSI,2X,       00002290
   16HSPEED=,I4,3HRPM,2X,10HFLOW RATE=,F4.1,1HG,2X,               00002300
   712HTEMPERATURE=,F4.1,1HC)                                     00002310
      STOP                                                        00002320
      END
```

97

- DATA FILE STRUCTURE FOR FLUID-BORNE NOISE WITH PARAMETERS

LISTED IN ORDER OF OCCURRENCE IN DATA FILE -

A(I,1)   The 21 third-octave center frequencies to be used in
                the program (7F10.1).

C(I,1)   The 21 correction factors to convert dB to dBA.

N, M   N - The number of sets of unknown source measurements
                    to be averaged.

                M - The number of instrumentation background noise
                    measurements to be averaged (2I5).

TX   Transducer correction factor (I5).

NP   Pump identification number (I5).

NPR   System pressure (I5).

IP

NS   System rpm (I5).

FR   Flow rate in gpm (F5.1).

TEM   System temperature (F5.1).

PUB(I,N)   The N sets of 21 measured values for the unknown noise
                source.

PRB(I,M)   The M sets of 21 measured values for the background noise
                measurements.

98

TABLE E-4: Data File FBN.

```
00000060   100.    125.    160.    200.    250.    315.    400.
00000070   500.    630.    800.   1000.   1250.   1600.   2000.
00000080  2500.   3150.   4000.   5000.   6300.   8000.  10000.
00000090  -19.1   -16.1   -13.2   -10.8    -8.6    -6.5    -4.8
00000100   -3.3    -1.9    -0.8     0.0     0.5     1.0     1.2
00000110    1.2     1.2     1.0     0.5    -0.2    -1.1    -2.4
00000120   124.    1
00000130     1
00000140     3
00000150   200
00000160     0
00000170   600
00000180    6.8
00000190   38.0
00000200   74.3    61.2    57.3    59.     49.8    53.2    52.9
00000210   42.5    41.6    39.     42.4    42.1    39.     39.6
00000220   39.     39.     39.     39.     39.     39.     40.4
00000230   39.     39.     51.2    51.4    44.4    52.1    44.7
00000240   39.     39.     39.     39.     39.     39.     39.
00000250   39.     39.     39.     39.     39.     39.     39.
00000270   //
```

TABLE E-5: FBN Sample Output.

OSU-FPRC
ACOUSTICS LABORATORY DATA LOG

FREQ	PRESS	BKG	CORR	"A"	POWER	REL-20	FREQ
100.	74.30	39.00	74.30	55.20	0.330-06	179.20	100.
125.	61.20	39.00	61.17	45.07	0.320-07	169.07	125.
160.	57.30	51.20	56.08	42.88	0.190-07	165.88	160.
200.	59.00	51.40	58.17	47.37	0.550-07	171.37	200.
250.	46.80	44.40	48.32	39.72	0.940-03	163.72	250.
315.	53.20	52.10	46.70	40.20	0.100-07	164.20	315.
400.	52.90	44.70	52.19	47.39	0.550-07	171.39	400.
500.	42.50	36.00	39.93	36.63	0.460-08	160.63	500.
630.	41.60	39.00	38.14	36.24	0.420-08	160.24	630.
800.	39.00	39.00	39.00	38.20	0.660-08	162.20	800.
1000.	42.40	39.00	39.75	39.75	0.940-08	163.75	1000.
1250.	42.10	39.00	39.18	39.68	0.930-08	163.68	1250.
1600.	39.00	39.00	39.00	40.00	0.100-07	164.00	1600.
2000.	39.50	39.00	30.71	31.91	0.160-08	155.91	2000.
2500.	39.00	39.00	39.00	40.20	0.100-07	164.20	2500.
3150.	39.00	39.00	39.00	40.20	0.100-07	164.20	3150.
4000.	39.00	39.00	39.00	40.00	0.100-07	164.00	4000.
5000.	39.00	39.00	39.50	39.50	0.890-08	163.50	5000.
6300.	34.00	39.00	39.00	38.80	0.760-08	162.80	6300.
8000.	39.00	39.00	39.00	37.90	0.620-08	161.90	8000.
10000.	40.40	39.00	34.80	32.40	0.170-08	156.40	10000.

TOTAL PRESSURE ------------- 74.72 DB
"A" WEIGHTED PRESSURE --------- 57.87 DBA
TOTAL "A" WEIGHTED POWER ----------- 0.610-06
"A" WEIGHTED PRESSURE RELATIVE TO 20 UN/M**2 ----------- 181.87 DBA

SYSTEM PARAMETERS FOR OSU-NP- 3
HORSE POWER= 0.79HP

PRESSURE= 200PSI INLET=0PSI SPEED=600RPM FLOW RATE= 6.86 TEMPERATURE=35.00

100

Main Program

SHAKY

For

SBN Data Reduction

101

```
      DIMENSION A(21,10),VUB(21,10),VRB(21,10),C(21),DB(21),            00000050
     1AP2(21),AP3(21),CP(21),UP(21)                                     00000060
      DOUBLE PRECISION A,VUB,VRB,C,AP2,AP3,CP,DB,UP,TP,DB1,DBA,         00000070
     1AC,VE,DI                                                          00000080
C                                                                       00000090
C     ----------------------------------------------------------       00000100
C     READ THE 21 1/3 OCTAVE CENTER FREQUENCIES TO BE                   00000110
C     USED IN THIS PROGRAM.   FORMAT(7F10.1)                           00000120
C     ----------------------------------------------------------       00000130
C                                                                       00000140
      READ(5,20)(A(I,1),I=1,21)                                         00000150
   20 FORMAT(7F10.1)                                                    00000160
      CONTINUE                                                          00000170
C                                                                       00000630
C     ----------------------------------------------------------       00000640
C     READ IN THE NUMBER OF MEASURMENTS TO BE AVERAGED--( N            00000650
C     MEASURMENTS FOR THE VIBRATION SOURCE, M FOR THE                  00000660
C     BACKGROUND NOISE, FORMAT(2I5)                                     00000670
C     ----------------------------------------------------------       00000680
C                                                                       00000690
      READ(5,10)N,M                                                     00000691
   10 FORMAT(2I5)                                                       00000692
C                                                                       00000693
C     ----------------------------------------------------------       00000694
C     READ IN THE "VOLTAGE TO ACCELERATION" TRANSDUCER                 00000695
C     CORRECTION FACTOR (F10.8)                                         00000696
C     ----------------------------------------------------------       00000697
C                                                                       00000698
      READ(5,99)TX                                                      00000699
   99 FORMAT(F10.8)                                                     00000701
C                                                                       00000711
C     ----------------------------------------------------------       00000712
C     READ IN THE SYSTEM PARAMETERS.  NP=PUMP NUMBER,                  00000713
C     NPR=SYSTEM OUTLET PRESSURE, IP=SYSTEM INLET PRESSURE,            00000714
C     NS=SYSTEM RPM, FR=SYSTEM FLOW RATE, TEM=SYSTEM                   00000715
C     TEMPERATURE                                                       00000716
C     ----------------------------------------------------------       00000717
C                                                                       00000718
      READ(5,12)NP                                                      00000720
      READ(5,12)NPR                                                     00000730
      READ(5,12)IP                                                      00000740
      READ(5,12)NS                                                      00000750
      READ(5,11)FR                                                      00000760
      READ(5,11)TEM                                                     00000770
   11 FORMAT(F5.1)                                                      00000780
   12 FORMAT(I5)                                                        00000790
C                                                                       00000800
C     ----------------------------------------------------------       00000810
C     READ IN THE MEASURED VALUES FOR THE VIBRATION SOURCE            00000820
C     FORMAT(7F10.1)                                                    00000830
C     ----------------------------------------------------------       00000840
C                                                                       00000850
      READ(5,20)((VUB(I,J),I=1,21),J=1,N)                              00000860
C                                                                       00000880
C     ----------------------------------------------------------       00000890
C     FIND THE AVERAGE OF N MEASURMENTS FOR EACH 1/3 OCTAVE           00000900
C     BAND FOR THE VIBRATION SOURCE                                    00000910
C     ----------------------------------------------------------       00000920
```

```
C                                                              00000930
      DO 40 I=1,21                                             00000940
      AV=0.0                                                   00000950
      DO 30 J=1,N                                              00000960
      AV=AV+VUB(I,J)                                           00000970
   30 CONTINUE                                                 00000980
      A(I,2)=AV/N                                              00000990
   40 CONTINUE                                                 00001000
C                                                              00001010
C     --------------------------------------------------------00001020
C     READ IN THE MEASURED VALUES FOR THE BACKGROUND,         00001030
C     FORMAT(7F10.1)                                          00001040
C     --------------------------------------------------------00001050
C                                                              00001060
      READ(5,20)((VRB(I,J),I=1,21),J=1,M)                      00001070
C                                                              00001080
C     --------------------------------------------------------00001090
C     FIND THE AVERAGE OF M MEASUREMENTS FOR EACH 1/3 OCTAVE   00001100
C     BAND FOR THE BACKGROUND                                 00001110
C     --------------------------------------------------------00001120
C                                                              00001130
      DO 70 I=1,21                                             00001140
      AB=0.0                                                   00001150
      DO 60 J=1,M                                              00001160
      AB=AB+VRB(I,J)                                           00001170
   60 CONTINUE                                                 00001180
      CB(I)=AB/M                                               00001190
   70 CONTINUE                                                 00001200
C                                                              00001201
C     --------------------------------------------------------00001202
C                                                              00001202
C     READ IN THE TRANSDUCER CORRECTION FACTORS AT            00001203
C     EACH 1/3 OCTAVE CENTER FREQUENCY                        00001204
C     --------------------------------------------------------00001205
C                                                              00001206
      READ(5,20)(UP(I),I=1,21)                                 00001210
C                                                              00001211
C     --------------------------------------------------------00001212
C     COMPUTE THE ACCELERATION, VELOCITY, AND                 00001213
C     DISPLACEMENT                                            00001214
C     --------------------------------------------------------00001215
C                                                              00001216
      DO 80 I=1,21                                             00001220
      AP2(I)=(5./10.**6)*(10.**(A(I,2)/20.))                   00001230
      AP3(I)=(5./10.**6)*(10.**(CB(I)/20.))                    00001240
      CP(I)=AP2(I)-AP3(I)+UP(I)*(AP2(I)-AP3(I))                00001250
      IF(AP3(I).GE.AP2(I))CP(I)=1./10.**3.5                    00001255
      A(I,3)=CP(I)/TX                                          00001260
      A(I,5)=A(I,3)/A(I,1)                                     00001270
      A(I,7)=A(I,5)/A(I,1)                                     00001280
      A(I,4)=20.*(DLOG10(A(I,3))+5.)                           00001290
      A(I,6)=20.*(DLOG10(A(I,5))+8.)                           00001300
      A(I,8)=20.*(DLOG10(A(I,7))+11.)                          00001310
      A(I,9)=A(I,1)                                            00001320
   80 CONTINUE                                                 00001330
      AC=0.0                                                   00001340
      VE=0.0                                                   00001350
      DI=0.0                                                   00001360
      DO 81 I=1,21                                             00001370
```

103

```
      AC =AC +A( 1 ,3)                                                   00001380
      VE =VE +A( 1 ,5)                                                   00001390
      DI =DI +A( 1 ,7)                                                   00001400
   81 CONTINUE                                                          00001410
      ACC=20.*(DLOG10(AC)+5.)                                          00001420
      VEL=20.*(DLOG10(VE)+8.)                                          00001430
      DIS=20.*(DLOG10(DI)+11.)                                         00001440
      WRITE(6,169)                                                      00001480
      WRITE(6,120)                                                      00001490
      WRITE(6,130)                                                      00001500
      WRITE(6,150)                                                      00001510
      WRITE(6,140)                                                      00001520
      WRITE(6,101)                                                      00001530
      WRITE(6,150)                                                      00001540
      WRITE(6,100)((A(1,J),J=1,7),I=1,21)                              00001550
      WRITE(6,150)                                                      00001560
      WRITE(6,90)ACC,VEL,DIS                                          00001570
      WRITE(6,95)AC,VE,DI                                            00001580
      WRITE(6,150)                                                      00001590
      WRITE(6,170)NP                                                    00001600
      WRITE(6,175)NPP,IP,NS,FR,TEM                                     00001610
      WRITE(6,150)                                                      00001620
      WRITE(6,169)                                                      00001630
   90 FORMAT(1X,17HTOTAL LEVELS (DB),9X,F5.1,13X,F6.1,13X,F6.1)        00001640
   95 FORMAT(1X,12HTOTAL LEVELS,5X,E8.2,11X,E8.2,11X,F8.2)            00001650
  100 FORMAT (1X,F6.0,F7.1,F12.2,F7.1,E12.2,F7.1,E12.2,F7.1,F9.0)      00001660
  101 FORMAT(10X,2HDB,6X,6HM/S**2,5X,2HDB,7X,3HM/S,7X,2HDB,8X,1HM,8X,2HD00001670
     1H)                                                                00001580
  120 FORMAT(37X,8HOSU-FPRC)                                           00001690
  130 FORMAT(26X,29HACOUSTICS LABORATORY DATA LOG)                     00001700
  140 FORMAT(2X,4HFREQ,3X,5HINPUT,5X,12HACCELERATION,8X,8HVELOCITY,9X,1200001710
     1HDISPLACEMENT,6X,4HFREQ)                                         00001720
  150 FORMAT(8CH ****************************************************00001730
     1****************************)                                    00001740
  169 FORMAT(////)                                                     00001750
  170 FORMAT(25X,29HSYSTEM PARAMETERS FOR OSU-NP-,I2)                  00001760
  175 FORMAT(1X,9HPRESSURE=,I4,3HPSI,2X,6HINLET=,I1,3HPSI,2X,         00001770
     16HSPEED=,I4,3HRPM,2X,10HFLOW RATE=,F4.1,1HG,2X,                  00001780
     212HTEMPERATURE=,F4.1,1HC)                                        00001790
      STOP                                                             00001800
      END                                                             00001810
```

104

- DATA FILE STRUCTURE FOR STRUCTURE-BORNE NOISE WITH PARAMETERS

LISTED IN ORDER OF OCCURRENCE IN DATA FILE -

A(I, 1)   The 21 third-octave center frequencies to be used (7F10.1).

N, M   N - The number of sets of unknown noise source measurements
                   to be averaged.

               M - The number of sets of instrumentation background noise
                   to be averaged (2I5).

NP   Pump identification number (I5).

NPR   System pressure (I5).

IP

NS   System rpm (I5).

FR   Flow rate in gpm (F5.1).

TEM   System temperature (F5.1).

VUB(I,N)   The N sets of 21 measured values for the unknown source
               (7F10.1).

VBR(I,M)   The M sets of 21 instrumentation background noise measure-
               ments (7F10.1).

UP(I)   The 21 transducer correction factors.

TABLE E-6: Data File SBN.

Line							
00000060	110.	125.	160.	200.	250.	315.	460.
00000070	500.	630.	800.	1000.	1250.	1600.	2000.
00000080	2500.	3150.	4000.	5000.	6300.	8000.	10000.
00000090	1	1					
00000100	.0075	9184					
00000110	52						
00000120	.2000						
00000130	5						
00000140	1985						
00000150	60.0						
00000160	65.5						
00000170	47.9	50.2	57.1	58.0	55.7	56.0	48.3
00000180	49.1	49.1	48.2	48.1	51.5	50.3	48.1
00000190	48.8	52.8	53.4	55.9	64.2	65.7	68.2
00000200	50.7	54.8	54.1	53.8	51.8	54.2	46.5
00000210	46.	46.	45.7	45.8	46.6	46.1	46.7
00000220	45.7	46.	46.8	46.	46.5	46.1	46.3
00000230	0.0	0.0	0.0	0.0	-.0035	-.0064	-.01
00000240	-.0118	-.0145	-.0175	-.02	-.0177	-.006	-.0
00000250	.0065	.013	.02	.026	.0325	.039	.045
00000270	//						

TABLE E-7: SBN Sample Output.

```
                              OSU-FPRC
                   ACOUSTICS LABORATORY DATA LOG
************************************************************************
FREQ  INPUT   ACCELERATION       VELOCITY          DISPLACEMENT      FREQ
       DB     M/S**2    DB       M/S      DB        M         DB
************************************************************************
  110.  47.9  0.42D-01  72.4   0.38D-03  91.6    0.34D-05  110.7    110.
  125.  50.2  0.42D-01  72.4   0.33D-03  90.5    0.27D-05  108.5    125.
  160.  57.1  0.14D 00  82.8   0.86D-03  98.7    0.54D-05  114.6    150.
  200.  58.0  0.20D 00  86.0   0.10D-02 100.0    0.50D-05  114.0    200.
  250.  55.7  0.14D 00  83.2   0.58D-03  95.3    0.23D-05  107.3    250.
  315.  56.0  0.77D-01  77.8   0.25D-03  87.8    0.78D-06   97.8    315.
  400.  48.3  0.32D-01  70.0   0.79D-04  78.0    0.20D-06   85.9    400.
  500.  49.1  0.56D-01  74.9   0.11D-03  80.9    0.22D-06   87.0    500.
  630.  49.1  0.56D-01  74.9   0.88D-04  78.9    0.14D-06   82.9    630.
  800.  48.2  0.42D-01  72.4   0.52D-04  74.3    0.65D-07   76.3    800.
 1000.  48.1  0.38D-01  71.6   0.38D-04  71.6    0.38D-07   71.6   1000.
 1250.  51.5  0.10D 00  80.4   0.84D-04  78.5    0.67D-07   76.5   1250.
 1600.  50.3  0.82D-01  78.3   0.51D-04  74.2    0.32D-07   70.1   1600.
 2000.  48.1  0.25D-01  67.9   0.12D-04  61.8    0.62D-08   55.9   2000.
 2500.  48.8  0.55D-01  74.8   0.22D-04  66.8    0.88D-08   58.9   2500.
 3150.  52.8  0.16D 00  84.0   0.50D-04  74.0    0.16D-07   64.0   3150.
 4000.  53.4  0.17D 00  84.5   0.42D-04  72.4    0.10D-07   60.4   4000.
 5000.  55.0  0.29D 00  89.1   0.57D-04  75.2    0.11D-07   61.2   5000.
 6300.  64.2  0.96D 00  99.6   0.15D-03  83.7    0.24D-07   67.7   6300.
 8000.  65.7  0.12D 01 101.4   0.15D-03  83.4    0.18D-07   65.3   8000.
10000.  68.2  0.16D 01 104.2   0.16D-03  84.2    0.16D-07   64.2  10000.
************************************************************************
TOTAL LEVELS (DB)      114.8            113.2              126.2
TOTAL LEVELS  0.55D 01           0.46D-02           0.20D-04
************************************************************************
        SYSTEM PARAMETERS FOR OSU-NP-52
PRESSURE=2000PSI  INLET=5PSI  SPEED=1985RPM  FLOW RATE=60.0G  TEMPERATURE=65.5C
************************************************************************
```

Disc Load and Call Routines

For

Oklahoma State University Computer System

109

```
00000010 //NOISE*** JOB (                    ,1),'NOISE',MSGLEVEL=(0,0),
00000011 //   CLASS=B
00000020 /*ROUTE PRINT RJO
00000030 // EXEC FORTHCL
00000040 //FORT.SYSIN DD *
00000050      DIMENSION
```

MAIN PROGRAM

```
00002480      END
00002490 //LKED.SYSLMOD DD DSNAME=OSU.ACT12687.FPRC,DISP=OLD
00002500 //LKED.SYSIN DD *
00002510    NAME DRA(R)
00002520 //
```

CALLING PROGRAM AND DATA

```
00000010 //DRAXXXXX JOB (                    ,1),'ELLIOTT',MSGLEVEL=(0,0)
00000020 /*ROUTE PRINT RJO
00000030 // EXEC PGM=DRA
00000040 //STEPLIB DD DSNAME=OSU.ACT12687.FPRC,DISP=SHR
00000050 //FT05F001 DD *
00000060    1    1
00000070    10   200   0 2000 26.8 38.0
00000080 57.3      62.7      56.8      59.9      74.2      66.8      61.3
00000090 63.9      71.1      71.4      64.8      59.       58.2      56.7
00000100 58.6      57.       56.9      57.3      58.3      59.       56.3
00000110 68.7      71.7      72.8      75.9      75.7      75.7      74.7
00000120 73.3      73.7      74.2      74.2      74.7      75.1      74.9
00000130 75.2      74.9      73.6      73.1      73.3      72.9      67.3
00000140 61.7      64.5      63.5      70.9      86.       78.8      68.
00000150 77.9      74.2      81.8      80.3      78.8      71.       69.8
00000160 69.5      66.       68.7      69.8      70.3      69.       64.3
00000170 20.       21.5      24.       26.       28.       29.5      32.5
00000180 34.5      34.5      34.5      34.5      34.5      34.5      34.5
00000190 34.5      34.5      36.       39.       42.       44.5      47.
00000200 52.2      56.2      57.       49.       50.       53.9      58.3
00000210 57.6      54.5      54.       51.2      50.3      51.       48.2
00000220 51.9      49.       46.6      45.       45.2      45.8      41.7
00000230 47.2      39.       39.       39.       39.       39.       39.
00000240 39.       39.       39.       39.       39.       39.       39.
00000250 39.       39.       39.       39.       39.       39.       39.
00000260 72.       72.       74.       76.3      77.       77.3      75.7
00000270 74.       74.       74.2      74.3      75.       75.       74.9
00000280 75.1      74.5      73.1      72.6      72.8      72.4      66.7
00000290 60.8      69.       63.1      56.7      61.1      60.6      58.
00000300 61.6      59.       63.8      59.       57.6      63.8      54.8
00000310 54.8      54.6      48.8      50.2      48.2      45.7      43.5
00000320 61.2      66.6      64.2      71.5      75.8      70.       71.3
00000330 83.6      76.3      78.2      78.7      76.1      73.2      73.3
00000340 72.3      69.       69.6      75.1      75.2      72.9      65.7
00000350 48.3      48.6      43.3      43.6      39.       39.       39.
00000360 39.       39.       39.       39.       39.       39.       39.
00000370 39.       39.       39.       39.       39.       39.       39.
00000380 70.9      73.1      73.5      75.6      75.8      76.4      74.9
00000390 73.6      74.2      74.6      74.6      75.2      75.3      75.
00000400 75.3      75.2      74.       73.8      74.2      73.8      68.3
00000410 //FT06F001 DD SYSOUT=A
00000420 //
```

110

APPENDIX F

TEST CODE FOR MEASURING AND REPORTING SOUND

GENERATED BY HYDRAULIC PUMPS

NOTE: This document represents the project staff's interpretation of the guidelines outlined at the May 1973 meeting of ISO/TC 131/ SC8/WG1. Supplementary information has been added, when it was thought that such information would help to clarify the intent of the document. A draft document from ISO/TC 131/SC8/WG1 should be completed by mid-1974.

C O N T E N T S

TEST CODE FOR MEASURING AND REPORTING SOUND
GENERATED BY HYDRAULIC PUMPS

1.0 INTRODUCTION[1]

In hydraulic fluid power systems, power is transmitted and controll-
ed through a liquid under pressure within an enclosed circuit. Pumps
convert mechanical power into hydraulic fluid power. Some noise is created
during the power conversion process. The sound level which results be-
cause of noise emitted by the pump is an important consideration in com-
ponent selection.

2.0 SCOPE

To prescribe procedures for the determination of the sound power
level of a hydraulic pump under controlled conditions of installation
and operation suitable for providing a basis for comparing the airborne
noise levels of pumps:

   2.1   in terms of A-weighted sound power level.
   2.2   in terms of octave-band, sound-power levels. For
         general purposes, the frequency range of interest
         includes the octave bands with center frequencies
         from 125 to 8000 Hz.
   2.3   excludes the determination of directivity characteristics
         of the acoustic radiations.

3.0 FIELD OF APPLICATION

This document is applicable to all types of hydraulic fluid power
pumps operating under stated steady-state conditions, irrespective of
size except for limitation imposed by size of test environment.

4.0 MEASUREMENT UNCERTAINTY

Measurements made in accordance with this international standard
tend to result in standard deviations which are equal to or less than
those given in Table I. The standard deviations taken into account the
cumulative effect of all causes of measurement uncertainty, excluding
variations in the sound power of the source from test to test. For a
source which emits noise with a relatively flat spectrum in the 100 to
10,000 Hz frequency range, the A-weighted sound power level is determined
with a standard deviation not more than 2 dBa.

5.0 TERMS AND DEFINITIONS[2]

---

[1]Text will be modified by WG1   [2]To be completed by WG1

TABLE I: STANDARD DEVIATION (IN dB) OF SOUND POWER LEVEL DETERMINATION

Test Environment (See Section 8)	Grade of Measurement	Octave Band f_m				
		125	250	500	1000–4000	8000
Anechoic	Precision	1.0	1.0	1.0	0.5	1.0
Semi-Anechoic	Precision	1.5	1.5	1.5	1.0	1.5
Reverberant	Precision	3.0	2.0	1.5	1.5	3.0
Semi-Anechoic	Engineering	3.0	2.0	2.0	1.5	2.5
Semi-Reverberant	Engineering	5.0	3.0	2.0	2.0	3.0

TABLE II: DOCUMENTS TO BE USED FOR TEST FACILITY PERFORMANCE QUALIFICATION

Environment in Facility	Grade of Measurement	Applicable Document
Anechoic	Precision	Annex A of DISxxx (Part V document)
Semi-Anechoic	Precision	Annex A of DISxxx (Part V document)
Reverberant	Precision	See Annex to DIS 2946
Semi-Anechoic	Engineering	Annex A of DISxxxx Part IV
Semi-Reverberant	Engineering	See Section 3 of DISxxxxx (part III document

6.0 SYMBOLS[1]

7.0 REFERENCES[1]

8.0 TEST ENVIRONMENT

Tests are to be made using one of the acoustical environments listed in Table II. The test facility must meet the measurement performance requirements (standard deviation limits) indicated in the appropriate document.

9.0 INSTRUMENTATION

9.1 Instrumentation to measure oil flow, oil pressure, pump speed, and oil temperature is to be in accordance with the proposed SCb pump testing document for 'industrial class' accuracy of testing.

9.2 Instrumentation of the acoustical measurements shall comply with Section 4 of the ISO/TC 43 documents on the "Determination of Sound Power Emitted By Noise Sources."

10.0 INSTALLATION

10.1 The hydraulic circuit is to include oil filter, oil cooler, and reservoir and restrictor valves as required to meet the pump hydraulic test conditions.

10.2 The test fluid and filtration level shall be in accordance with manufacturer's recommendations.

10.3 Inlet and discharge line diameters shall be to the manufacturer's recommended installation practice.

10.4 Exercise extra care in assembling inlet lines to prevent air leakage into the circuit.

10.5 Locate inlet restrictor valves required as far as is practical upstream of the pump to minimize aeration to pump inlet port.

10.6 Locate the inlet pressure gauge at the same height as the inlet fitting or calibrate gauge for height difference.

11.0 MECHANICAL EQUIPMENT

11.1 Wrap all fluid lines and load valves in the test space with acoustical barrier material as desired. A suitable material will have at least 10 dB transmission loss at 100 Hz and higher frequencies.

115

11.2 Locate the drive motor outside the test space and drive the
pump through a long shaft or isolate the motor in an enclosure.
Construct the pump mounting so that it will minimize the sound
radiated by it due to pump vibrations. Vibration isolation
techniques can be employed even if the pump is usually solidly
mounted.

11.4 The size of flange mountings shall be as small as practical
to minimize interference with radiation of sound towards the
shaft end of the pump.

12.0 OPERATING CONDITIONS & TEST PROCEDURE

12.1 Background Measurements

12.1.1 Disconnect the drive shaft coupling at the pump.

12.1.2 Operate the pump drive system at the speeds at
which pump will be tested.

12.1.3 Obtain the background mean levels in each octave
band of interest and the "A" weighted total level
or linear total level in dB.
NOTE: It is recommended that the background levels
be obtained while the system is operating under test
conditions with the pump covered by a sound isolator
with a noticeable transmission loss. If, after pro-
perly covering the pump, the recorder sound level
does not noticeably decrease, then it is highly pro-
bable that the measured level is not associated with
the pump, and the test should be rejected.

12.2 Pump Measurements

12.2.1 Connect the pump drive coupling.

12.2.2 The pump should be operated for a sufficient time to
purge air from the system.

12.2.3 Operate the pump at conditions specified for the
test. Stabilize all variables including fluid
condition. Maintain conditions within limits spe-
cified in Table III.

TABLE III

Test Parameter	Maintain Within+
Flow	2%
Pressure	2%
Speed	2%
Temperature	3°C.

12.2.4 Measure temperatures and pressures at pump inlet and discharge fittings or at test station provided by manufacturer.

12.2.5 Measure pump mean sound pressure levels in each octave of interest and the "A" weighted total level or linear total level in dB.

12.2.6 Near the end of a test series or after one hour of testing, repeat the conditions run early in the series. Invalidate the test series if the measured sound level does not duplicate that of the earlier test within 2 dBA, uncorrected.
NOTE: Some pumps must wear-in before their sound levels become stabilized. Step 12.2.6 is only necessary with new or rebuilt pumps.

10.3 Calculation of Sound Power Levels

12.3.1 Correct octave band pressure levels and "A" weighted sound levels for backgroudn noise in accordance with the appropriate section of the ISO/TC 43 documents on the "Determination of Sound Power Emitted By Noise Sources."

12.3.2 Void the test if the difference between the pump and background levels is less than 4 dBA. Exception: A manufacturer can use such data where the error prejudicial to his product is deemed acceptable.

12.3.3 Calculate octave band power levels and A-weighted sound power in accordance with the appropriate section of the ISO/TC 43 documents on the "Determination of Sound Power Emitted By Noise Sources," which applies to the space being used for the measurements.

13.0 METHODS OF ACOUNSTICAL MEASUREMENT AND POSITION OF MEASURING POINTS[1]

13.1 When measurements are made under free field, free field over a reflecting surface or semi-reverberant conditions, the microphone positions shall be arranged over a hemispherical surface centered about the center of the projection of the pump on the reflecting plane.

13.1.1 The radius of the hemispherical surgace shall be more than twice the maximum dimension of the pump (ignoring minor projections such as the shaft) but no less than one meter.

---

[1]Final recommendations to be prepared by Dr. Brownsey, Chairman WG-1. Notes are from previous documents.

13.1.2. Use at least four positions located central to equal
areas of the hemispherical surface. (See Table IV
and Fig. 4.

TABLE IV: COORDINATES FOR FOUR-POINT MICROPHONE ARRAY

$\dfrac{X}{r}$	$\dfrac{Y}{r}$	$\dfrac{Z}{r}$
-.40	.74	.53
-.40	-.74	.53
.84	0	.53
0	0	1.00

13.2 For measurements made under reverberant conditions, a single
microphone position can be used if adequate diffusion has been
shown to exist in accordance with Paragraph 8.0.

14.0 QUANTITIES TO BE MEASURED[2]

15.0 CALCULATION AND INTERPRETATION OF RESULTS[2]

16.0 TEST REPORT

16.1 An A-weighted sound power level and octave band sound power
levels for the bands of interest shall be reported for each
set of operating conditions specified.

16.2 A complete set of operating conditions consists of:

16.2.1 Shaft Speed
16.2.2 Discharge Pressure
16.2.3 Inlet Pressure
16.2.4 Inlet Temperature
16.2.5 Fluid Viscosity (cs, SUS)
16.2.6 Output Flow (%Displacement)
16.2.7 Case Pressure

16.3 The following data shall also be recorded for each pump tested:

16.3.1 Pump Description
16.3.2 Date of Test
16.3.3 Type of Fluid
16.3.4 Compensator Pressure Setting
16.3.5 Location of Test
16.3.6 Type of Test Space
16.3.7 Results of Test Space Verification

_____

[2] Paragraph 14.0 to be prepared by UK delegation to WG1. Paragraph 15.0
to be prepared by French delegation to WG1.

TABLE V-A: EXAMPLE DATA FOR EACH PUMP TESTED

Pump Description_____   Date of Test_____

Fluid _____   Compensator Pressure Setting_____

Location of Test_____   Type of Test Facility _____

Results of Test Facility Verification_____

_____

TABLE V-B: EXAMPLE DATA SUMMARY FOR ONE OPERATING CONDITION

Shaft Speed_____   Discharge Pressure_____

Inlet Temperature_____   Inlet Pressure_____

Fluid Viscosity_____   Output Flow_____

Case Pressure_____   % Displacement_____

Octave Band Center Frequency (Hz)	125	250	500	1000	2000	4000	8000
Sound Power Level (dB)							

Sound Power _____dBA
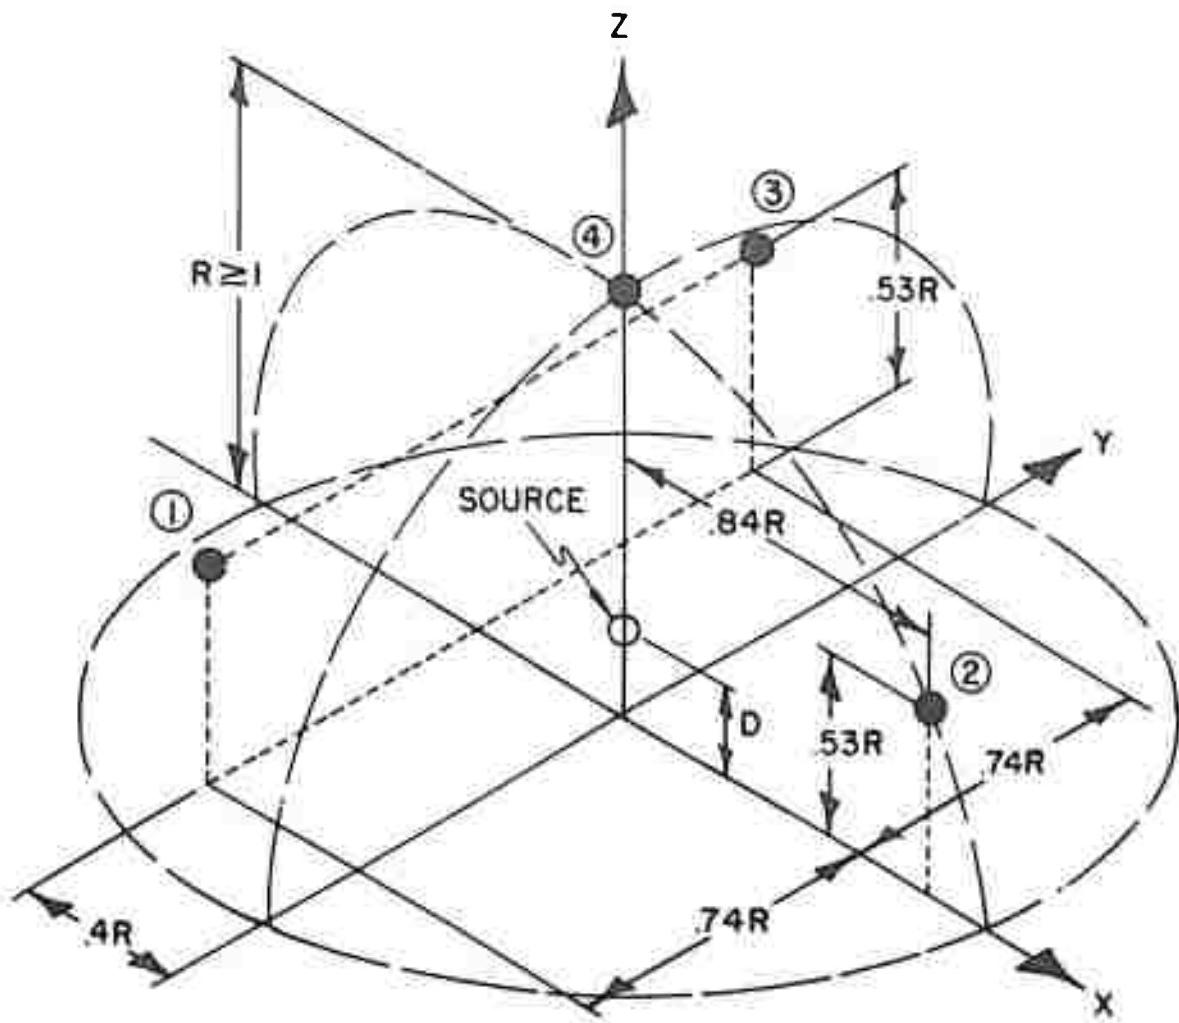
ALL DIMENSIONS IN METERS

$D \leq 1/6 R$

X-Y PLANE IS THE REFLECTING PLANE

Fig. F-1. Four-Point Measurement Array for Non-Reverberant Environments With Small Sources.

APPENDIX G

TEST CODE FOR MEASURING AND REPORTING FLUID-BORNE NOISE

EMITTED BY HYDRAULIC FLUID POWER PUMPS

NOTE: This document is a rough draft of one basic approach to measuring
       pump fluid-borne noise. It is intended only as a guide for the
       development of a test code. Another basic approach is outlined
       in Chapter II.

121

REFERENCES*

1. American National Standard Glossary of Terms for Fluid Power, ANSI/ B93.2, and Supplements Thereto. (ISO/TC 131/SC 1 USA-___).

2. ISO Recommendation R495, General Requirements for the Preparation of Test Codes for Measuring the Noise Emitted by Machines.

3. ISO Recommendation R1000, International Standard Rules for the Use of Units of the International System of Units and a Selection of the Decimal Multiples and Sub-Multiples of SI Units.

4. ISO Recommendation R1680, Test Code for the Measurement of the Airborne Noise Emitted by Rotating Electrical Machinery.

5. Society of Automotive Engineers Aerospace Recommended Practice, Determination of Hydraulic Pressure Drop, SAE/ARP 24B-1968.

---

*Unless otherwise noted, all references shall be in accordance with the latest revision.

C O N T E N T S

TEST CODE FOR MEASURING AND REPORTING FLUID-BORNE NOISE
EMITTED BY HYDRAULIC FLUID POWER PUMPS

- INTRODUCTION -

In hydraulic fluid power systems, power is transmitted and controll-
ed through a liquid under pressure within an enclosed circuit. Pumps
convert mechanical power into hydraulic fluid power. Pressure pulsations
are created in the hydraulic fluid during the power conversion process.
These pressure pulsations transmit vibrational energy to fluid conduits
and other components. The transmitted pulsations may ultimately cause
airborne noise. A pump's potential for directly causing airborne noise
is an important consideration in component selection. The results of this
procedure might be used to compare the pressure pulsations caused by two
different pumps.

1.0 SCOPE

To include the measurement and reporting of the pressure pulsations
caused by any hydraulic fluid power pump.

2.0 PURPOSE

To provide a means of comparing pressure pulsations associated with
hydraulic fluid power pumps where the comparable data have been measured
and reported according to a specific test procedure.

3.0 TERMS AND DEFINITIONS

4.0 UNITS

4.1 The International System of Units (SI) is used in accordance
with Ref. No. 3.

4.2 Approximate conversions to "Customary U.S." units are give for
informational purposes. These appear in parenthesis after their
SI counterparts.

5.0 LETTER SYMBOLS

6.0 GENERAL

6.1 Set up and maintain apparatus per sections 7 and 8.

6.2 Run all tests per Section 9.

6.3 Present data from Section 9 per Section 10.

7.0 TEST EQUIPMENT

7.1 Hydraulic Equipment

7.1.1 The hydraulic circuit is to include oil filter, oil cooler, and reservoir and restrictor valves as required to meet the pump hydraulic test conditions.

7.1.2 The test fluid and filtration level shall be in accordance with manufacturer's recommendations.

7.1.3 Exercise extra care in assembling inlet lines to prevent air leaking into the circuit.

7.1.4 Locate inlet restrictor valves upstream of the pump as far as practical to minimize aeration to pump inlet port.

7.1.5. Locate the inlet pressure gauge at the same height as the inlet fitting or calibrate gauge for height difference.

7.1.6 Use a needle valve (load valve) to create the required pump outlet pressure.

7.1.7 Locate the load valve at least 25 feet downstream of the pump outlet.

7.1.8 Locate a piezometer tube, constructed per Ref. 5 and of the same tube size as the pump outlet, as close as practical to the pump outlet.

7.1.9 Install a pressure pulsation attenuator, which dampens 20 dB at 100 Hz and higher frequencies, downstream of the piezometer tube but upstream of the load valve.

7.2 Mechanical Equipment

7.2.1 Construct the pump mount so that it will not add to or detract from the pressure pulsations.

7.3 Test Circuit

7.3.1 Verify the suitability of the test circuit per the appropriate procedure.

7.4 Measuring Instruments

7.4.1 Acoustical Analysis Instruments

7.4.1.1 Secure instrumentation that complies with the measuring instrument requirements of Ref. 4.

125

7.4.1.2 Calibrate the measuring instruments per Ref. 4.

7.4.2 Measure temperatures and pressures at the pump inlet and discharge fittings.

7.4.3 Pressure Instrumentation

7.4.3.1 Secure a dynamic pressure transducer and associated conditioning equipment which has an output voltage linearly proportional to pressure within $\pm$ 4% over a frequency range of 100 Hz to 10,000 Hz and a time constant of less than 15 seconds.

7.4.3.2 Insure that each unit in the pressure instrumentation system is calibrated at least every six months.

8.0 TEST CONDITIONS ACCURACY

Set up and maintain equipment accuracy within the limits of Table I.

TABLE I: TEST CONDITIONS ACCURACY

Test Conditions	SI Unit	U.S. Unit	Maintain Within $\pm$
Flow	ℓ/min	U.S. GPM	2%
Pressure, Pump Inlet	(Positive) bar	psig	2%
	(Negative) mm Hg	in Hg	2%
Pressure	bar	psig	2%
Speed	RPM	RPM	2%
Temperature	°C	°F	3°C(5°F)

9.0 TEST PROCEDURE

9.1 Transducer Preparations

9.1.1 Attach pressure transducer to piezometer tube with a minimum of tubing.

9.1.2 Insure that no air is trapped in the connecting line between the transducer and the piezometer tube.

9.2 Pulsation Measurements

9.2.1 Operate the pump at conditions specified in the test requirement.

9.2.2   Insure that the pump has been operated at test conditions
        for one hour previously or operate at specified conditions
        for one hour.

9.2.3   Stabilize all test conditions.

9.2.4   Wait 60 seconds after reaching a stabilized operating
        condition before proceeding to Clause 9.2.5.

9.2.5   Obtain measured pulsation mean levels in dB at each oc-
        tave band center frequency between 125 Hz and 8000 Hz.

9.2.6   Convert measurements of Clause 9.2.6 to dB values rel-
        ative to $20\mu N/M$.

9.2.7   Record the results of Clause 9.2.6 (See Table II.)

10. DATA PRESENTATION

10.1 Prepare a data summary using the results of Section 9.

10.2 Use Table II as an example summary.

10.3 Include the following information on the summary:

    10.3.1 Pump Description

    10.3.2 Fluid Viscosity (cSt, SUS)

    10.3.3 Date of Test

    10.3.4 Location of Test

    10.3.5 Shaft Speed

    10.3.6 Discharge Pressure.

    10.3.7 Inlet Pressure

    10.3.8 Inlet Temperature

    10.3.9 Type of Fluid

    10.3.10 Output Flow (for variable displacement units; also

            state percentage displacements, i.e. 90%, 5%, etc.)

    10.3.11 Case Pressure

10.3.12 Compensator Setting

10.3.13 Type of Pressure Transducer

10.3.14 Results of Test Circuit Verification

11. JUSTIFICATION STATEMENT

(To be included following completion of the review process.)

128

TABLE II-A: EXAMPLE DATA FOR EACH PUMP TEST

Pump Description_____   Date of Test_____

Fluid_____   Compensator Pressure Setting_____

Location of Test_____   Type of Test Circuit_____

Results of Test Circuit Verification_____

_____

TABLE II-B: EXAMPLE DATA SUMMARY FOR ONE OPERATING CONDITION

Shaft Speed_____   Discharge Pressure_____

Inlet Temperature_____   Inlet Pressure_____

Fluid Viscosity_____   Output Flow_____

Case Pressure_____   % Displacement_____

Octave Band Center Frequency (Hz)	125	250	500	1000	2000	4000	8000
Sound Pressure Level (dB)							

Fluid-borne Noise Level _____ dBA (re $20\mu N/M^2$)